



EXP 11: STUDY OF GPIO & BIT ADDRESSING IN AT89C51
DATE: 13/08/2026

PROGRAM:

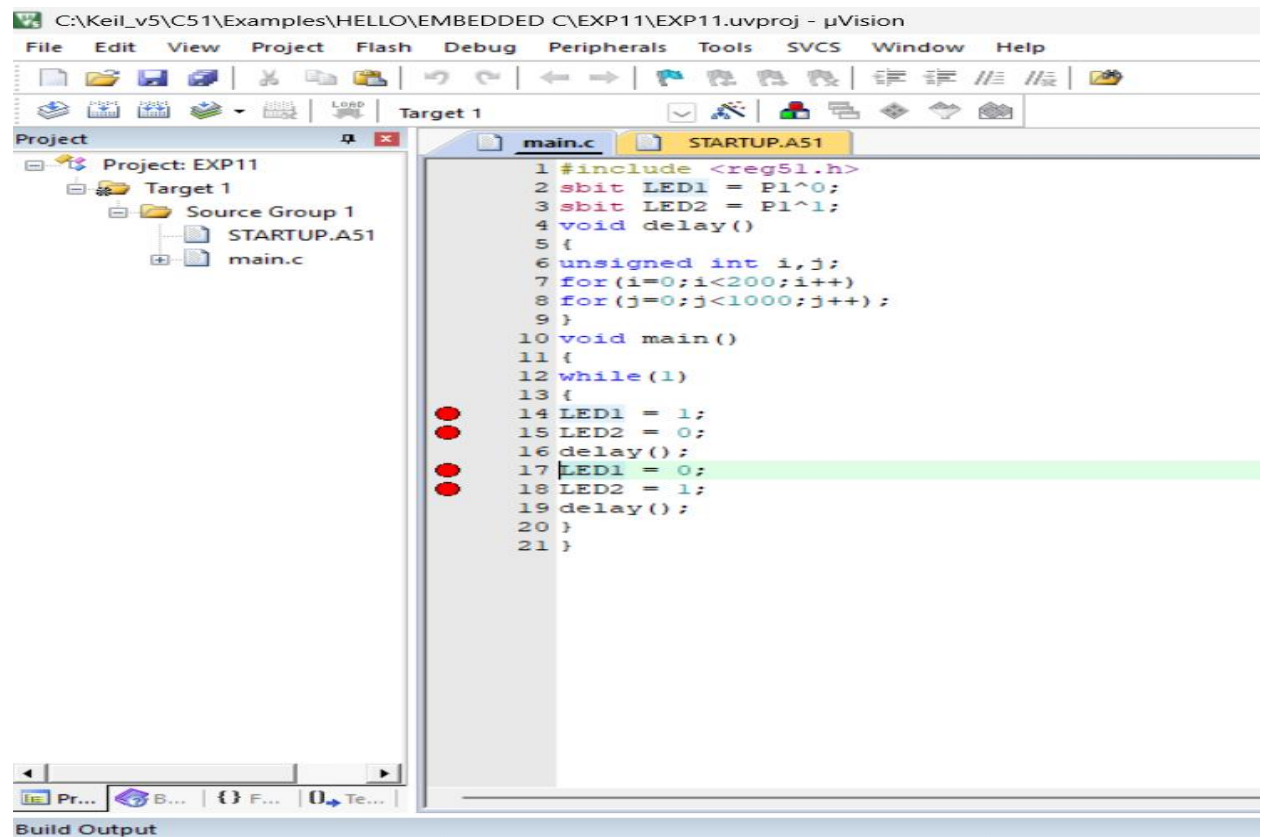

```
1 #include <reg51.h>
2 sbit LED1 = P1^0;
3 sbit LED2 = P1^1;
4 void delay()
5 {
6     unsigned int i,j;
7     for(i=0;i<200;i++)
8     for(j=0;j<1000;j++);
9 }
10 void main()
11 {
12     while(1)
13     {
14         LED1 = 1;
15         LED2 = 0;
16         delay();
17         LED1 = 0;
18         LED2 = 1;
19         delay();
20     }
21 }
```

OUTPUT:

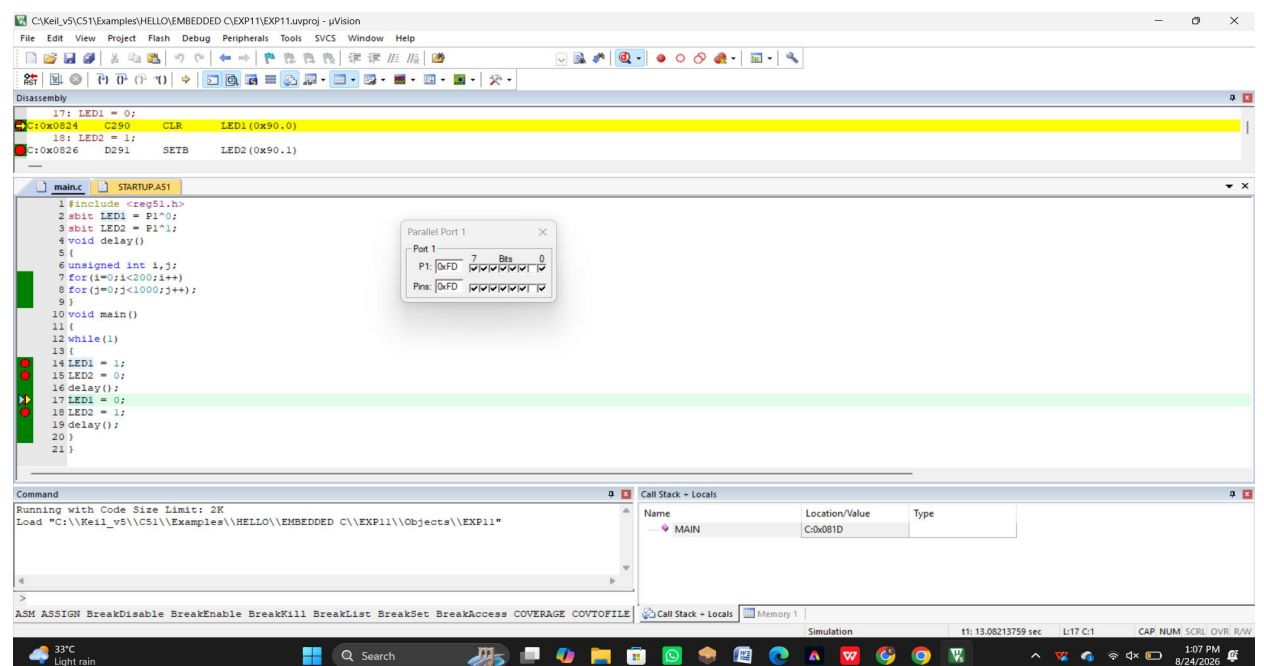

Disassembly

Address	Op-Code	Comment
17: LED1 = 0;		
C:\00824 C290 CLR LED1(0x90.0)		
18: LED2 = 1;		
C:\00826 D291 SETB LED2(0x90.1)		

Command

Running with Code Size Limit: 2K
Load "C:\Keil_v5\C51\Examples\HELLO\EMBEDDED C\EXP11\Objects\EXP11"

Call Stack - Locals

Name	Location/Value	Type
MAIN	C:\0081D	

Simulation

11:13.08213759 sec L17 C:1 CAP NUM SCRL OVR R/W

33°C Light rain