Daily Interface Traffic Report

Sunday, 11 October 2026 · 2026-10-11 00:00 – 24:00 · Asia/Riyadh (UTC+03:00)

COMPLETE

Data coverage 6/6 interfaces complete

DEMO - synthetic data, not measured · this is a layout example, not an operational report

INTERFACES REPORTING	HIGHEST PEAK UTILISATION	HIGHEST PEAK RATE	INTERFACES OVER 80% AT PEAK	DATA COMPLETENESS
6 / 6	86.6%	86.6 Mb/s	1	6 / 6
all with full coverage	DEMO-BRANCH-1 Gi0/0	at 11:40 · 5-min average	DEMO-BRANCH-1 Gi0/0	interfaces with ≥ 95% coverage

SITE OVERVIEW


SITE	LINK / BOUNDARY	INBOUND	OUTBOUND	AVG IN	AVG OUT	PEAK UTIL.	COVERAGE	STATUS
DEMO-HQ	DEMO-HQ-WAN (2 links)	5.9 TB	2.6 TB	548.9 Mb/s	238.0 Mb/s	54.6%	100%	COMPLETE
DEMO-BRANCH-1	Gi0/0 · ISP-ALPHA	461.1 GB	241.0 GB	42.7 Mb/s	22.3 Mb/s	86.6%	100%	COMPLETE
DEMO-BRANCH-2	Gi0/0 · ISP-GAMMA	920.3 GB	523.8 GB	85.2 Mb/s	48.5 Mb/s	33.9%	100%	COMPLETE
DEMO-DC	Te0/1 · ISP-ALPHA	14.6 TB	17.8 TB	1.4 Gb/s	1.6 Gb/s	33.3%	100%	COMPLETE
DEMO-DC	Te0/2 · ISP-BETA	2.2 TB	838.3 GB	204.3 Mb/s	77.6 Mb/s	N/A	100%	COMPLETE

Volumes are shown per interface, or as a total only for a configured boundary. Interfaces are never added together across boundaries.

KEY OBSERVATIONS

- 6 of 6 configured interfaces reported data; 0 with incomplete coverage.
- Busiest interface: DEMO-BRANCH-1 Gi0/0 peaked at 86.6 Mb/s (86.6% of 100.0 Mb/s).
- 1 interface(s) exceeded 80 % utilisation at peak: DEMO-BRANCH-1 Gi0/0 86.6%.

Peak utilisation by interface and direction (top 10, 5-minute averages)

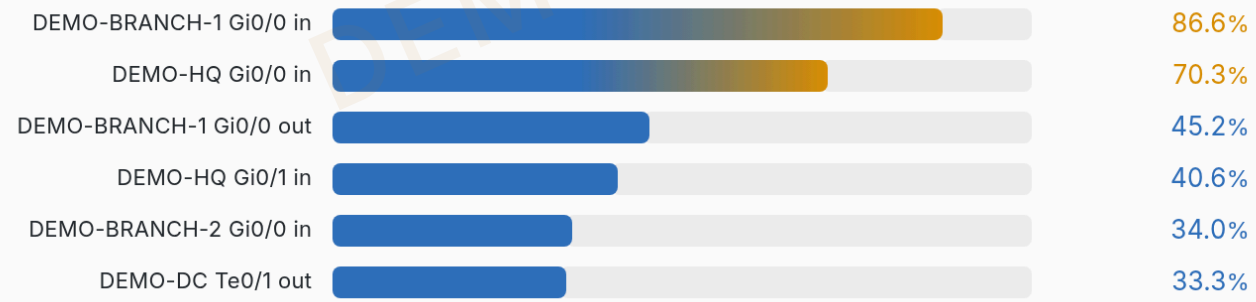

COLLECTION & COMPLETENESS

Status	COMPLETE
Interfaces reporting	6 / 6
Complete (≥ 95%)	6 / 6
Excluded by configuration	0
Samples excluded (over speed)	0

DEMO - SYNTHETIC DATA

Traffic Analysis


Sunday, 11 October 2026 · 2026-10-11 00:00 – 24:00 · Asia/Riyadh (UTC+03:00)

COMPLETE

Data coverage 6/6 interfaces complete


DEMO - synthetic data, not measured · this is a layout example, not an operational report

DEMO-HQ - Gi0/0 (ISP-ALPHA)

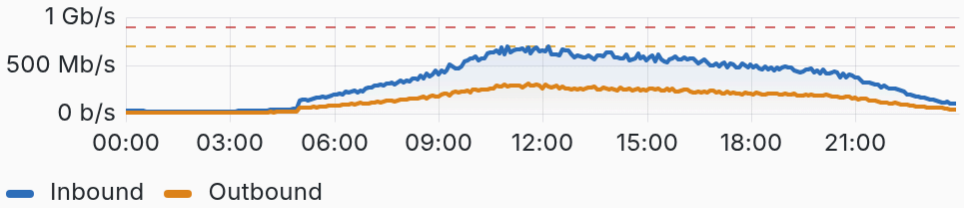


Link speed **1.0 Gb/s** · peak **702.9 Mb/s** (70.3%) 100% coverage COMPLETE

DEMO-HQ - Gi0/1 (ISP-BETA)

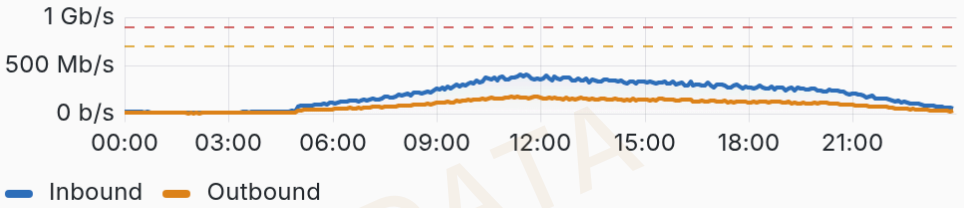


Link speed **1.0 Gb/s** · peak **406.1 Mb/s** (40.6%) 100% coverage COMPLETE

DEMO-BRANCH-1 - Gi0/0 (ISP-ALPHA)

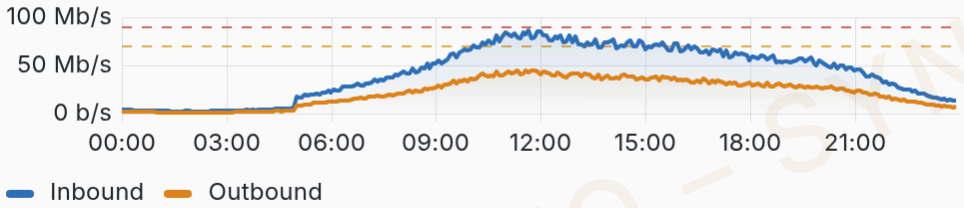


Link speed **100.0 Mb/s** · peak **86.6 Mb/s** (86.6%) 100% coverage COMPLETE

DEMO-BRANCH-2 - Gi0/0 (ISP-GAMMA)

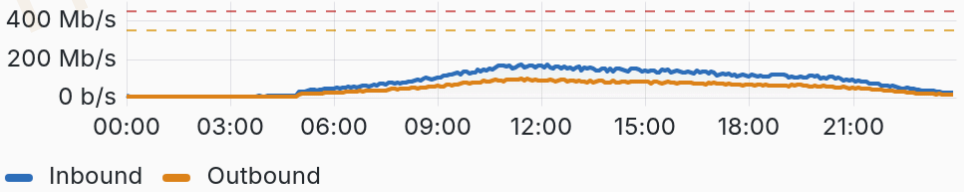


Link speed **500.0 Mb/s** · peak **169.7 Mb/s** (33.9%) 100% coverage COMPLETE

DEMO-DC - Te0/1 (ISP-ALPHA)

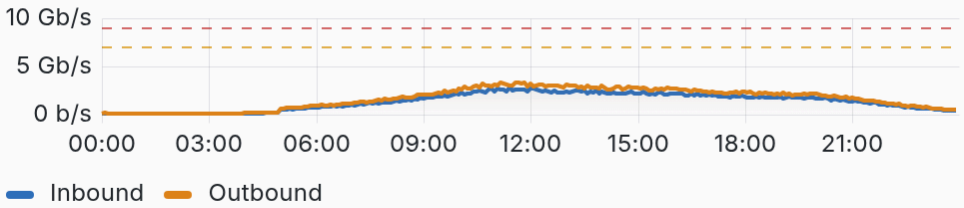

Link speed **10.0 Gb/s** · peak **3.3 Gb/s** (33.3%) 100% coverage COMPLETE

DEMO-DC - Te0/2 (ISP-BETA)

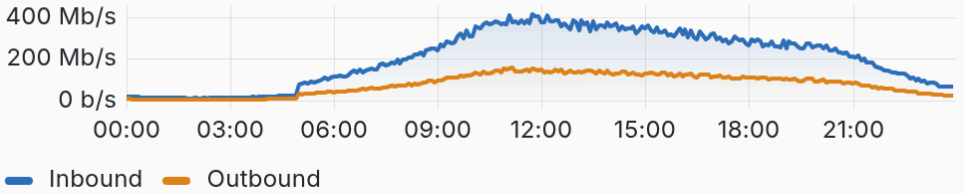

Link speed **not set** · peak **412.1 Mb/s** (utilisation N/A) 100% coverage COMPLETE

DEMO – SYNTHETIC DATA

Technical Details

Sunday, 11 October 2026 · 2026-10-11 00:00 – 24:00 · Asia/Riyadh (UTC+03:00)

COMPLETE

Data coverage 6/6 interfaces complete

DEMO - synthetic data, not measured · this is a layout example, not an operational report

INTERFACE SUMMARY

SITE	INTERFACE	SPEED	IN VOLUME	OUT VOLUME	AVG IN	AVG OUT	PEAK IN	PEAK OUT	PEAK UTIL.	Δ IN	Δ OUT	COV.	STATUS
DEMO-HQ	Gi0/0	1.0 Gb/s	3.8 TB	1.6 TB	350.4 Mb/s	150.8 Mb/s	702.9 Mb/s	308.2 Mb/s	70.3%	+8.0%	-5.1%	100%	COMPLETE
DEMO-HQ	Gi0/1	1.0 Gb/s	2.1 TB	942.3 GB	198.5 Mb/s	87.2 Mb/s	406.1 Mb/s	177.2 Mb/s	40.6%	+6.7%	-5.1%	100%	COMPLETE
DEMO-BRANCH-1	Gi0/0	100.0 Mb/s	461.1 GB	241.0 GB	42.7 Mb/s	22.3 Mb/s	86.6 Mb/s	45.2 Mb/s	86.6%	+7.1%	-4.9%	100%	COMPLETE
DEMO-BRANCH-2	Gi0/0	500.0 Mb/s	920.3 GB	523.8 GB	85.2 Mb/s	48.5 Mb/s	169.7 Mb/s	98.5 Mb/s	33.9%	+7.6%	-5.3%	100%	COMPLETE
DEMO-DC	Te0/1	10.0 Gb/s	14.6 TB	17.8 TB	1.4 Gb/s	1.6 Gb/s	2.8 Gb/s	3.3 Gb/s	33.3%	+7.5%	-5.1%	100%	COMPLETE
DEMO-DC	Te0/2	not set	2.2 TB	838.3 GB	204.3 Mb/s	77.6 Mb/s	412.1 Mb/s	158.2 Mb/s	N/A	+7.8%	-4.7%	100%	COMPLETE

TOP 10 BUSIEST INTERFACES (BY PEAK UTILISATION)

	INTERFACE	PEAK RATE	PEAK UTILISATION
1	DEMO-BRANCH-1 Gi0/0	86.6 Mb/s	86.6%
2	DEMO-HQ Gi0/0	702.9 Mb/s	70.3%
3	DEMO-HQ Gi0/1	406.1 Mb/s	40.6%
4	DEMO-BRANCH-2 Gi0/0	169.7 Mb/s	33.9%
5	DEMO-DC Te0/1	3.3 Gb/s	33.3%
6	DEMO-DC Te0/2	412.1 Mb/s	N/A

MISSING-DATA INDICATORS

All 6 interfaces reported with at least 95% coverage.

Excluded interfaces (not reported): none.

DATA QUALITY & METHODOLOGY

- Rates come from the Zabbix interface items (Bits received / Bits sent), already converted from SNMP counters by Zabbix; a counter reset appears as a missing sample, never as zero or as a spike.
- Averages use the time actually covered by samples; coverage shows how much of the day that is. Utilisation = rate / configured interface speed and is N/A when no speed is configured.
- Samples above the configured interface speed (+5 %) are excluded as anomalies and counted in the data-quality table - they usually mean a wrong speed setting.
- Totals are shown only for explicitly configured boundaries and only over intervals where all member interfaces reported. Interfaces are never added together otherwise.

DEMO – SYNTHETIC DATA