

STONE POLYMER COMPOSITE SPC

LUXURIOUS VINYL TILE LVT



Bartley Biz Centre  
Blk 15 Kaki Bukit Rd 4, #01-44,  
Singapore 417808  
UEN: 201208665Z



david@ezzogenics.com

**CALL NOW**  
**6968 3098**

**WWW.EZZOGENICS.COM**

# ABOUT US

---



At Ezoogenics, we specialize in providing top-quality flooring solutions, offering a range of options including SPC (Stone Plastic Composite), LVT (Luxury Vinyl Tile), and laminate flooring. With a commitment to excellence, we focus on delivering flooring that combines durability, style, and functionality to meet the needs of modern commercial spaces.


Our SPC flooring is perfect for high-traffic areas, offering superior water resistance and long-lasting performance, while LVT adds a touch of elegance, mimicking the look of wood or stone with the durability of vinyl. For those seeking cost-effective yet stylish options, our laminate flooring provides a versatile solution, ideal for a wide variety of commercial environments.



## WHAT IS SPC FLOORING

SPC flooring is a sophisticated and innovative flooring solution that stands for Stone Plastic Composite. As the name suggests, SPC flooring is made by blending natural limestone powder, polyvinyl chloride, and stabilizers. The result is an incredibly sturdy and robust core layer that forms the backbone of this advanced flooring option. The only flooring that can really compare to SPC in terms of robustness is solid wood flooring, but at around twice the price it doesn't fall within the budget constraints that SPC flooring buyers often seek.

## SPC FLOORING STRUCTURE

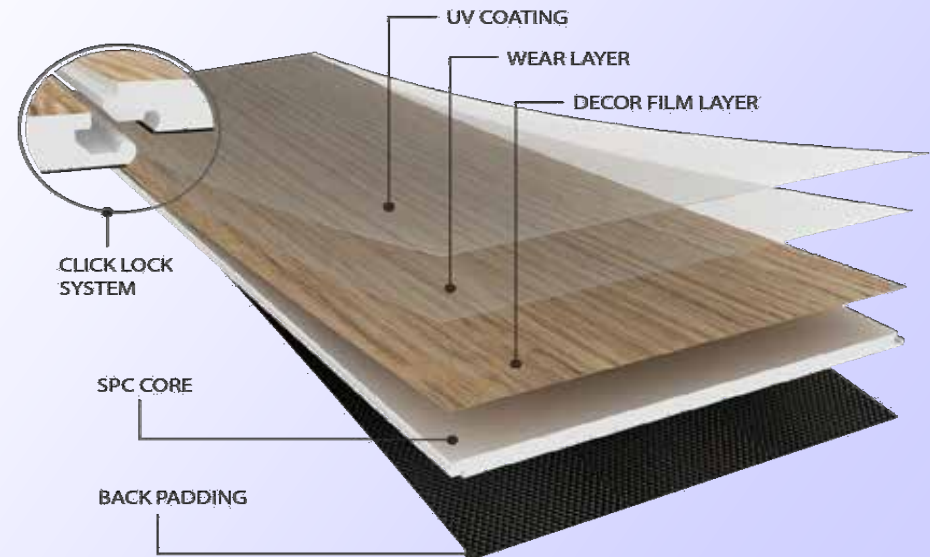

SPC flooring's unique composition gives it an unparalleled blend of strength, durability, and aesthetic appeal. Available in an array of designs and styles such as tile, plank and herringbone, it's a perfect choice for homeowners seeking an affordable, yet classy flooring solution. Additionally, the advanced engineering behind SPC flooring also results in a product that is eco-friendly. The manufacturing process utilises recycled materials and creates less waste, contributing to a smaller environmental footprint. Such credentials put SPC flooring in its own league against its alternatives.

# ADVANTAGES OF SPC FLOORING



## Eco-friendly

SPC flooring is non-toxic and free from formaldehyde, a dangerous chemical used in many flooring products that can cause respiratory issues, irritate the eyes, nose, and throat, and effect healthy.



## Wear-resistance

SPC flooring is resistant to impacts, stains, scratches. The strong wear resistance makes it the preferred flooring for schools, shopping malls, and other places that have a high requirement of scratch-resistant.



## Fire Proof

SPC flooring has an excellent fire rating of B1 and does not produce suffocating harmful or toxic fumes in the event of an accident due to its Eco composition.



## Easy to install

SPC flooring can be easy to install with it's click. Without any glue when installed only use a rule and a knife is enough.



## Anti-slippery

The wear layer of SPC flooring has special anti-slipproperties, and compared with ordinary floor materials,you'll feel more astringent when there is water, anditisless likely to slip.



## Waterproof

As the main composition of SPC flooring is vinyl resinand stone powder, it's not hydrophilic. It will not bedamaged even if it is soaked for a long time, andit will not be mildewed due to high humidity. It's perfect forbusiness owners, pets, and water-prone areas.



# SPC SPECIFICATIONS

Product Name	SPC (Stone Plastic Composite) Flooring
Main series	Wood grain, Marble stone grain, Parquet, Herringbone, and etc.
Surface treatment	UV Coating (ultraviolet curing coating) with embossed surface (B/P wood grain surface, Matt, Crystal, Stone grain, EIR) embossed Or customized
Wood grain/color	Oak, Birch, Cherry, Hickory, Maple, Teak, Antique, Mojave, Walnut, Mahogany, Marble effect, Stone, White, Black, Grey or as required
Wear layer thickness	0.2-0.8mm, Common is 0.3mm.
Rigid Core material	100% virgin PVC powder and stone powder
Thickness	3.5-8mm
Size (L x W)	184*1220mm, 203*1220, 240*1520mm, 240*1800mm, 600*300mm, 640*1280mm or Customized
Under layer (Back foam)	IXPE, EVA
Click System	Unilin, Valinge, or as required.
Green rating	E0, formaldehyde-free
Edge	Chamfer, Microchamfer or Right angle.
Advantages	Eco friendly, Waterproof, Fire resistance, Anti-slip, Scratch resistant, Easy click install.
Certificate	CE, SGS, or apply for any certificates you need.
Application	Commercial building, Office, Hotel, Hall, Household.
MOQ	600 Square Meters.
Delivery time	15-25 days
Transport package	Cartons with pallets
Payment method	T/T, L/C, Online payment or as negotiated.
HS CODE	391890

# SPC FLOORING SIZE

1220 \* 182mm as popular size

3.5mm

4.0mm

4.2mm

5.0mm



3.5mm + 1mm

4.0mm + 1.5mm

4.2mm + 1.5mm

5.0mm + 1.5mm

5.5mm + 1.5mm

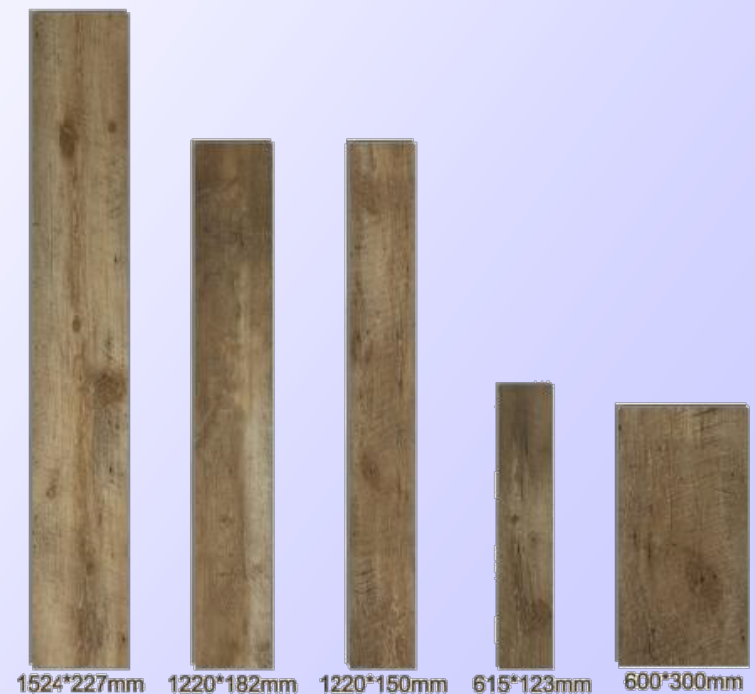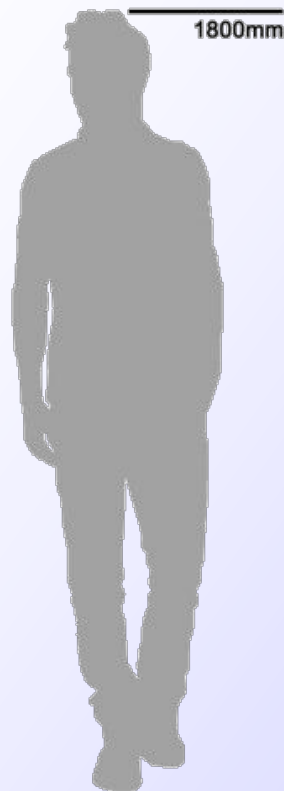

# SPC FLOORING COLORS

MULTIPLE COLORS

Contact us for more colors



# SPC FLOORING APPLICATIONS



BED ROOM



LIVING ROOM



DINING ROOM



CHILDREN'S ROOM



OFFICE




HOTEL




# LVT FLOORING —


## Lvt Click

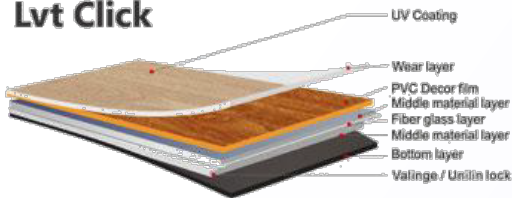

## Dry Back

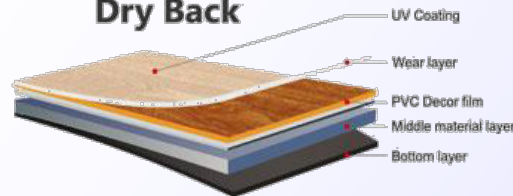

## Looselay Structure

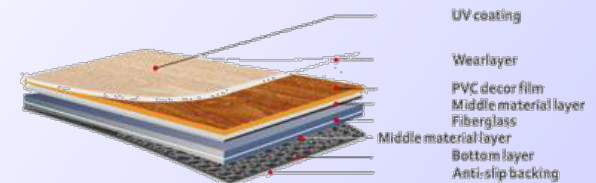

LVT stands for luxury vinyl tile. It realistically mimics natural materials like stone, marble, travertine, or wood. At the same time, it offers numerous benefits including lower cost, improved scratch resistance, and waterproof performance. LVT includes a photographic print layer to capture the realistic looks and a wear layer for increased durability. It's available in planks or tiles.

LVT flooring delivers the ideal combination of everything a commercial flooring product should be – elegantly designed, highly durable, and easy to maintain. Luxury vinyl tile means not having to sacrifice high-quality design for industrial utility.



# LVT SPECIFICATIONS

Product Name	LVT(Luxury Vinyl Tile) Flooring
Main series	Wood grain, Stone grain
Surface treatment	Embossed surface
Wood grain/color	Oak, Birch, Cherry, Hickory, Maple, Teak, Antique, Mojave, Walnut, Mahogany, Marble effect, Stoneeffect, White,Black,Grey or as required
Wear layer thickness	0.1-0.7mm.
Rigid Core material	100% Virgin PVC powder
Thickness	1.5-5.5mm
Size (L x W)	152*914mm, 152*1219mm, 228*1219mm
Under layer (Back foam)	IXPE, EVA
Instalation method	Dry back, Loose lay, Self adhesive, Click.
Advantages	Eco friendly,Waterproof, Fireresistance, Anti-slip, Scratch resistant, Easy click install.
Edge	Chamfer, Microchamferor Right angle.
Certificate	CE, SGS, or apply for any certificates you need
Application	Commercial building,Office, Hotel, Hall, Household.
MOQ	600 Square Meters
Delivery time	15-25 days
Transport package	Cartons with pallets
Payment method	T/T, L/C,Online payment or as negotiated.
HS CODE	391890

# STONE POLYMER COMPOSITE SPC LUXURIOUS VINYL TILE LVT

---



---

Bartley Biz Centre  
Blk 15 Kaki Bukit Rd 4, #01-44,  
Singapore 417808  
UEN: 201208665Z

[www.ezzogenics.com](http://www.ezzogenics.com) | 6968 3098 | [david@ezzogenics.com](mailto:david@ezzogenics.com)