


Repeater

중계기



Safe FIRE SOLUTIONS
SYSTEM
(주) 세이프씨스템


Repeater 2-circuit

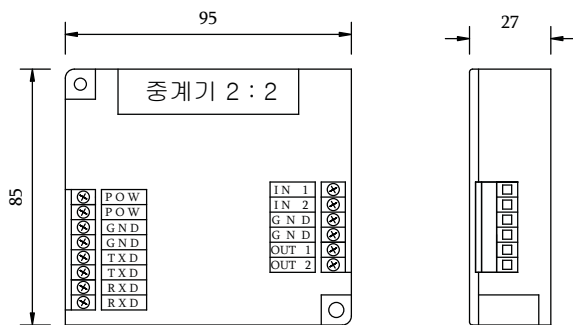

TERM-22

Type approval number	JOONG02-2-1
Rated voltage	DC24V \pm 20%
Current consumption – monitor	20mA
Current consumption – control	45mA / 75mA
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Circuit capacity	2 monitor(Input) / 2 control (Output)
Use	Monitor and control installations
Frame type	Poly Carbonate
Frame size	95(W)*85(H)*27(D)
Color	Ivory

Repeater 4-circuit

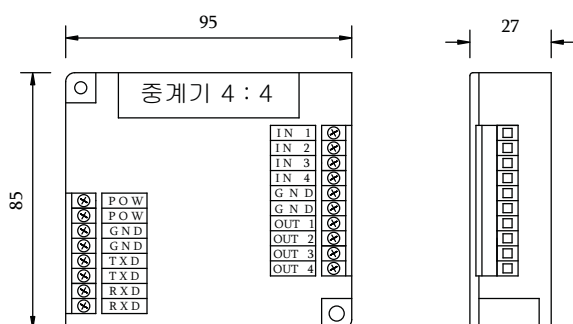

TERM-44

Type approval number	JOONG 99-12-1
Rated voltage	DC24V \pm 20%
Current consumption – monitor	25mA
Current consumption – control	50mA / 75mA/ 105mA/ 130mA
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Circuit capacity	4 monitor(Input) / 4 control (Output)
Use	Monitor and control installations
Frame type	Poly Carbonate
Frame size	95(W)*85(H)*27(D)
Color	Ivory