Fire alarm Combination box

T-ST / T-SU

Type	Recessed type / exposure type
Frame type	STEEL / SUS
Frame size	250(W)*650(H)*100(D)
Color	5Y 7/1(STEEL)

Maual call point

FR-I24

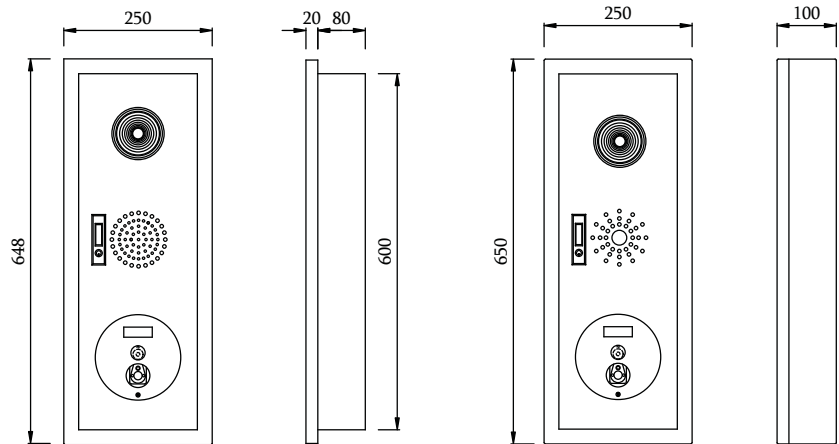|	
Type approval number	BAL10-11
Rated voltage	±20%
Current consumption	119mA
Surrounding temperature	-10~50℃
Relative humidity	0~90%
Product material	Poly Carbonate
Product size	250(W)*650(H)*100(D)
Color Red	Red
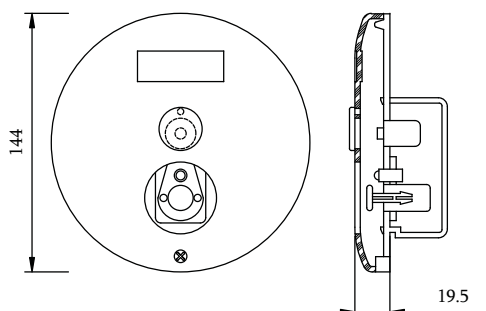
Fire alarm Combination panel
발신기 세트

Alarm bell
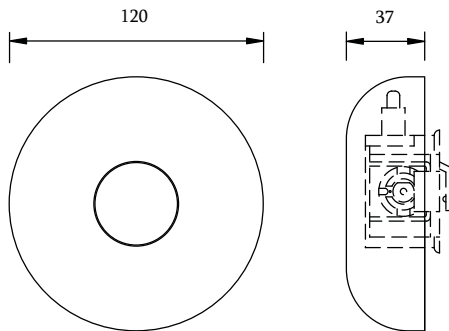
BL-O24

Type approval number	KYUNG11-8
Rated voltage	DC24V ±20%
Current consumption	50mA
Surrounding temperature	-10~50℃
Relative humidity	0~90%
Sound level	90dB (from 1m away)
Operation method	Motor type
Frame material	Al(70%)+Fe+Cu
Frame size	120ø(D)*37(H)
Color	Red

120 37

Indication lamp
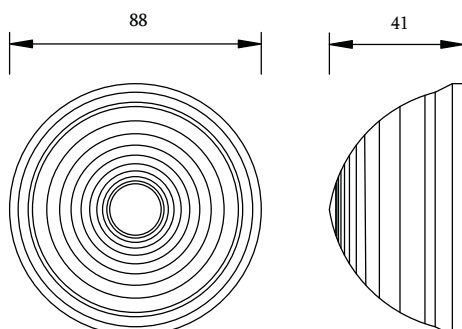
PL-O24

Rated voltage	DC24V ±20%
Current consumption	20mA
Surrounding temperature	-10~50℃
Relative humidity	0~90%
Installation standard	Above where fire alarm is installed RangeShould be distinguished from 10m away from 15˚ (or more) range from where installed
Frame type	Poly Carbonate
Frame size	88ø(D)*41(H)
Color	Red

88 41

31