


Other product

기타 제품



Safe SYSTEM
FIRE SOLUTIONS
(주) 세이프씨스템


Electronic siren

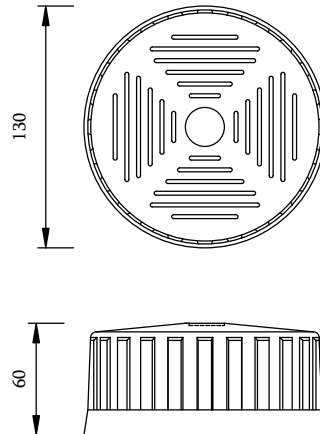

SR-O24

Rated voltage	DC24V $\pm 20\%$
Current consumption	125mA
Frame material	Poly Carbonate
Product size	130 ϕ (D)*60(H)
Color	White


Door release

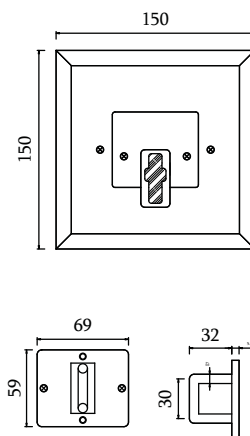

DR-O24

Rated voltage	DC24V $\pm 20\%$
Current consumption	300mA
Bearing capacity	Standard 25kg (15kg~70kg)
Operation type	Solenoid type
Recessed box	Rectangular box (3")
Product size	150(W)*150(H)*54(D)
Color	Silver

Emergency outlet

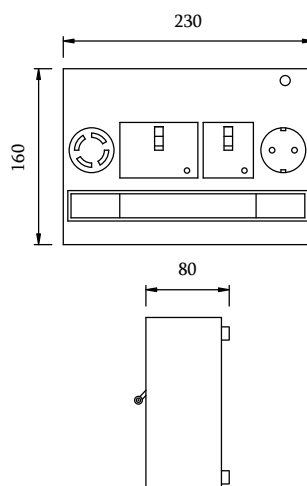

EC-2P-3P

Three-phase N.F.B	3P 30AF / 30AT
Single-phase N.F.B	2P 20AF / 20AT
Three-phase outlet	3P 30A 480V (4 pole)
Single phase outlet	2P 15A 250V (3 pole)
Product size	230(W)*160(H)*80(D)
Color	White


Other product

기타 제품



Safe SYSTEM
(주) 세이프씨스템


Discharge indicating lamp

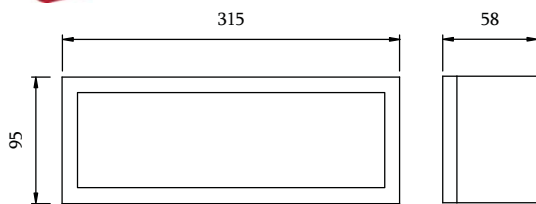

EM-O24

Rated voltage	DC24V $\pm 20\%$
Light source	10W incandescent lamp* 5
Frame material	0.6mm ABS
Product size	315(W)*95(H)*58(D)
Color	Red


Strobe

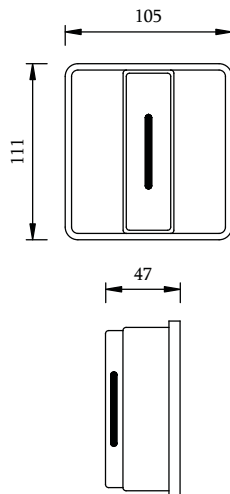

VA-O24

Type approval number	SHIGAK09-4 / KFI certified
Rated voltage	DC24V $\pm 20\%$
Current consumption	120mA
Light source	Xenon Lamp
Intensity	20cd
Frame material	Poly Carbonate
Frame size	105(W)*111(H)*47(D)
Color	Red

Foot light

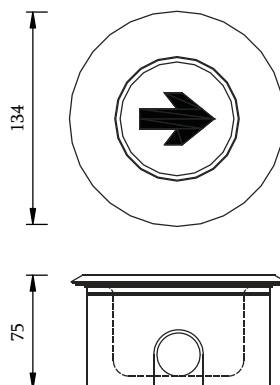

EL-ST-C

Type approval number	YU10-36
Rated voltage	DC24V $\pm 20\%$
Rated current	40mA
Current consumption	0.3W
Light source	High flex LED
Power	Provided by a separate battery
Product size	134 ϕ (D)*75(H)
Color	White