

Exit light

유도등



Safe SYSTEM
(주) 세이프씨스템


Small one-sided emergency exit light (LED type)



SF-LED-RF-SS(W)

Type approval number	YU09-55
Class and type	AC220V/DC3.6V/emergency exit/ small/non-shield type/LED type/ one-sided/back light time 60 minute
High efficiency certification No.	LED exit light No. 126
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 400mAh
Current consumption	1.9W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	147(W)*183.5(H)*44(D)
Color	White

Small one-sided aisle exit light (LED type)

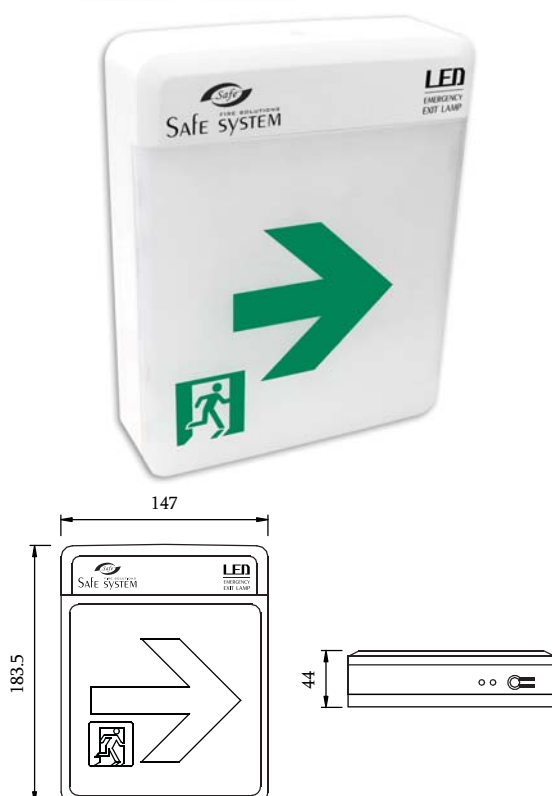

SF-LED-CP-SS(W)

Type approval number	YU09-42
Class and type	AC220V/DC3.6V/aisle/small/ non-shield type/LED type/ one-sided/back light time 60 minute
High efficiency certification No.	LED exit light No. 128
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 400mAh
Current consumption	2.5W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	147(W)*183.5(H)*44(D)
Color	White



Exit light

유도 등



Safe SYSTEM
(주) 세이프씨스템



Medium one-sided emergency exit light (LED type)



SF-LED-RF-MS(W)

Type approval number	YU09-64
Class and type	AC220V/DC3.6V/emergency exit/ medium/non-shield type//LED type/ one-sided/back light time 60 minute
High efficiency certification No.	LED exit lightNo. 127
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 600mAh
Current consumption	3.8W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	220(W)*245(H)*50(D)
Color	White

Medium one-sided room pathway exit light (LED type)



SF-LED-LP-MS(W)

Type approval number	YU09-63
Class and type	Class and type AC220V/DC3.6V/ roompathway/medium/non-shield type/ LED type/one-sided/ back light time 60 minute
High efficiency certification No.	LED exit light No. 129
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 600mAh
Current consumption	3.8W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-type/3-type
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	220(W)*245(H)*50(D)
Color	White


Exit light

유도등



Safe SYSTEM
FIRE SOLUTIONS
(주) 세이프씨스템


Medium one-sided/double-sided emergency exit light (Ceiling type)

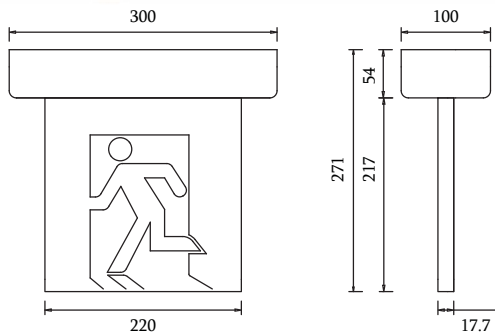

SF-LED-RF-MC(C) / SF-LED-RF-MD(C)

Type approval number	YU10-47(one-sided) / YU10-34(double-sided)
Class and type	AC220V/DC3.6V/emergency exit/medium/ non-shield type/LED type/ one-sided, double-sided/ back light time 60 minute
High efficiency certification No.	LED exit lightNo. 195(one-sided)
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 600mAh
Current consumption	3.8W(one-sided), 3.8W(double-sided)
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	300(W)*271(H)*100(D)
Color	White

Medium double-sided room pathway exit light (ceiling type)

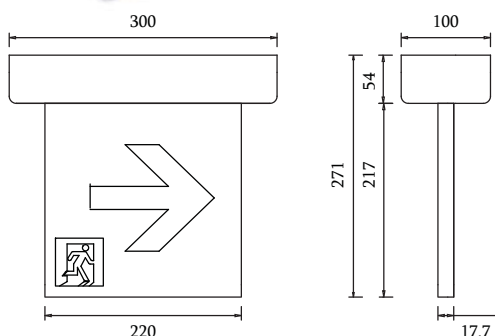

SF-LED-LP-MD(C)

Type approval number	YU10-35
Class and type	AC220V/DC3.6V/room pathway/medium/ non-shield type/LED type/ double-sided/back light time 60 minute
High efficiency certification No.	LED exit lightNo. 193
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 600mAh
Current consumption	5W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery: Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	300(W)*271(H)*100(D)
Color	White

Exit light

유도 등



Safe SYSTEM
(주) 세이프씨스템


Medium one-sided emergency exit light (LED type, wide type)

SF-LED-RF-MC(W-WD)



Type approval number	YU10-53
Class and type	AC220V/DC3.6V/emergency exit/ medium/non-shield type/ LED type/one-sided/ back light time 60 minute
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 600mAh
Current consumption	3.5W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Steel, Poly Carbonate
Frame size	509(W)*165.5(H)*46.5(D)
Color	White

Medium one-sided stairway exit light (LED type)

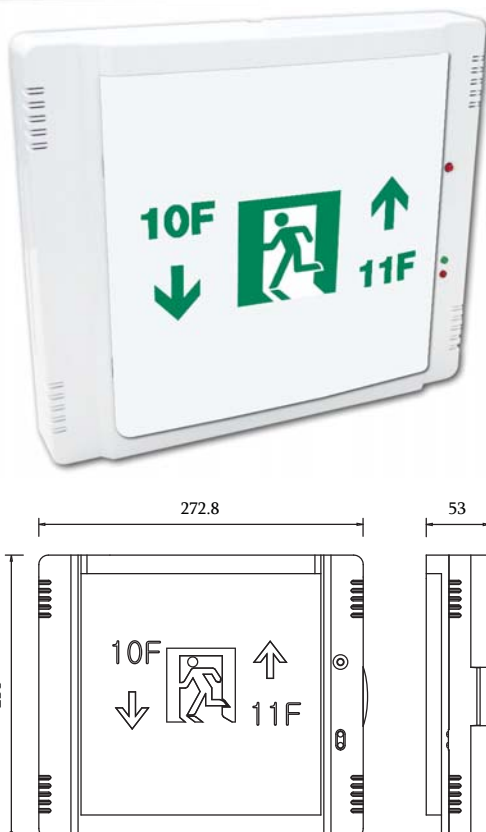

SF-LED-SP-MC(W)


Type approval number	YU11-4
Class and type	AC220V/DC7.2V/stairway/medium/ non-shield type/LED type/ one-sided/back light time 60 minute
High efficiency certification No.	LED exit light No. 194
Rated voltage	AC220V 50~60Hz
Battery	DC7.2V Ni-Cd 900mAh
Current consumption	4W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	272.8(W)*238(H)*53(D)
Color	White

유도등



Safe SYSTEM
(주) 세이프씨스템


Large one-sided emergency exit light (ceiling type)

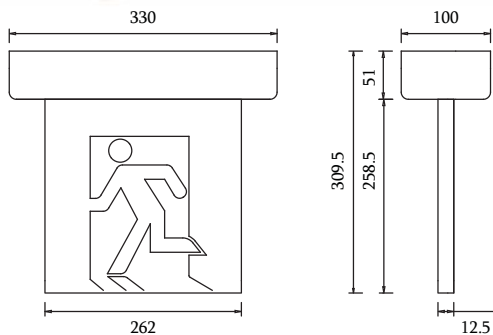

SF-LED-RF-LS(C)

Type approval number	YU11-69
Class and type	AC220V/DC3.6V/emergency exit/ large/non-shield/LED type/ one-sided/back light time 60 minute
Rated voltage	AC220V 50~60Hz
Battery	DC3.6V Ni-Cd 600mAh
Current consumption	7W
Surrounding temperature	-10~50℃
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	330(W)*309.5(H)*100(D)
Color	White

Medium floor mounted concealed aisle exit light

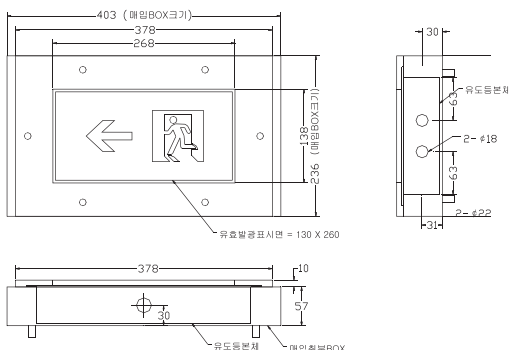

EL-FR266SL3-P

Manufacturer	allitlife
Class and type	AC220V/DC4.8V/aisle/medium/ one-sided/LED type/ back light time 60 minute
Rated voltage	AC220V 50~60Hz
Battery	DC4.8V Ni-Cd 600mAh
Current consumption	3.8W
Surrounding temperature	-10~50℃
Relative humidity	0~90%
Connection type	2-wire/3-wire
Frame type	Aluminum, tempered glass
Frame size	403(W)*138(H)*57(D)

Exit light


유도등




Safe SYSTEM
(주) 세이프씨스템

Small one-sided stairway exit light (LED type)

SF-LED-SP-SC(W)

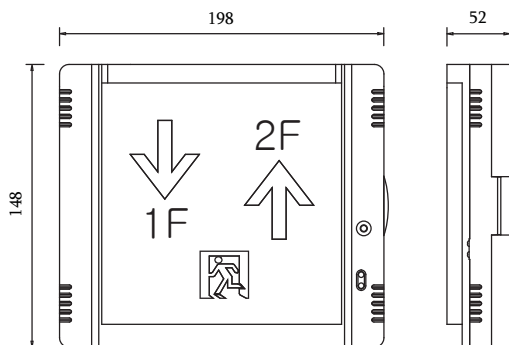

Type approval number	YU11-8
Class and type	AC220V/DC7.2V/stairway/small/ non-shield type/LED type/ one-sided/back light time 60 minute
Rated voltage	AC220V 50~60Hz
Battery	DC7.2V Ni-Cd 900mAh
Current consumption	2.6W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Poly Carbonate
Frame size	198(W)*148(H)*52(D)
Color	White

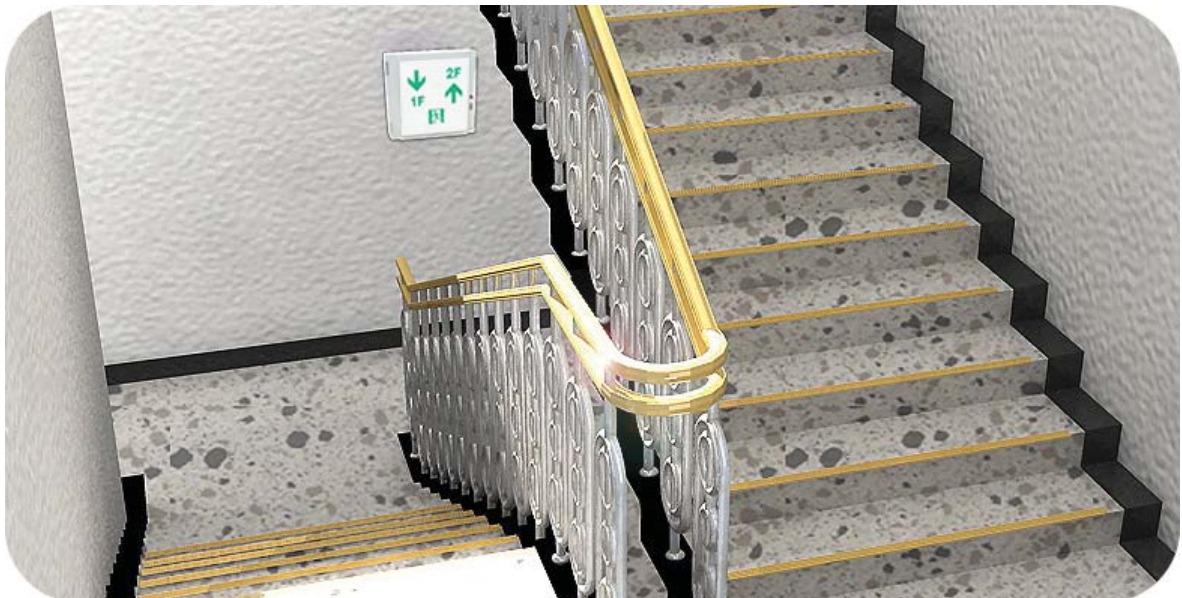

Exit light

유도등



Safe SYSTEM
(주) 세이프씨스템

Large sound flickering one-sided/double-sided emergency exit light



EL-CS250S-SV(One-sided) / EL-CS250D-SV(Double-sided)

Manufacturer	alllifelife
Class and type	AC220V/DC7.2V/emergency exit/ large/one-sided, double-sided/ CCFL type/back light time 60 minute
Rated voltage	AC220V 50~60Hz
Battery	DC7.2V Ni-Cd/700mAh(one-sided)/ 1200mAh(double-sided)
Current consumption	7.8W(one-sided) / 10W(double-sided)
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Aluminum, EGI, Poly Carbonate
Frame size	Refer to floor plan
Color	Ivory

Large sound flickering one-sided emergency exit light



EL-WS250S-SV

Manufacturer	alllifelife
Class and type	AC220V/DC7.2V/emergency exit/ large/one-sided/ CCFL type/back light time 60 minute
Rated voltage	AC220V 50~60Hz
Battery	DC7.2V Ni-Cd 700mAh
Current consumption	7.8W
Surrounding temperature	-10~50°C
Relative humidity	0~90%
Connection type	2-wire/3-wire
Inspection switch	For monitoring commercial power For monitoring battery : Red LED source : Green LED
Frame type	Aluminum, EGI, Poly Carbonate
Frame size	445(W)*309(H)*65(D)
Color	Ivory