

FINAL EXAM

NAME:


ACTIVITY 1 (3 PTS)

Consider the following multimedia communications scenario:

- There are 2 User Agents (A and B) and an Application Server (AS) that acts as a B2BUA
- A y B represent human users
- The AS manages the web calling service. It is NOT an RTP entity (it does not handle media traffic)
- 100rel is not supported
- Neither A nor B generate early media
- A and B only support PCMA voice (payload type=8)
- A's IP address=1.1.1.1, A's media port=13000
- B's IP address=2.2.2.2, B's media port=14000

It is requested to represent the signaling flow indicating the name of the SIP messages and the SDP content (only c and m line) for the following scenario:


- A requests via web that the AS sets up a call between A and B
- AS uses 3PCC mechanisms in order to establish the call between A and B on behalf of A

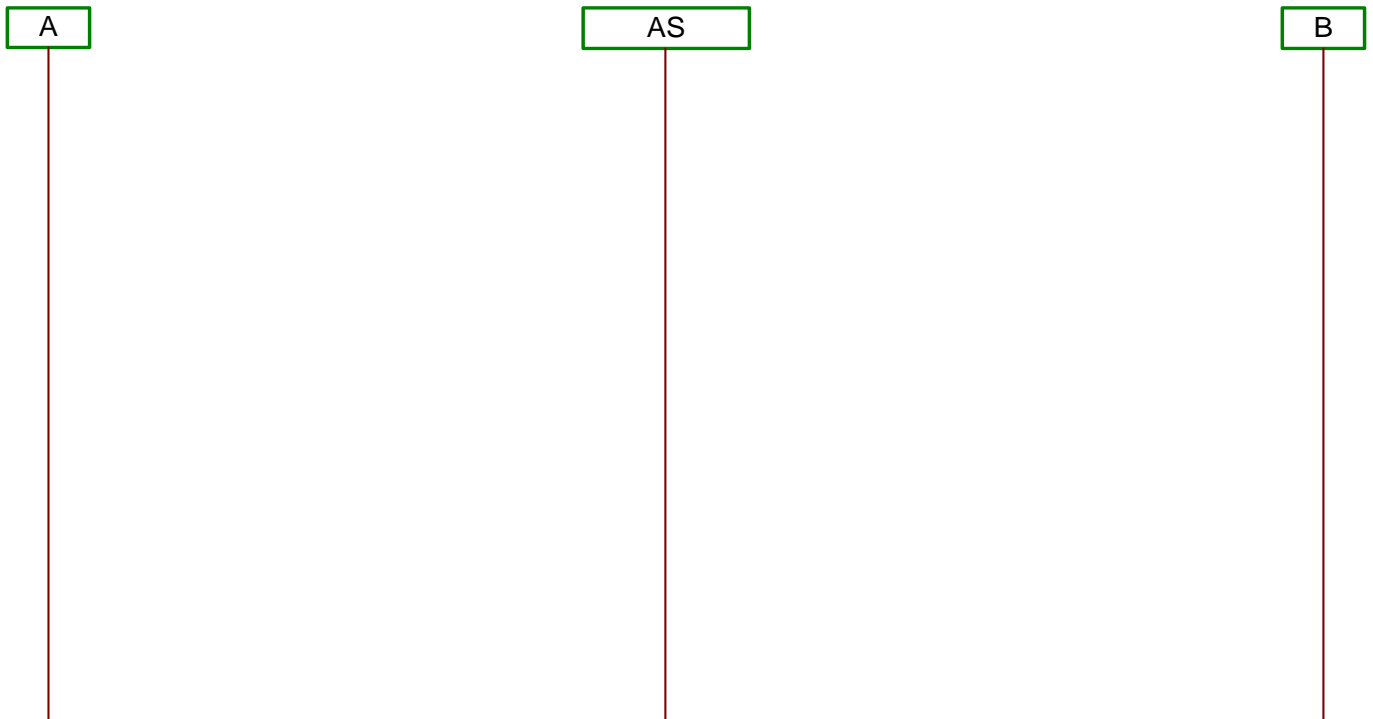

NAME:

ACTIVITY 2 (2 PTS)

The following flow shows a scenario that involves several SIP proxies:

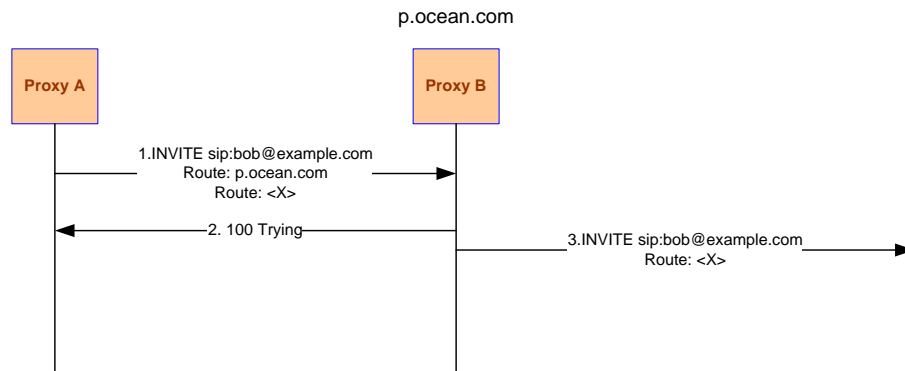

INVITE in step 1 contains two Route headers. There is a DNS , reachable by all the nodes, that contains the following entries:

Name	AddresType	RR Type	Order	Pref.	Flags	Service	Reg Ex	Replace
example.com	IN	NAPTR	20	50	"s"	"SIP+D2T"		_sip._tcp.example.com
example.com	IN	NAPTR	30	50	"s"	"SIP+D2U"		_sip._udp.example.com

Name	Address Type	RR Type	Priority	Weight	Port	Target
_sip_udp.example.com	IN	SRV	10	1	5080	proxy4.example.com
_sip_udp.example.com	IN	SRV	20	1	5080	proxy5.example.com
_sip_tcp.example.com	IN	SRV	10	1	5090	proxy6.example.com
_sip_tcp.example.com	IN	SRV	20	1	5090	proxy7.example.com
example.com	IN	SRV	10	1	5090	example.com
example.com	IN	SRV	20	1	5090	backup.example.com

NAME:

Name	Addres Type	RR Type	Address
proxy4.example.com	IN	A	192.168.74.4
proxy5.example.com	IN	A	192.168.74.5
proxy6.example.com	IN	A	192.168.74.6
proxy7.example.com	IN	A	192.168.74.7
example.com	IN	A	192.168.74.8
backup.example.com	IN	A	192.168.74.9

It is requested to indicate the value of the IP address, port and protocol used to generate the INVITE message in step 3, based on the value of the Route header:

Route header	IP	puerto	protocolo
sip:192.168.74.2;lr			
sip:192.168.74.2:5085;lr			
sip:example.com;lr			
sip:example.com;transport=udp;lr			
sip:example.com:5070;lr			

NAME:

ACTIVITY 3 (2 PTS)

Please, answer the following questions related to RTP:

- (1) Let us assume that a RTP sender splits a coded video frame in 3 packets before sending it. If the previous frame timestamp contained an integer value of 25, which will be the RTP timestamp value of the third packet in the video frame? We assume that the frequency of the media clock at the sender is 90KHz and FPS=30.
- (2) A RTP sender generates PCM coded audio at 16 bits per sample. How many octets does the RTP payload have if we assume that P=0 in the RTP header? Information: In the SDP exchange, the offer included the following lines:
 - ptime=40
 - maxptime=40
- (3) A host has two connected video cameras and two connected microphones. It is transmitting the respective signals towards another host in the Internet by using the RTP protocol. The host is using two RTP sessions, one for audio and another one for video.
 - How many different synchronization sources exist?
 - How does the RTP receiver know how to correlate the audio signals with the corresponding video signals in order to achieve lipsync?
- (4) A RTP transmitter of PCM coded voice at 8-bit has received a RTCP RR packet with the following values: LSR=1200, DLSR=400. If the time as indicated by the media clock in the RTP transmitter when it receives the previous RTCP RR is 2000, which is the RTT in milliseconds?

ACTIVITY 4 (2 PTS)

Please answer the following questions related to SDP:

(1) Indicate if the following SDP exchange is correct or not. Why?.

OFFER

```
v = 0
o = - 2890844526 2890844526 IN IP4 host1.ocean.com
s = -
c = IN IP4 host1.ocean.com
t = 0 0
```

ANSWER

```
v = 0
o = - 2890877711 2890822211 IN IP4 host2.ocean.com
s = -
c = IN IP4 host2.ocean.com
t = 0 0
m = audio 42000 RTP/AVP 0
a = rtpmap:0 PCMU/8000
```

(2) Indicate if the following SDP exchange is correct or not. Why?

OFFER

```
v = 0
o = - 2890844526 2890844526 IN IP4 pc.ocean.com
s = -
c = IN IP4 host.ocean.com
t = 0 0
m = audio 49170 RTP/AVP 0
a = rtpmap:0 PCMU/8000
a=sendonly
```

ANSWER

```
v = 0
o = - 2890897755 2890899432 IN IP4 host.sea.com
s = -
c = IN IP4 host.sea.com
t = 0 0
m = audio 42000 RTP/AVP 0
a = rtpmap:0 PCMU/8000
a = inactive
```

(3) Indicate if the following SDP exchange is correct or not. Why?.

OFFER

```
v = 0
o = - 2890844526 2890844526 IN IP4 host.ocean.com
s = -
c = IN IP4 host.ocean.com
t = 0 0
m = audio 49170 RTP/AVP 0
a = rtpmap:0 PCMU/8000
m = video 51372 RTP/AVP 31
a = rtpmap:31 H261/90000
```

ANSWER

```
v = 0
o = - 2890897755 2890899432 IN IP4 host.sea.es
s = -
c = IN IP4 host.sea.es
t = 0 0
m = audio 42000 RTP/AVP 0 100
a = rtpmap:0 PCMU/8000
a = rtpmap:100 telephone-event/8000
```

(4) Given the following SDP offer generated by host A, which is the maximum data rate generated in the session?

```
v = 0
o = - 2890844526 2890844526 IN IP4 host.sea.es
s = -
c = IN IP4 host.ocean.com
t = 0 0
m = audio 49170 RTP/AVP 0
a = rtpmap:0 PCMU/8000
b = AS:64
b = RS:800
b = RR:2400
```
