



HYDROPHONE DIRECTIVITY

Under Test: TC4032-2
S/N: 2820001
Reference: TC4033
Date: 2020-09-01
Session, Run: 30888, 1
Max RR: -173.0 dB re 1 μ Pa/V at 1m
SL Right: 20.0°, -0.2dB dB re 1 μ Pa/V at 1m
Comment: Horizontal.


Amplitude: 10.0 Vrms
Pulse Width: 150.0 μ s
Angle: -180.0° to 180.0°
Frequency: 100.00 kHz

Temperature: 24.14°C
Depth: 1.2 m
Distance: 0.60 m
Tested by: PRA

For all plots!
2020-09-01 TRA



3 sept

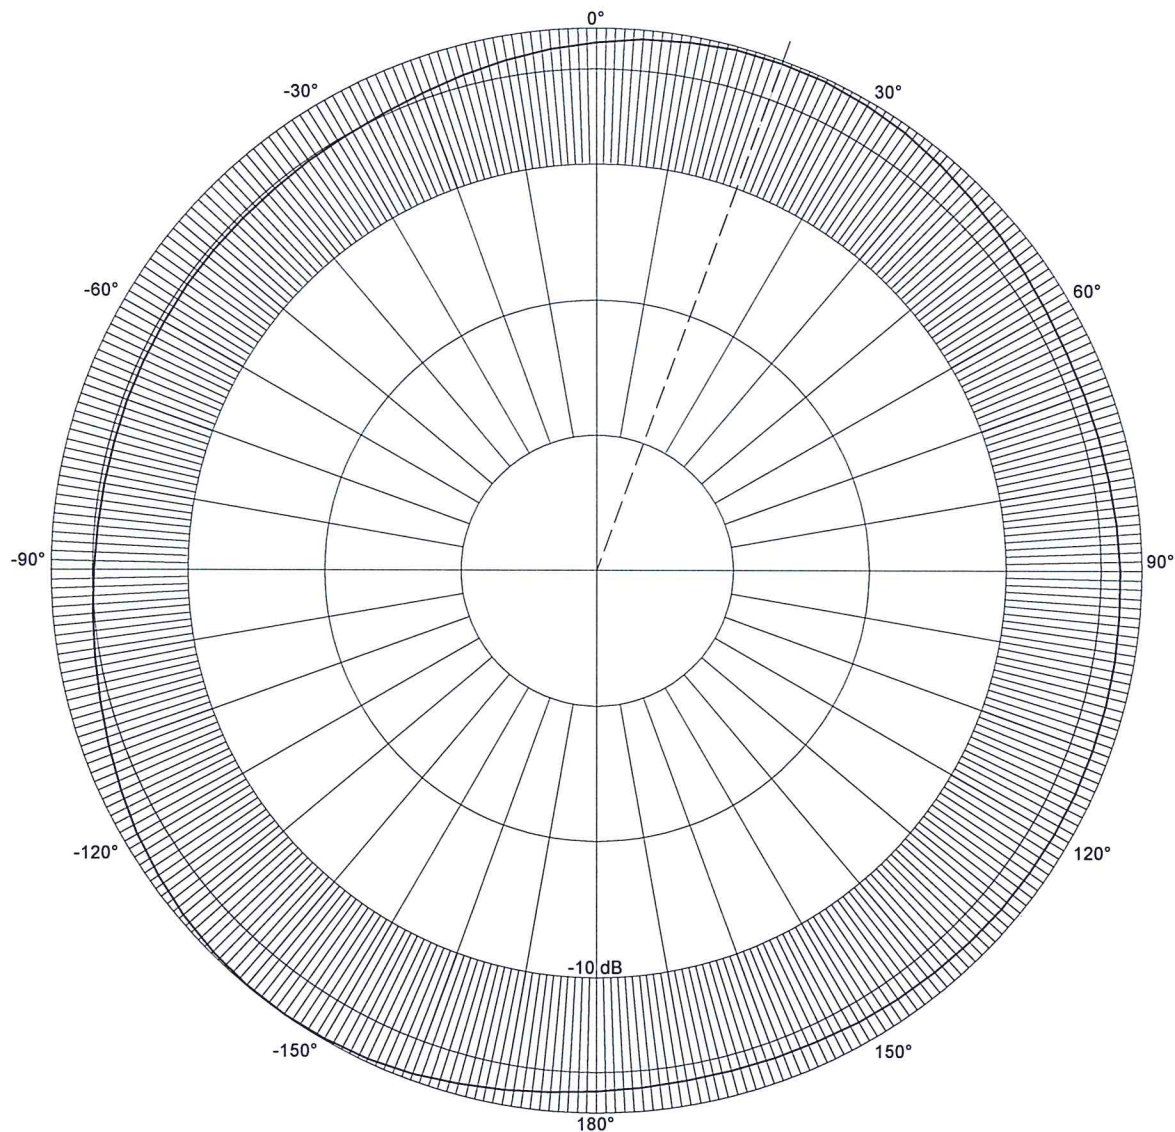




Under Test: TC4032-2
S/N: 2820001
Reference: TC4033
Date: 2020-09-01
Session, Run: 30886, 3
Max RR: -171.3 dB re 1 μ Pa/V at 1m
W: 338.4°
Comment: Vertical.

HYDROPHONE DIRECTIVITY

Amplitude: 10.0 Vrms
Pulse Width: 800.0 μ s
Angle: -180.0° to 180.0°
Frequency: 15.00 kHz

Temperature: 24.14°C
Depth: 1.2 m
Distance: 0.60 m
Tested by: PRA

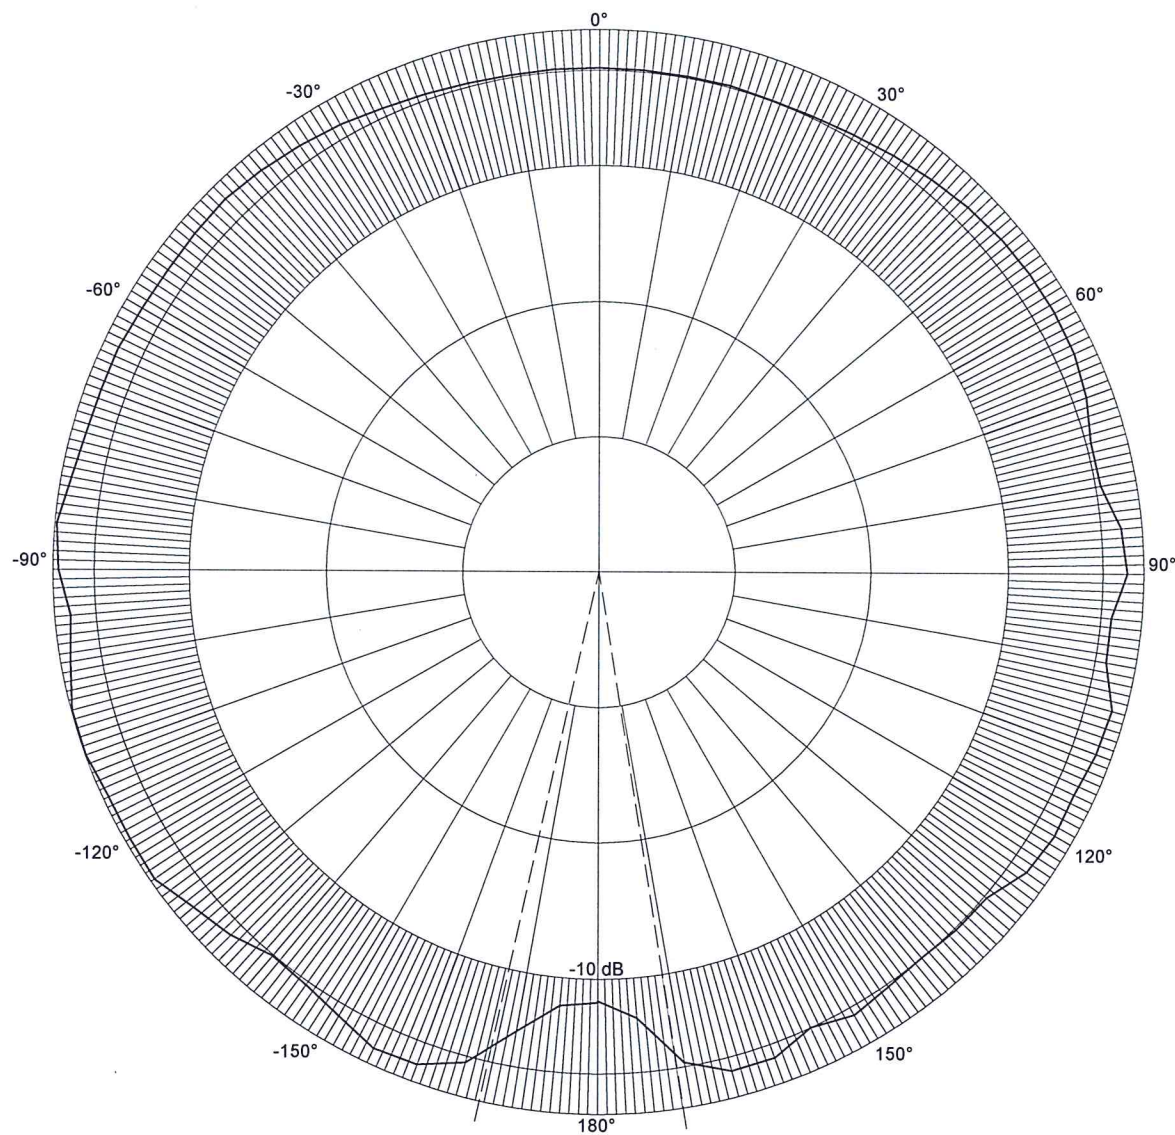



Under Test: TC4032-2
S/N: 2820001
Reference:
Date: 2020-09-01
Session, Run: 30888, 2
Comment: PHO @ 250 Hz: -170.7 dB.

HYDROPHONE SENSITIVITY

Amplitude: 10.0 Vrms
Pulse Width: 214.3 μ s
Rep Rate: 50.0 ms
Averages: 8

Temperature: °C
Depth: 0.0 m
Distance: 0.00 m
Tested by: PRA

