



Isometric view (3:1)




Suited to standard 1.6mm PCB production processes and tolerances, which typically result in thickness of 1.55mm ±0.1mm.

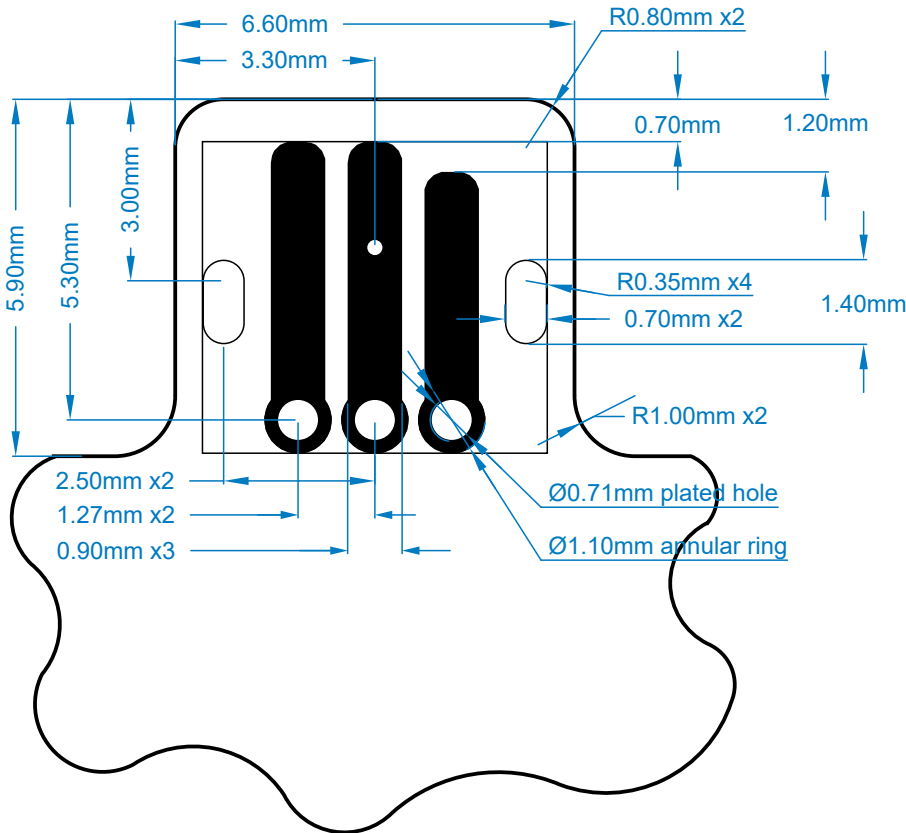

PCB Top (8:1)

Tolerances as per typical PCB production processes.

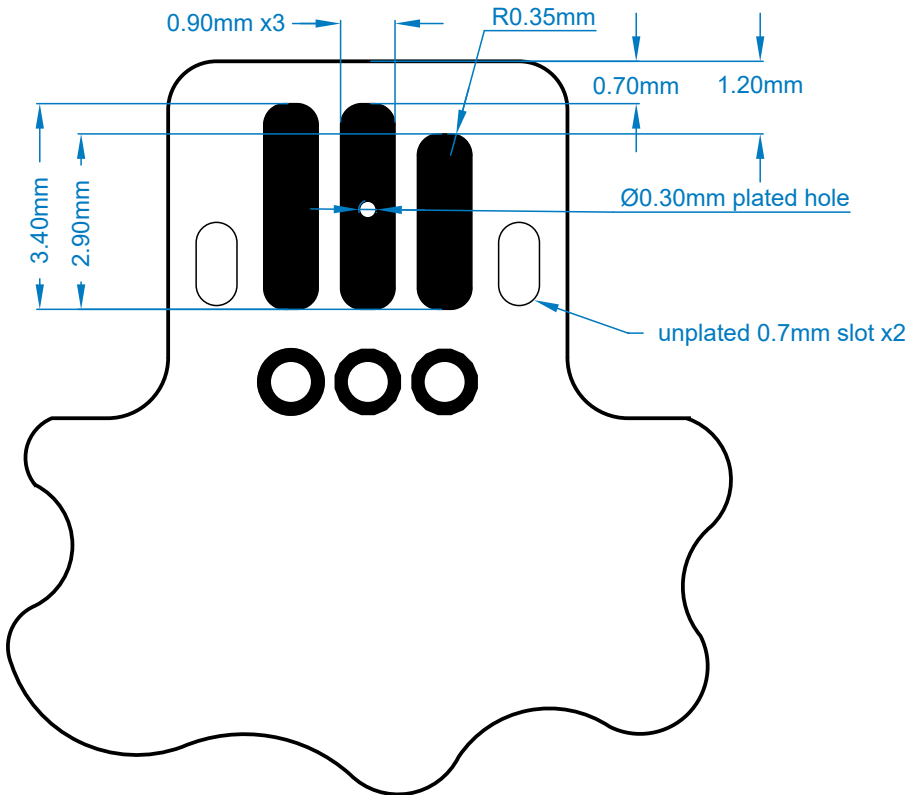

PCB Bottom (8:1)

Jacdac PCB edge connector specification

PROJECT JacdacEdgeConnectorRef

DRAWING FILENAME JacdacEdgeConnectorRef 101.PcbDwf

LICENCE Attribution 4.0 International (CC BY 4.0)	Microsoft		
UNITS Millimeters	REVISION 1.0	LAST MODIFIED 14/06/2022	
DRAWN BY S. Hodges	ID 101-1.0	PAGE 1 OF 2	


This information is provided "as-is". You bear the risk of using it. Some information relates to pre-released specification which may change without notice. Microsoft makes no warranties, express or implied, with respect to the information provided here.

Plated via connects
pin 2 on top with
pin 2 on bottom.


All fingers finished with gold,
e.g. immersion gold (ENIG)
plating. Recommended
thickness 0.05µm (2µ").

Chamfered PCB edge
allowed but not mandated.



Apply solder resist where
there is no exposed metal.

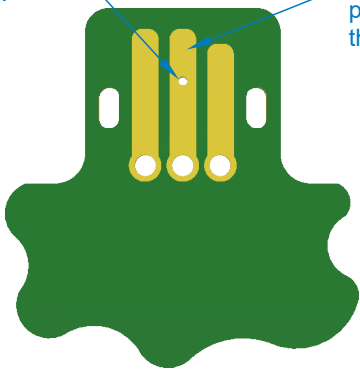


PCB from above

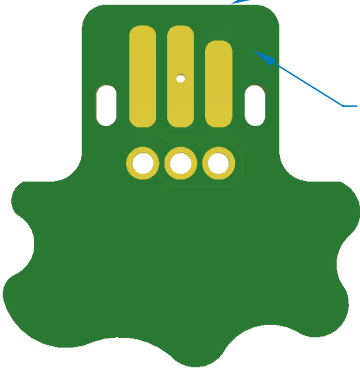


PCB from below

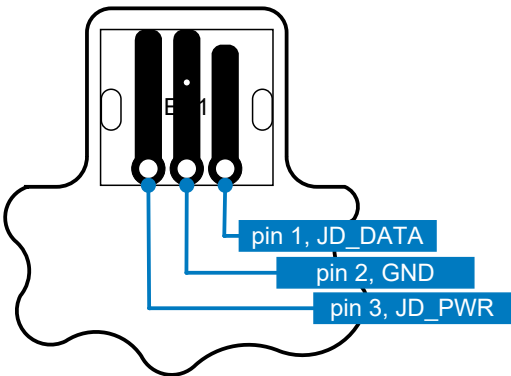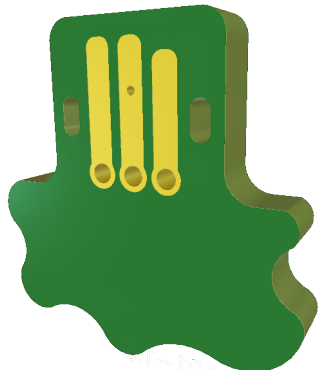

Pin numbering from above

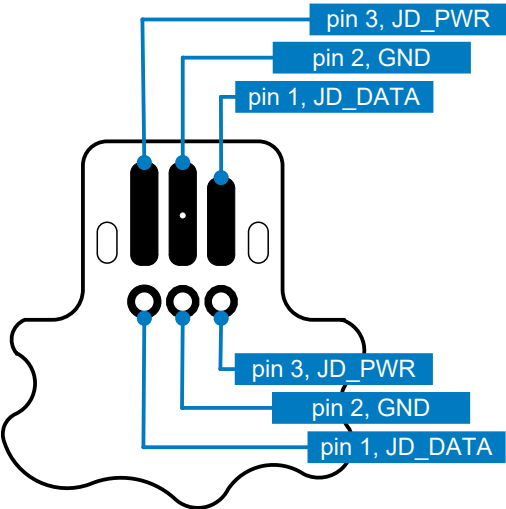

Pin numbering from below

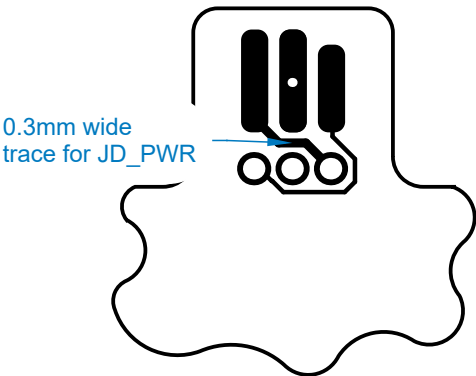

Suggested routing from below

Jacdac PCB edge connector specification

LICENCE Attribution 4.0 International (CC BY 4.0)			Microsoft
UNITS Millimeters	REVISION 1.0	LAST MODIFIED 14/06/2022	
DRAWN BY S. Hodges		ID 101-1.0	PAGE 2 OF 2

PROJECT JacdacEdgeConnectorRef DRAWING FILENAME JacdacEdgeConnectorRef 101.PcbDwf

This information is provided "as-is". You bear the risk of using it. Some information relates to pre-released specification which may change without notice. Microsoft makes no warranties, express or implied, with respect to the information provided here.