


User Guide:

Steps:

1. Unscrew the three screws at the top of the tripod riser using a flathead screwdriver and remove the PVC cap. **Note:** If the cover is tight, it is easiest to wiggle it back and forth to release the tension.




2. Mount the iOptron head to the top of the tripod riser using the bolt and washer provided.

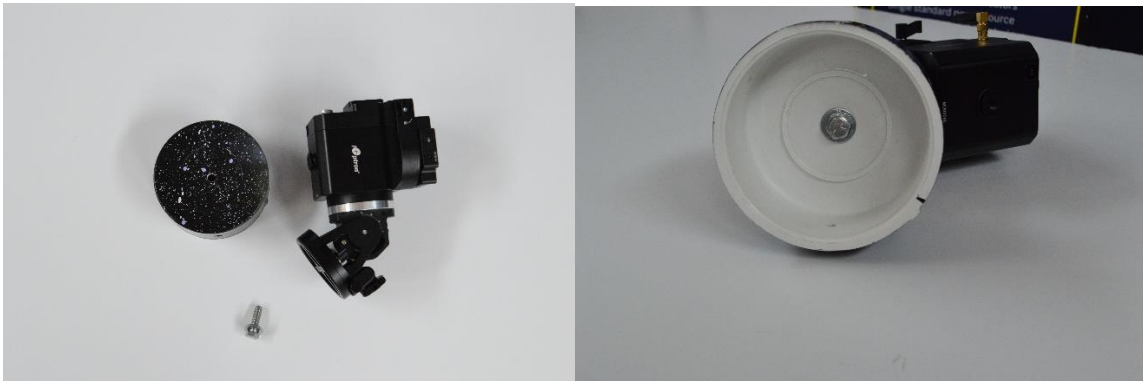

3. Reattach the top of the tripod riser to the exposed PVC coupler. Ensure the ridges of both the top and bottom PVC caps are perfectly aligned.




4. Replace the three screws. **Caution:** Do not over-torque these screws; they are prone to stripping. They only need to be tight enough to not fall out.

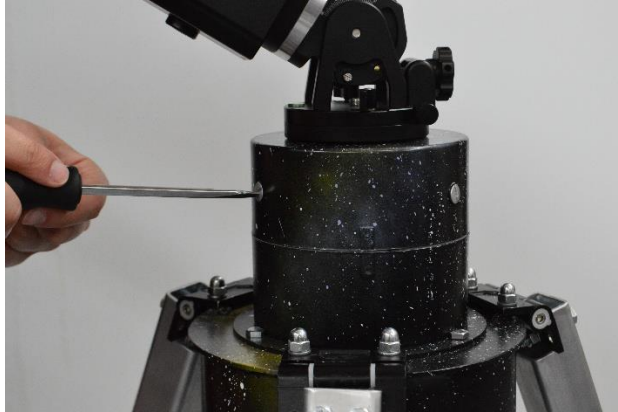

5. Remove the optical assembly (eyepiece, camera, and flip mirror) from the carrying case. Remove the protective caps from both the optical system and the telescope. Insert the optical assembly as far as possible into the telescope coupling and secure it by tightening the set screws with the provided Allen key.



6. Align the telescope's male dovetail with the mount's female dovetail. Once seated, tighten the locking knob on the side of the mount until the telescope is rigid and immobilized.

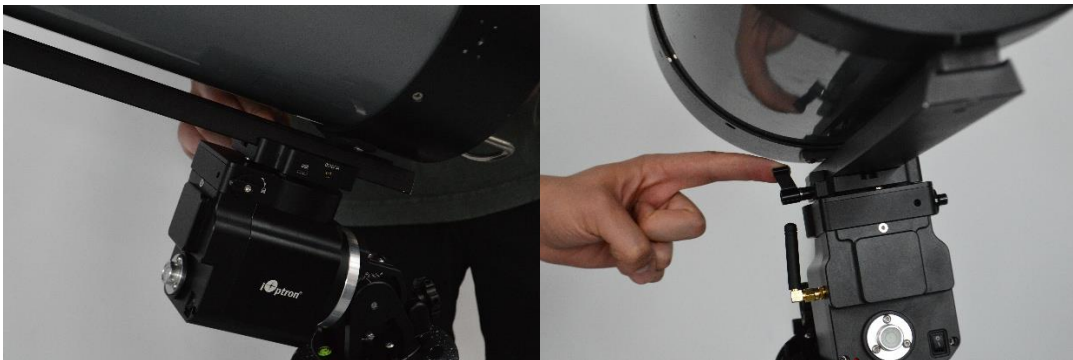

7. Remove the lens cover for the telescope by rotating it counterclockwise.



8. Check that the set screws are still tight so that the optical assembly will not fall out.




9. Connect the USB 3.0 cable from the electrical subsystem to the ZWO camera.
Connect both the power and USB-C cables to the iOptron mount for power and data transfer.



10. Locate the folding keyboard with the touchpad in the top case on the dolly. Unfold it and press any key to power on the computer.



11. Open the command terminal. Navigate to the directory by entering **`cd ASTRA`**.

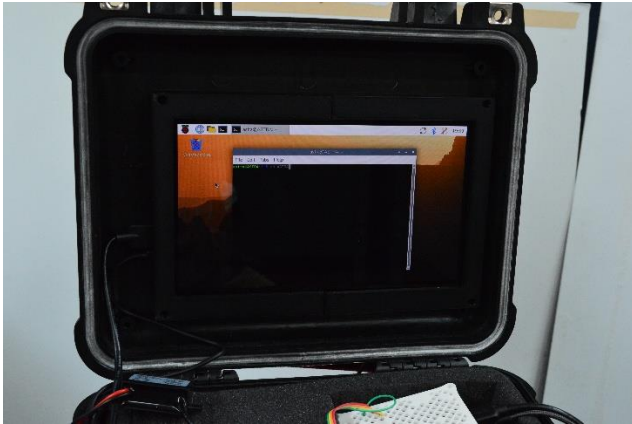

12. Run the initialization script by entering **`bash ./run_astra-linux.sh`**.



13. The ASTRA GUI will load and is ready for operation via the keyboard.

