

RELIANT 2700

UNIVERSAL FRICTION FEEDER®

MODEL OVERVIEW:

SUMMARY: Production mailing operations demand maximum throughput from their ink jet, tabber, and labeler bases. Whatever brand on your shop floor - Kirk Rudy, Cheshire, Buskro, MCS, Profold, or others - with a Reliant 2700 your jobs will run at higher levels of productivity.

APPLICATIONS:

- Ink Jet Bases
- Tabber Bases
- Labelers
- Scanning
- Reinforcing Machines

INCREASE PRODUCTIVITY / MAXIMIZE R.O.I.



CE

THINK AUTOMATION

The impressive flexibility of the Reliant 2700 was not achieved at the expense of performance. Greater throughput is assured with reliable feeding to 144,000 pieces per hour on your vacuum transport base.

Greater stack heights and simple setups further add to job productivity. Tall stack heights of 8.5 x 11 inches and A4-sized sheets are fed with complete ease. Setups and changeovers are easily and quickly accomplished without the use of tools. Maintenance is simple and fast due to its modular design.

STANDARD FEATURES

- Patented Differential Friction Technology™ for reliable product separation.
- Feeds tall stack heights of 8.5 x 11 inches and A4 sized sheets.
- 24-inch (60.96 cm) capacity hopper with one-knob width adjustment.
- No-slip feet allow for fast and easy base mounting.
- Tool-free adjustments for quick setups and changeovers.
- Variable speed control for synchronous operation.
- Operator safety guards over discharge and feed belts.
- External run input interface.

SPECIFICATIONS

Maximum Material Size:	11¾ in. W x 14 in. L (29.85 cm x 35.56 cm)
Minimum Material Size:	3¼ in. W x 2½ in. L (9.53 cm x 6.35 cm)
Optional:	2 in. W x 2½ in. L (5.08 cm x 6.35 cm)
Thickness:	.003 in. to 1 in. (.07 mm to 25.4 mm)
Productivity:	Up to 144,000 an hour (business cards)
Power Input:	115/230vac 50/60Hz 3A
Switches & Controls:	Power On/Off Variable speed control Reset
Construction:	Powder coated cold rolled steel enclosure; aluminum base plate
Run Delay:	Selectable (0-15 seconds; 1.0 second increments)
Overall Dimensions:	20⅞ in. L (53.02 cm) 13⅝ in. W (34.67 cm) 27⅞ in. H (68.90 cm)
Weight:	70 lbs. (31.75 kg)
Warranty:	Two-year limited

INK JET/TABBER BASE FEEDERS

Streamfeeder
®

© Streamfeeder 2002 • 00900405-A 04/02
Specifications and pricing subject to change
without notice

WWW.STREAMFEEDER.COM

STREAMFEEDER LLC

103 OSBORNE ROAD
MINNEAPOLIS, MINNESOTA 55432-3120

TEL: 763.502.0000 • FAX: 763.502.0100
E-MAIL: SALES@STREAMFEEDER.COM


PRICING

NEW
"EASY ORDER"
PRICING


PRODUCT DESCRIPTION	LIST PRICE
Reliant 2700 Continuous Mode (specify 115 or 230vac).....	\$4,995.00
Includes horizon adjust advancing O-ring gate, single S-wedge, grooved gum rubber carriage, one-knob adjustable hopper and external run input (specify voltage).	
Reliant 2700 Bryce Continuous Mode (specify 115 or 230vac)	4,995.00
Includes horizon adjust standard O-ring gate, single S-wedge, grooved gum rubber carriage, one-knob adjustable hopper, emergency stop button, and 3-28VDC external run input with RJ11 connector.	
OPTIONS	ADD
Vacuum assist carriage upgrade	\$685.00
Small product wedge kit (single S, combination, extended narrow)	475.00
Large product wedge kit (double S, low profile, articulating roller)	540.00
Side guide narrowing kit	295.00
Spare parts kit	200.00
Emergency stop assembly (included in Bryce Configuration)	240.00
External run input (choose from 115vac, 230vac, 24vac, 3-28VDC, or dry contact)	included
Adjustable stand.....	495.00
Casters 3-inch (set of 4)	125.00
Vacuum pump (specify 115 or 230vac).....	575.00
PIAB vacuum generator	363.50

DIMENSIONS

Back View

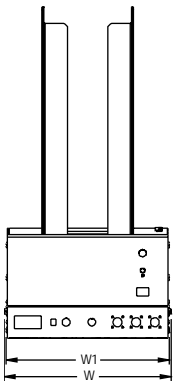


Side View

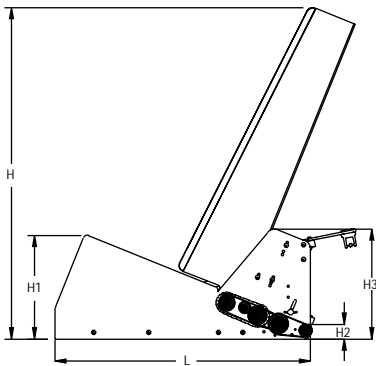

Dimensions

Letter	Inches	Centimeters
L	20 7/8	53.02
H	27 1/8	68.90
H1	8 7/16	21.43
H2	1 13/64	3.06
H3	9 29/32	25.16
W	13 21/32	34.67
W1	13 23/64	33.91
M	5 19/32	14.21
M1	2 1/4	5.72
M2	6 3/32	15.48
M3	3 31/32	10.08

Bottom View

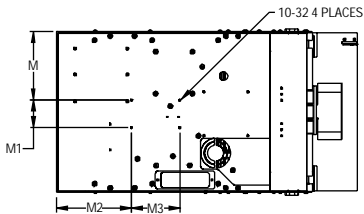

INK JET/TABBER BASE FEEDERS