


KR 215

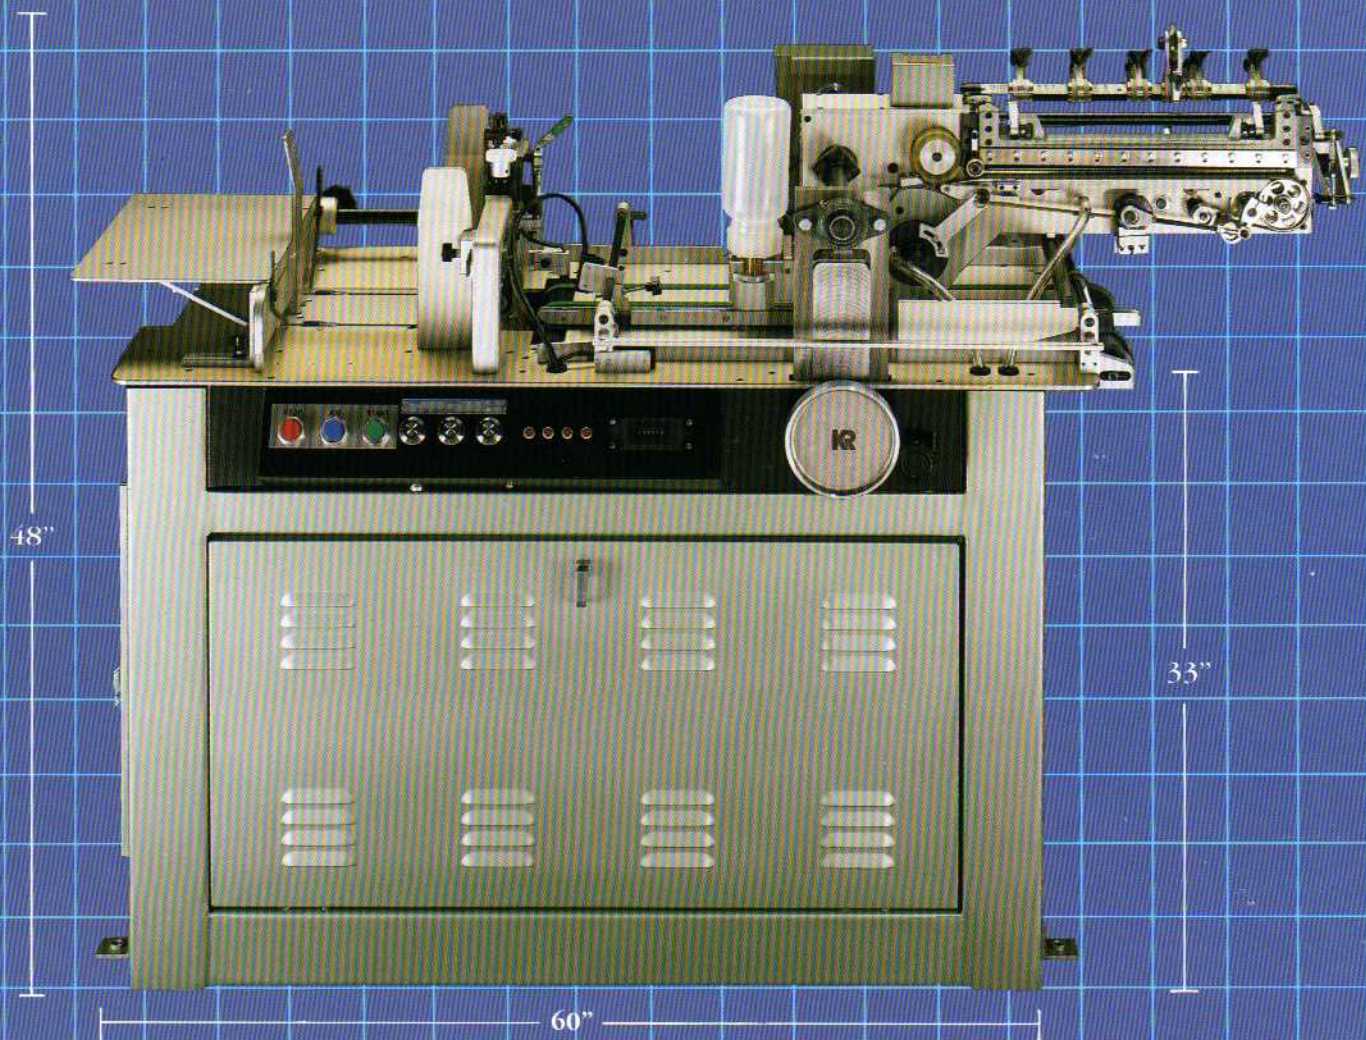

The Only System You May Ever Need — Because You Can Grow With It.

Kirk-Rudy offers what professionals demand:

- Value.
- Quality.
- Durability.
- Performance.
- Extended capabilities.
- Modular systems/multiple single pass operations.
- Compatibility with other popular brands of ink jet, labeling, stacking and inserting equipment.

- Full range of equipment options to include: Labeling equipment, stamp applying equipment, tipping equipment, imprinting equipment, quarter folding equipment, zip/carrier route sorting equipment, counting equipment, stacking equipment.

New equipment sales, parts, and service are available world-wide through the Kirk-Rudy Authorized Dealer Network.



**KIRK-RUDY 215
MAILING SYSTEM**



KIRK-RUDY INCORPORATED

SPECIFICATIONS

Distributed by
MAILERS ENGINEERING
 2441 RIVERSIDE DR.
 LOS ANGELES, CA. 90039
 (213) 383-6245

Length 60"
 Width 34"
 Height 48"
 Main Drive Motor 1 H.P.
 Power Requirements 220 Volts, 30 Amp, 50/60 Hz, 1 Phase

Material Sizes*

Minimum 3x5 inch, single sheet

Maximum 17x17 inch, 5/8 inch thick

*NOTE: Modifications are available to increase thickness limit up to 3 1/2 inches. Other combinations of minimum and maximum limitations are available as special orders.

Conveyors

Length 8', 12**, or 18***
 Motor 1/4 H.P.

*Standard Length

**Other lengths available on request


KR 211

Standard Features

- Equipped to handle lists in a 3, 4, or 5 across format.
- Maximum label length is over 4 1/2 inches and the minimum length is 2 inches.
- Accommodates plain paper as well as pressure-sensitive or piggyback labels.
- Missed document detection system interfaces directly with the KR 215.
- Handles 1 inch high labels as standard. All height labels from 1/2 to 6 inches can be used with the proper accessory kit.

Optional Equipment

- Electronic Label Feed - required for label heights over 2 inches and recommended for pressure-sensitive or piggyback applications.
- Special Label Format Equipment Kits - allows use of a 1, 2, or 6 across label format.
- Special Extra-Height Label Accessory Kits - enables the KR 211 to use label height from 1/2 to 6 inches. (May require the Electronic Label Feed Option).
- Heat Wheel Kits - allows use of paper with heat-activated adhesive coatings. Label heights from 1/2 to 2 inches in either 11" or 22" spacing.
- Townsort - The Electronic Mail Sorting Processor - a microcomputer controlled system that sorts by zip codes or carrier route on pre-coded lists - it can actuate Kickers, speed-up conveyors, or KR stackers as well as most other stackers.

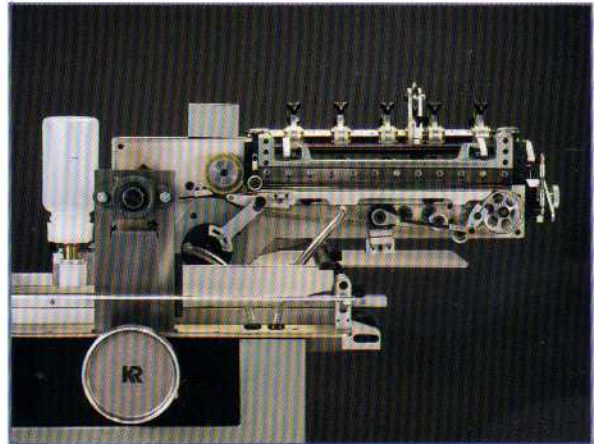

KR 211


KR 215

Standard Features


- Heavy Duty Variable Speed Main Drive Motor.
- Dual Vacuum Pump System.
- Built-in Semi-Automatic Lubrication System.
- Emergency Stop Bar.
- Missed Document Detection System.
- Quick Jam Release for Feeder.
- Resettable Counter.
- Choice of either Standard Width or Extra-Wide Shuttle Feed Table.
- Fully Adjustable Hopper.
- Needle Block Feed Mechanisms.
- Dual Spacing Ranges - allows the KR 215 to be operated with either 11 or 22 inch spacing that provides machine cycle speeds in excess of 15,000 and 26,000 pieces per hour respectively.
- Newspaper Equipment Package is available at the factory on request on a "no charge" basis. This group includes a second tabletop skid bar, a fourth tabletop belt, and Extra-Wide Jogging Table, and the Extra-Wide Shuttle Feed Table.

Optional Equipment

- Quarterfolder Wiring Harness.
- KR 219 Label Base - this unit provides you with a second head mounting station. The unit is driven by your KR 215 Base.
- KR 516 Quarterfolder - maximum performance belt folder that runs inline with your KR215/219 Combination or KR 215 Base.
- KR 240 Inline Imprinter - may be used with the KR 215 or the KR 215/516 Combination.
- Full range of KR Heads to perform many tasks.
 KR 211 Multiple-Width Address Labeling Head.
 KR 203 Tip-On Label Head (also for Credit Cards).
 KR 221-223 Stamp Applying Head.
 KR 221-227 One-Up Address Label Head.
 KR 225 Code Imprinter Head.
- Custom paint in colors of your choice.
- Predetermined Counter Installed with Kicker or Speed-Up Conveyor.
- Conversion Kits to allow operation of other label heads not of our manufacture.
- Conveyor lengths other than standard (6, 8, and 18 foot lengths are standard).
- Customer originated modifications on request.
- Ink Jet Configuration Package.
- Extra-Quiet Vacuum Pump Package with sound deadening insulation.

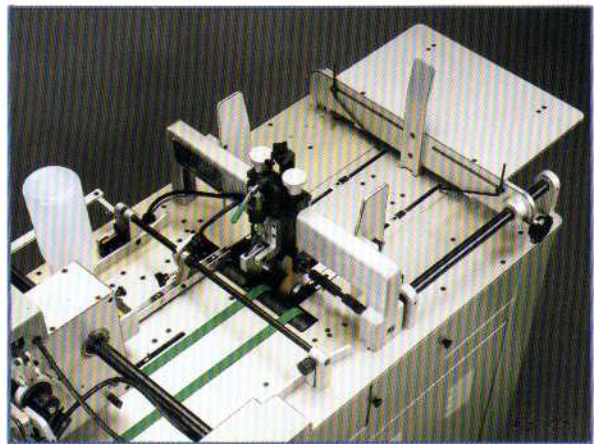

KR 215

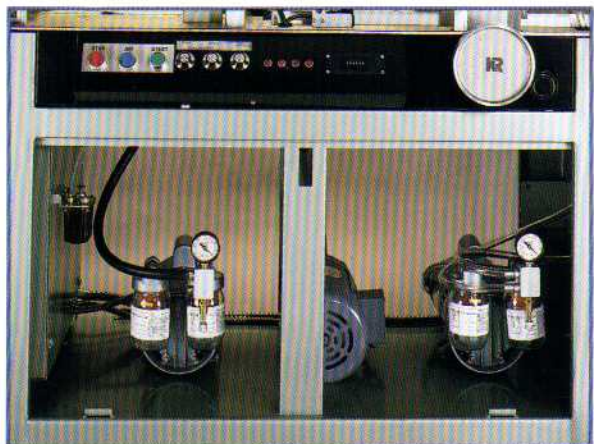

KR 215