

ROMP-4



Automatic Strapping System

STANDARD FEATURES

ROMP-4

Fast, efficient strapping with the reliable performance expected from EAM-Mosca equipment. The New ROMP4 strapping machine features automatic strap feed to simplify coil loading and eliminate product flow interruptions.

One-piece strap track is formed from special, low-friction UHMWPE material noted for its toughness and long wearing characteristics. Unique design allows for smooth, high-speed, jamfree strap feeding. Actuated by a positive four-point cam mechanism, this unique design allows for smooth, high-speed, jam-free feeding of low-cost polypropylene strapping, available in a number of widths and break-strengths. The ROMP4 positively moves strap through the track, virtually eliminating mis-feeds.

Strap door for coil change opens on machine right or machine front. Coil pulls out on sliding rack for ease and convenience when replacing coil. Work surface is hinged for easy cleaning of strap sealing area.

System features a state of the art electronic control system with safety interlocks for increased operator protection from injury. If the machine is accidently cycled without a package, it automatically dispenses a strap loop and ejects it, then automatically re-threads for the next bundle, eliminating unnecessary downtime.

Uses lowest cost strapping available in widths of 5mm to 1/2". Simple, external controls adjust strap tension to meet varying package demands. A selector switch for 'soft' strapping of extremely delicate bundles is a standard feature.

The ROMP4 heat-weld sealing system for high-strength strap joints uses electronic temperature control for consistent, reliable seals. Reliable seals mean less product damage and less waste.

System features four casters, two locking for easy movement and positioning. Integrally mounted foot-switch, strap dispenser and internal strap accumulator requires less space.

Straps up to 50 packages per minute via foot-pedal or optional electronic photo-eye controls. Actual production speeds are dependant upon package size, track size and operator speed.

EAM-Mosca offers knowledgeable technical support, readily available from our network of service technicians, strategically located throughout the country. We provide system installation and offer in-plant training for your technical and maintenance staff. For additional information please visit our web site at www.eammosca.com or call us at numbers listed below.

TECHNICAL DATA

PRODUCTION RATE: Up to 50 straps per minute depending upon package size and track dimensions

STRAPPING: 5mm, 6mm, 8mm, 9mm, and 1/2" Machine

Grade Polypropylene

TRACK SIZES: FROM 15.7" x 11.8" to 65" x 19.7" (SEE CHART) Custom track sizes available. Call for info.

ELECTRICAL REQUIREMENTS: 110V, 60 Hz, .5 KVA

TABLE HEIGHT: 31.5" +7- 2"

STRAP TENSION: DC Motor-Controlled, Infinitely Adjustable up to 80 Pounds

STRAP SEAL: Heat-Seal, Electronic Temperature Controlled


MACHINE COLOR: Mosca Blue RAL 5010

MACHINE SHIPPING WEIGHT: Approximately 300 - 400 Lbs.

depending upon model

OPTION: Pneumatic Press

DIM	ROMP2-50/4		ROMP2-60/5		ROMP2-80/4		ROMP2-80/6		ROMP2-100/8		ROMP2-125/5		ROMP2-165/5	
	Inches	mm	Inches	mm	inches	mm	inches	mm	inchès	mm	Inches	mm	Inches	mm
Α	19.7	500	23.6	600	31.5	800	31.5	800	39.4	1000	49.2	1250	65	1650
В	15.7	400	19.7	500	15.7	400	23.6	600	31.5	800	19.7	500	19.7	500
Cycles Minute	50		48		46		44		40		40		36	

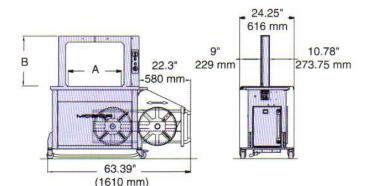

I (800) 456-3420

EAM-Mosca Corporation 675 Jaycee Drive West Hazleton, PA 18201 I (800) 456-3420 I (570) 459-3426 I (570) 455-2442 FAX

www.eammosca.com

info@eammosca.com

In Canada, call or write:

EAM-Mosca (Canada) Ltd.

170 William Smith Drive Whitby, Ontario L1N9N3 Canada I (905) 665-8225 I (905) 665-8188 FAX

EAMOSCA