



FP7-600716

Whole-Body Compliant Dynamical Contacts in Cognitive Humanoids

D5.3
Validation scenario 3:
balancing on compliant environmental
contacts

Editor(s)	Daniele Pucci
Responsible Partner	IIT
Affiliations	¹ IIT
Status-Version:	Draft-1.0
Date:	Feb. 28, 2016
EC Distribution:	Consortium
Project Number:	600716
Project Title:	Whole-Body Compliant Dynamical Contacts in Cognitive Humanoids

Title of Deliverable: balancing on compliant environmental contacts	Validation scenario 3:
Date of delivery to the EC:	28/2/2016

Workpackage responsible for the Deliverable	deliv WP5
Editor(s):	Daniele Pucci
Contributor(s):	Daniele Pucci, Francesco Romano, Jorhabib Eljaik, Silvio Traversaro, Serena Ivaldi, Vincent Padois, Francesco Nori
Reviewer(s):	
Approved by:	All Partners
Abstract	This deliverable discusses the technical details and choices for the implementation of the year-3 validation scenario of the CoDyCo project. The validation scenario aims at verifying the control performances in the case the humanoid robot iCub must balance by means of compliant or dynamical contacts. With <i>dynamical contact</i> we mean that the robot's link in contact with the environment is not fixed with respect to an inertial frame, and the wrench applied to it is not due to a spring-damper system. First, we detail the control algorithm for dealing with a soft carpet underneath the robot's feet. This case study exemplifies the case of a robot interacting with a compliant environment. Then, we present the control algorithm to allow the robot balancing on a semi-cylindrical seesaw. This case study exemplifies the problem of a humanoid robot balancing by means of dynamical contacts. In fact, the robot's feet do not have a constant pose with respect to the inertial frame in this case. Contact and trajectory planning are not part of the scenario.
Keyword List:	Multiple, compliant, dynamical, contacts, control, stability, tracking, forces, torques.

Document Revision History

Version	Date	Description	Author
First draft	19 Feb 2016	In this version we simply write down a few considerations on the third year validation scenario as discussed after the mid-year CoDyCo meeting in Birmingham.	Daniele Pucci

1	Introduction	4
2	Background	5
2.1	Notation	5
2.2	Robot equations of motion	5
2.3	A simple model for a compliant carpet	7
2.4	The equation of motion of the seesaw	9
2.5	The controller for the first and second year validation scenario	10
3	Controllers	12
3.1	Controller for balancing on the soft terrain	12
3.2	Controller for balancing on the seesaw	13
4	Estimation algorithms	13
4.1	Estimation of the floating base	13
4.2	Estimation of the floor compliance	13

1 Introduction

Differently from the first and second year validation scenarios, the third year CoDyCo scenario consists in adding compliance and dynamicity of the robot contacts while the humanoid attempts at balancing. This kind of situations have not received much attention from the control community, and the solutions presented in this document are original in several aspects.

As in the previous validation scenarios, the control objective is the regulation of the robot momentum. The rate-of-change of this momentum equals the summation of all external wrenches applied to the system, and controlling the external wrenches to stabilize the robot's momentum is a known control strategy for humanoids when balancing. One of the main difficulties when dealing with compliant and dynamical contacts in this context comes from the fact that the external wrenches may not be instantaneously related to the robot's torques, i.e. the input to the system. This is the case, for instance, of a humanoid standing on two springs, which exert forces on the robot's feet that depend on the relative compressions only.

There may be some particular soft terrains, however, that exert forces and torques not only depending on the relative compressions, but also on the robot's joint torques. In these cases, the soft terrain is subject to some rigid constraints that may allow the control of the robot's momentum through the external forces, which thus depend on the joint torques. This is the case of a thin, highly damped carpet, which can be modeled, in the first approximation, as a continuum of vertical springs. Each of these springs is assumed to compress vertically only, and the other degrees of freedom are rigidly constrained, thus creating the aforementioned relation between external forces and joint torques [?]. The first experimental demonstration during the review meeting consists of showing the humanoid robot iCub while it balances on a soft carpet of the above kind.

We then go one step further and present control algorithms to deal with *dynamical* contacts. The application scenario of the controller consists of the humanoid robot iCub balancing on a semi-cylindrical seesaw. In this case, the contacts between the robot and its environment are subject to the seesaw dynamics, and the control of the robot is particularly challenging.

The iCub will be torque controlled and the controller assumes that desired torques are exactly executed by a lower level torque control. Dynamics will be computed with a custom library, iDynTree¹, built on top of KDL².

The deliverable is organized as follows. Section ?? gives an high level presentation of the validation scenario to be presented at the second year review meeting. Section ?? discusses the numerical technique (TSID) used to implement the validation scenario as a prioritization of concurrent tasks. Section ?? discusses the set of control tasks that will be implemented in order to perform the validation scenario. Their sequencing in the form of a finite state machine is discussed in Section ?? and issues related to task switching discussed in Section ??.

¹http://wiki.icub.org/codyco/dox/html/group__iDynTree.html

²<http://www.orocos.org/kdl>

2 Background

2.1 Notation

Throughout the paper we will use the following definitions:

- \mathcal{I} denotes an inertial frame, with its z axis pointing against the gravity. We denote with g the gravitational constant.
- $e_i \in \mathbb{R}^m$ is the canonical vector, consisting of all zeros but the i -th component which is one.
- Given two orientation frames A and B , and vectors of coordinates expressed in these orientation frames, i.e. ${}^A p$ and ${}^B p$, respectively, the rotation matrix ${}^A R_B$ is such that ${}^A p = {}^A R_B {}^B p$.
- $1_n \in \mathbb{R}^{n \times n}$ is the identity matrix of size n ; $0_{m \times n} \in \mathbb{R}^{m \times n}$ is the zero matrix of size $m \times n$ and $0_n = 0_{n \times 1}$.
- We denote with $S(x) \in \mathbb{R}^{3 \times 3}$ the skew-symmetric matrix such that $S(x)y = x \times y$, where \times denotes the cross product operator in \mathbb{R}^3 .

2.2 Robot equations of motion

We assume that the robot is composed of $n + 1$ rigid bodies – called links – connected by n joints with one degree of freedom each. In addition, we also assume that the multi-body system is *free floating*, i.e. none of the links has an *a priori* constant pose with respect to the the inertial frame. This implies that the multi-body system possesses $n + 6$ degrees of freedom. The configuration space of the multi-body system can then be characterized by the *position* and the *orientation* of a frame attached to a robot's link – called *base frame* \mathcal{B} – and the joint configurations. More precisely, the robot configuration space is defined by

$$\mathbb{Q} = \mathbb{R}^3 \times SO(3) \times \mathbb{R}^n.$$

An element of the set \mathbb{Q} is then a triplet

$$q = ({}^{\mathcal{I}} p_{\mathcal{B}}, {}^{\mathcal{I}} R_{\mathcal{B}}, q_j),$$

where $({}^{\mathcal{I}} p_{\mathcal{B}}, {}^{\mathcal{I}} R_{\mathcal{B}})$ denotes the origin and orientation of the *base frame* expressed in the inertial frame, and q_j denotes the *joint angles*. It is possible to define an operation associated with the set \mathbb{Q} such that this set is a group. More precisely, given two elements q and ρ of the configuration space, the set \mathbb{Q} is a group under the following operation:

$$q \cdot \rho = (p_q + p_\rho, R_q R_\rho, q_j + \rho_j). \quad (1)$$

Being the direct product of Lie groups, the set \mathbb{Q} is itself a Lie group. The *velocity* of the multi-body system can then be characterized by the *algebra* \mathbb{V} of \mathbb{Q} defined by: $\mathbb{V} = \mathbb{R}^3 \times \mathbb{R}^3 \times \mathbb{R}^n$. An element of \mathbb{V} is then a triplet

$$\nu = (\mathcal{I}\dot{p}_B, \mathcal{I}\omega_B, \dot{q}_j),$$

where $\mathcal{I}\omega_B$ is the angular velocity of the base frame expressed w.r.t. the inertial frame, i.e. $\mathcal{I}\dot{R}_B = S(\mathcal{I}\omega_B)\mathcal{I}R_B$.

Although the above digression on the robot configuration space may sound pedantic and marginal, let us observe that the choice of the group operation in (1) implies that an element $\nu \in \mathbb{V}$ is composed of \dot{p} , i.e. the time derivative of the origin of the floating base frame. Other choices for the group operation would imply a different algebra and, consequently, a different representation of the system's *velocity*.

We also assume that the robot is interacting with the environment through n_c distinct contacts. Applying the Euler-Poincaré formalism [1, Ch. 13.5] to the multi-body system yields the following equations of motion:

$$M(q)\dot{\nu} + C(q, \nu)\nu + G(q) = B\tau + J^\top(q)f \quad (1a)$$

$$J^\top(q)f := \sum_{k=1}^{n_c} J_{C_k}^\top f_k \quad (1b)$$

where $M \in \mathbb{R}^{n+6 \times n+6}$ is the mass matrix, $C \in \mathbb{R}^{n+6 \times n+6}$ is the Coriolis matrix, $G \in \mathbb{R}^{n+6}$ is the gravity term, $B = (0_{n \times 6}, 1_n)^\top$ is a selector matrix, τ are the internal actuation torques, and f_k denotes an external wrench applied by the environment on the link of the k -th contact. We assume that the application point of the external wrench is associated with a frame \mathcal{C}_k , which is attached to the robot's link where the wrench acts on and has its z axis pointing as the normal of the contact plane. Then, the external wrench f_k is expressed in a frame whose orientation coincides with that of the inertial frame \mathcal{I} , but whose origin is the origin of \mathcal{C}_k , i.e. the application point of the external wrench f_k . The Jacobian $J_k = J_k(q)$ is the map between the robot's velocity ν and the linear and angular velocity $\mathcal{I}v_{C_k} := (\mathcal{I}\dot{p}_{C_k}, \mathcal{I}\omega_{C_k})$ of the frame \mathcal{C}_k , i.e.

$$\mathcal{I}v_{C_k} = J_{C_k}(q)\nu. \quad (2)$$

The Jacobian has the following structure.

$$J_{C_k}(q) = \begin{bmatrix} J_{C_k}^b(q) & J_{C_k}^j(q) \end{bmatrix} \in \mathbb{R}^{6 \times n+6}, \quad (2a)$$

$$J_{C_k}^b(q) = \begin{bmatrix} 1_3 & -S(\mathcal{I}p_{C_k} - \mathcal{I}p_B) \\ 0_{3 \times 3} & 1_3 \end{bmatrix} \in \mathbb{R}^{6 \times 6}. \quad (2b)$$

Lastly, we assume that rigid contacts may occur between the robot and the environment. The rigid contacts are assumed to be due to the rubbing of two flat surfaces belonging to the robot and to the environment, respectively. The constraint associated with the rigid contact is modeled as a kinematic constraint that forbids any motion of the frame \mathcal{C}_k , i.e. $J_{C_k}(q)\nu = 0$.

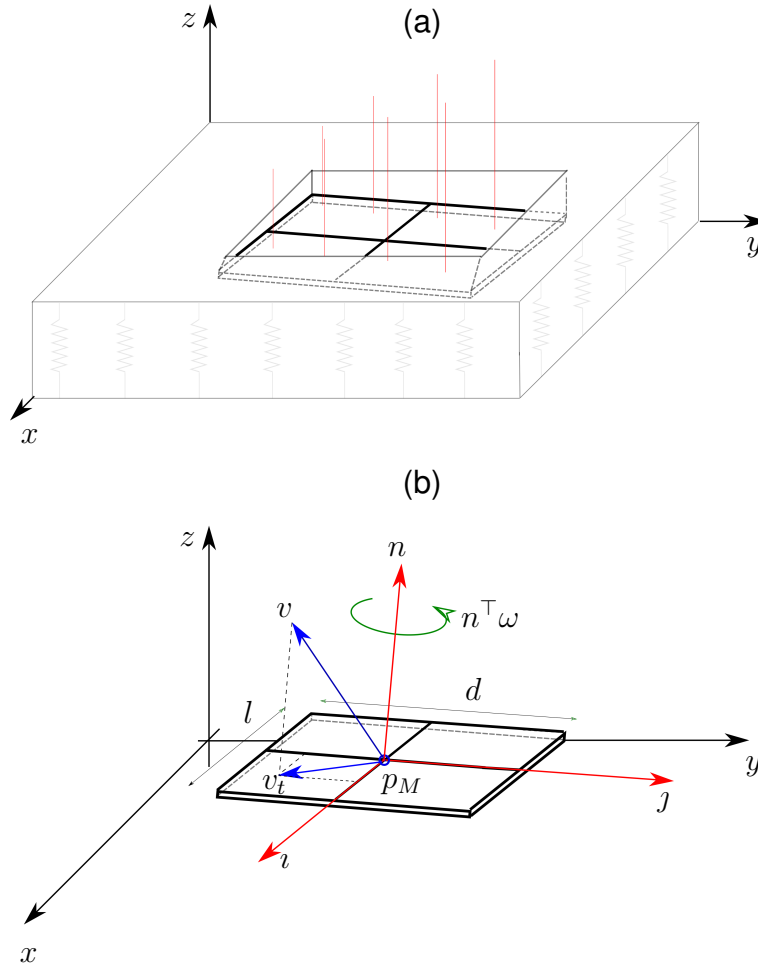


Figure 1: A compliant carpet subject to a non-uniform force distribution

2.3 A simple model for a compliant carpet

As seen in the deliverable [?], the model of a compliant carpet can be developed under the following assumption.

Assumption 1. *We assume the following holds.*

1. *The carpet characteristics are isotropic.*
2. *The soft carpet can be approximated as a continuum of springs. In addition, each infinitesimal spring can exert only a vertical force.*

As a consequence of the above assumption, the force and torque exerted from a compliant floor onto a generic contact surface is given by:

$$F = e_3 \int \int_D f(z) dx dy, \quad (3a)$$

$$M = \int \int_D f(z) S(p - \bar{p}) e_3 dx dy, \quad (3b)$$

with $f(z)$ the vertical force distribution per surface, $p = (x \ y \ z)^\top$ a point of the contact surface, $\bar{p} = (\bar{x} \ \bar{y} \ \bar{z})^\top$ the point w.r.t. which the torque is expressed, and $D \subset \mathbb{R}^2$ a proper integration domain associated with the contact surface configuration.

We have also seen that in the case of a rectangular, flat contact surface – see Figure 1 – the closed form expression of the force-torque due to a generic surface compression can be evaluated.

Lemma 1. *Assume that Assumption 1 holds, and that the force distribution $f(\cdot)$ associated with the compliant carpet is linear with respect to the height, i.e.*

$$f(z) = k(h - z). \quad (4)$$

Let a flat, rectangular surface, of length l and width d , be in full-contact with the compliant carpet. Then, the force-torque acting on the rectangular surface at the equilibrium configuration is given by:

$$F = kld|n^\top e_3| (h - z_M) e_3 \quad (5a)$$

$$M = S(p_M - \bar{p})F + \frac{kld}{12}|n^\top e_3|S(e_3)\Lambda(i, j)e_3 \quad (5b)$$

with

$$\Lambda = d^2 jj^\top + l^2 ii^\top, \quad (6)$$

p_M the central point of the rectangular surface, and i and j two unit, perpendicular vectors parallel to the rectangle's borders associated with the length and the width, respectively.

In the context of this report, the flat, rectangular plate represents the robot's sole. Let us also recall that the constraints due to friction and carpet damping are given by

$$\mathcal{I}_{v_c}^\top i = 0 \quad (7a)$$

$$\mathcal{I}_{v_c}^\top j = 0 \quad (7b)$$

$$\mathcal{I}_{v_c}^\top e_3 = 0 \quad (7c)$$

$$\mathcal{I}_{\omega_c}^\top n = 0 \quad (7d)$$

where $\mathcal{I}_{v_c} \in \mathbb{R}^3$ denotes the velocity of the point p_M , and $\mathcal{I}_{\omega_c} \in \mathbb{R}^3$ the angular velocity of the flat plate, both expressed with respect to the inertial frame. The above equations point out that the flat plate can only rotate only about the axes i and j . Note that the constraints (7) can be compactly written as:

$$H(i, j, n)\mathcal{I}_{v_c} = 0, \quad (8)$$

where

$$H(i, j, n) := \begin{pmatrix} i^\top & 0_{1 \times 3} \\ j^\top & 0_{1 \times 3} \\ e_3^\top & 0_{1 \times 3} \\ 0_{1 \times 3} & n^\top \end{pmatrix} \quad (9a)$$

$$\mathbf{v}_c := \begin{pmatrix} \mathcal{I}_{v_c} \\ \mathcal{I}_{\omega_c} \end{pmatrix} \quad (9b)$$

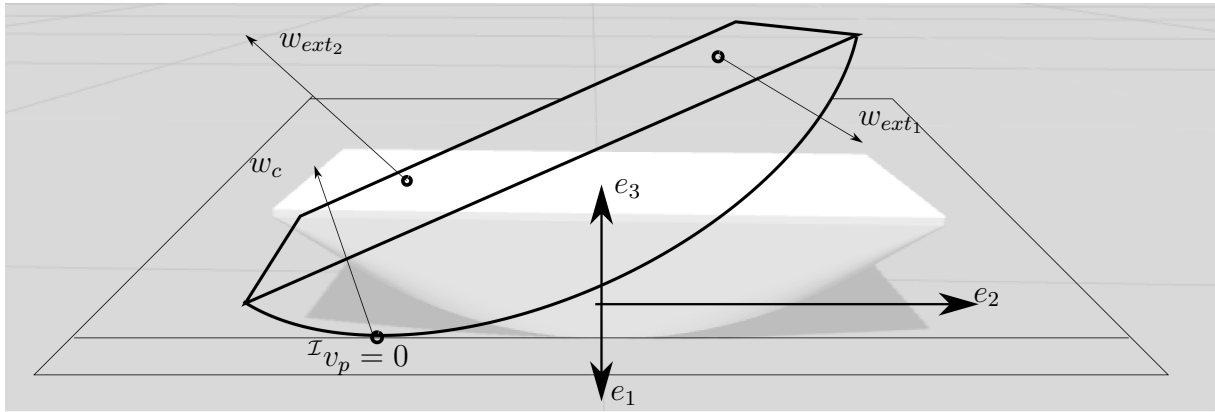


Figure 2: The semi-cylindrical seesaw

2.4 The equation of motion of the seesaw

The equation of motion of the seesaw are derived by considering it as a rigid body subject to the rolling constraint. Let m_s and I_s denote the mass and the inertia matrix of the seesaw, and $\mathcal{I}v_s$ and $\mathcal{I}\omega_s$ the linear velocity of its center of mass and its angular velocity, respectively. Then, the momentum of the seesaw $H_s \in \mathbb{R}^6$ is defined by

$$H_s := \begin{pmatrix} m_s \mathcal{I}v_s \\ I_s \mathcal{I}\omega_s \end{pmatrix}, \quad (10)$$

and the equation of motion= are given by

$$\dot{H}_s = \sum_i w_{ext_i} \quad (11)$$

subject to the following constraints

$$\mathcal{I}v_p = 0. \quad (12a)$$

$$\mathcal{I}\omega_s^\top e_2 = 0 \quad (12b)$$

$$\mathcal{I}\omega_s^\top e_3 = 0 \quad (12c)$$

with w_{ext} the external wrenches applied to the seesaw. The kinematic constraints (12) express the following facts:

- The seesaw cannot rotate about the axes e_2 and e_3 of the inertial frame.
- The contact point between the seesaw and the floor possesses null velocity. This, along with the constraints on the seesaw angular velocity, ensures that all points of the contact line between the seesaw and the floor have zero velocity.

The satisfaction of the above constraints is ensured as long as the contact wrench w_c (see Figure 2) belong to the associated friction cones.

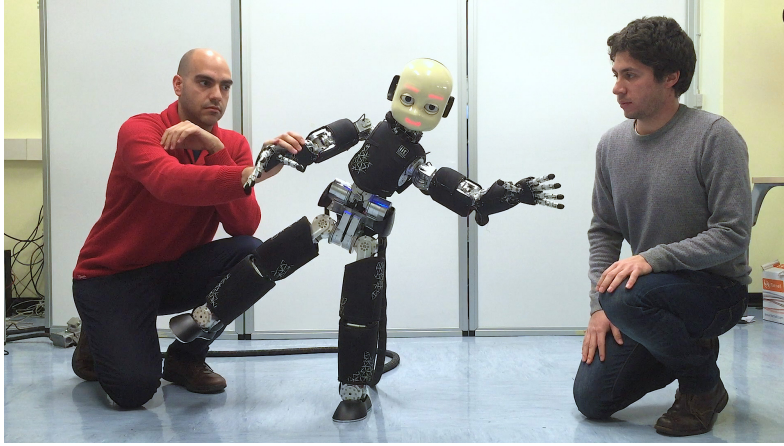


Figure 3: A screen-shot of the one-foot balancing demo

2.5 The controller for the first and second year validation scenario

The control objective for achieving balancing on either one foot or two feet has been the following ones since the beginning of the project:

1. Stabilization of the robot's momentum (expressed at the center-of-mass and with the inertial frame orientation), which is defined by

$$H = \sum H_i = \begin{pmatrix} m\dot{x} \\ H_\omega \end{pmatrix},$$

with H_i the momentum of each link composing the multi-body system, m the total mass of the robot, $x \in \mathbb{R}^3$ the position of the robot center-of-mass, and H_ω the angular momentum of the multi-body system. Let us recall that contrary to the case of a single rigid body, the possibility of expressing the angular momentum H_ω in terms of a proper angular velocity is still open. For this reason, we won't refer to a *robot angular velocity* when stabilizing the humanoid angular momentum.

The control of the robot momentum is achieved assuming the contact wrenches as a virtual control input in the dynamics of H . For instance, assuming that the robot is balancing on two feet, two external wrenches $f_L \in \mathbb{R}^6$ and $f_R \in \mathbb{R}^6$ act on the left and right foot, respectively. Then, one has

$$\dot{H} = mg + {}^cX_L f_L + {}^cX_R f_R = mg + \begin{pmatrix} {}^cX_L & {}^cX_R \end{pmatrix} f, \quad (13)$$

where ${}^cX_L, {}^cX_R \in \mathbb{R}^{6 \times 6}$ are two proper projection matrices, and $f := (f_L^\top, f_R^\top)^\top$. Since f is assumed to be a control input, one can choose it so that $\dot{H} = \dot{H}^*$, where \dot{H}^* ensures that $x \rightarrow x_d$ and $H_\omega \rightarrow 0$. Clearly, at this level, one is left with a six-dimensional redundancy of the control input. This redundancy is exploited to minimize joint torques.

2. In the null space of the above task, we want the robot to assume a desired joint configuration, while being as compliant as possible. This is achieved by means of a postural task at the joint torque level, which exploits a proportional-derivative plus gravity compensation control strategy for stabilizing a desired joint reference.

In the language of the *Optimization Theory*, the above control objectives can be formulated as follows.

$$f^* = \underset{f_d}{\operatorname{argmin}} |\tau^*(f_d)| \quad (14a)$$

s.t.

$$C f_d < b \quad (14b)$$

$$\dot{H}(f_d) = \dot{H}^* \quad (14c)$$

$$\tau^*(f_d) = \underset{\tau}{\operatorname{argmin}} |\tau(f_d) - \tau_0(f_d)| \quad (15)$$

s.t.

$$\dot{J}(q, \nu)\nu + J(q)\dot{\nu} = 0 \quad (15a)$$

$$\dot{\nu} = M^{-1}(S\tau + J^\top(q)f - h(q, \nu)) \quad (15b)$$

$$f = f_d \quad (15c)$$

$$\tau_0 = \bar{h} - \bar{J}_j^\top f - K_p(q_j - q_j^{des}) - K_d(\dot{q}_j - \dot{q}_j^{des}) \quad (15d)$$

For the sake of completeness, in the above optimization problem one has

$$\dot{H}^* = \begin{pmatrix} m(\ddot{x}_d - k_p(x - x_d) - k_d(\dot{x} - \dot{x}_d)) \\ -k_\omega H_\omega \end{pmatrix} \quad (16a)$$

$$\bar{h} := h_j - M_{bj}^\top M_b^{-1} h_b \quad (16b)$$

$$\bar{h} := \begin{pmatrix} h_b \\ h_j \end{pmatrix} = C(q, \nu)\nu + G(q), \quad h_b \in \mathbb{R}^6 \quad h_j \in \mathbb{R}^n \quad (16c)$$

$$\bar{J} := J_j - J_b^\top M_b^{-1} M_{bj} \quad (16d)$$

$$M = \begin{pmatrix} M_b & M_{bj} \\ M_{bj}^\top & M_j \end{pmatrix} \quad M_b \in \mathbb{R}^{6 \times 6} \quad M_{bj} \in \mathbb{R}^{6 \times n} \quad M_b \in \mathbb{R}^{n \times n} \quad (16e)$$

Note that the additional constraint (14b) ensures that the desired contact wrenches f_d belong to the associated friction cones. Once the optimum f^* has been determined, the input torques τ are obtained by re-using the expression (15), i.e.

$$\tau = \tau^*(f^*) \quad (17)$$

Now, by direct calculations one can verify that the solution to the problem (15) is an affine function versus the desired wrenches f_d , i.e. $\tau^* = A(q, \nu)f_d + b(q, \nu)$, where $A \in \mathbb{R}^{n \times 12}$ and $b \in \mathbb{R}^n$ two proper matrices. This leads to the following simplification of the optimization problem

$$f^* = \underset{f_d}{\operatorname{argmin}} |\tau^*(f_d)| \quad (18a)$$

s.t.

$$C f_d < b \quad (18b)$$

$$\dot{H}(f_d) = \dot{H}^* \quad (18c)$$

$$\tau^*(f_d) = A(q, \nu)f_d + b(q, \nu) \quad (18d)$$

The above control algorithm has run at both review meetings of the CoDyCo project.

3 Controllers

This section discusses the modification of the control algorithm (14) for dealing with compliant and dynamical contacts.

3.1 Controller for balancing on the soft terrain

Assume that the robot is balancing, on two feet, on the compliant carpet described in Section 2.3. In view of Eq. (9), the constraints acting on the robot can be compactly written as:

$$\bar{H}(\iota, j, n) \mathcal{I} v_f = 0, \quad (19)$$

with

$$\bar{H} = \begin{pmatrix} \bar{H}_L(\iota_L, j_L, n_L) & 0_{4 \times 6} \\ 0_{4 \times 6} & \bar{H}_R(\iota_R, j_R, n_R) \end{pmatrix} \quad (20a)$$

$$v_f = \begin{pmatrix} v_L \\ v_R \end{pmatrix} \quad (20b)$$

and v_L and v_R the linear and angular velocity of the central point of the robot's feet, respectively. Now, the feet velocity $\mathcal{I} v_f$ can be expressed in terms of the robot velocity ν through its Jacobian, i.e.

$$\mathcal{I} v_f = J(q) \nu.$$

By substituting the above equation into (19), one obtains

$$\bar{J}(q) \nu = 0 \quad (21a)$$

$$\dot{\bar{J}}(q) \nu + \bar{J}(q) \dot{\nu} = 0 \quad (21b)$$

where

$$\bar{J}(q) := \bar{H}(\iota, j, n) J(q). \quad (22)$$

Hence, the constraint equations when the robot stands on a compliant carpet have the same form of those when standing on rigid constraints (compare Eqs. (21b) and (15a)). What does change between these two situations is the number of rigid constraints acting on the system. In fact, in the case the robot stands on rigid contacts, one has 12 kinematic constraints, while when the humanoid balances on the soft carpet described in Section 2.3, one has eight rigid constraints acting on the system. These eight rigid constraints generate eight contact *forces* $f_{rigid} \in \mathbb{R}^8$. The contact forces depend on the torque input τ via the dynamic equation

$$M(q) \dot{\nu} + C(q, \nu) \nu + G(q) = B\tau + J^\top(q) f_{rigid} + J^\top(q) f_{ext} \quad (22a)$$

and the constraint equation (21b). Recall also that the control objective is the asymptotic stabilization of the robot's momentum H , the rate-of-change of which equals the summation of all external wrenches acting on the system. In view of (13), one has

$$\dot{H} = mg + {}^c X_L f_L + {}^c X_R f_R = mg + ({}^c X_L \quad {}^c X_R) f, \quad (23)$$

where now f is composed of two components: the wrench due to the compliant carpet, and the wrench necessary for the satisfaction of the constraints

3.2 Controller for balancing on the seesaw

4 Estimation algorithms

4.1 Estimation of the floating base

4.2 Estimation of the floor compliance

References

- [1] Marsden, J. E. and Ratiu, T. S. (2010). *Introduction to Mechanics and Symmetry: A Basic Exposition of Classical Mechanical Systems*. Springer Publishing Company, Incorporated.