

CA-201 Turret plate

NOTES


1. Hole sizes are the printed sizes from the PETG tolerance table (backend/cad/model.py TOL). Print CA-900 first and adjust TOL if a fit is off.
2. Screws thread straight into the printed pilots (HF kit #67675, no nuts).
3. Datum = the part's bounding-box corner (min X, Y, Z), lower left of the front and top views. Hole centres: (X, Y) for Z holes, (X, Z) for Y holes, (Y, Z) for X holes. ×k = k holes stacked along the axis; +n = n more positions (see the STEP file).
4. Shown in its assembly orientation; the STEP file defines all other geometry.

TOP VIEW

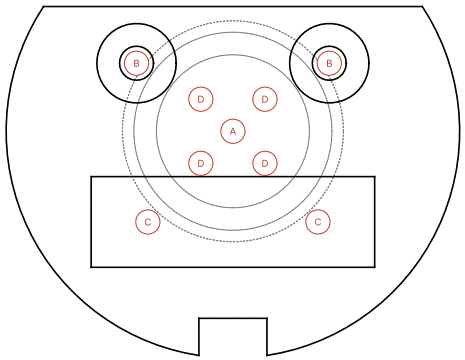


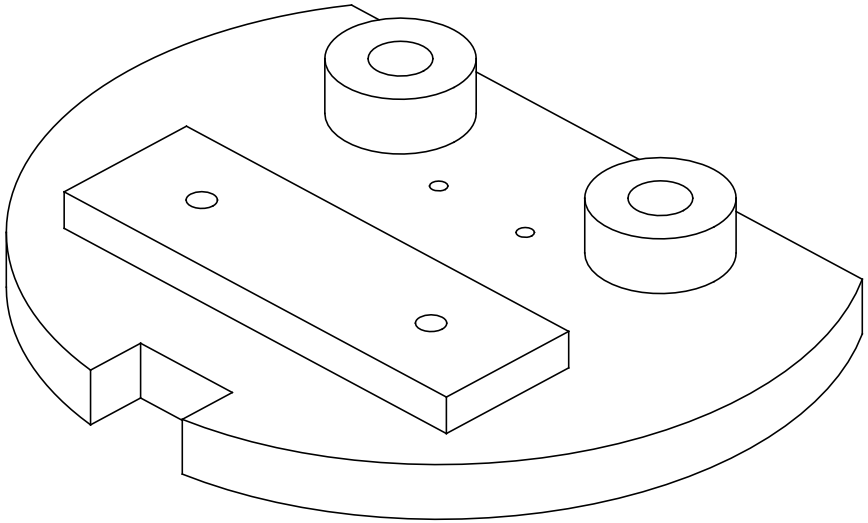

ISOMETRIC (not to scale)

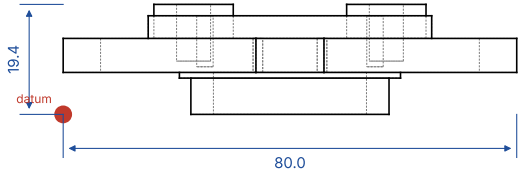

FRONT VIEW

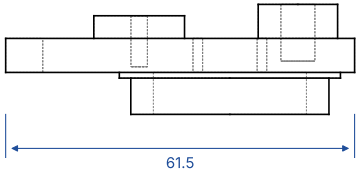

RIGHT VIEW

HOLE TABLE (letters mark hole centres on the view along that axis)

	Ø (mm)	×	axis	depth	centres from datum (mm)	fit / feature
A	27.00	1	Z	7.4	(40.0, 39.5)	recess for the Ø25 MG996R horn
B	6.00	2	Z	10.0	(23.0, 51.5); (57.0, 51.5)	6 mm rod press fit
C	2.90	2	Z	9.0	(25.0, 23.5); (55.0, 23.5)	#6-32 pilot (self-threading)
D	1.70	4	Z	6.0	(34.3, 33.9); (34.3, 45.2) +2	servo-bag screw pilot

PART NO.	**CA-201**
TITLE	**Turret plate**
MATERIAL	PETG printed, 0.4 mm nozzle
MASS	24.4 g (CAD, 60 % fill)
QTY	1 per robot
SCALE	3:4
UNITS	mm · general tolerance ±0.2
SOURCE	cad/step/parts/turret_plate.step (from backend/cad/model.py)
PROJECTION	Third angle ⊕◁
SHEET	4 of 13
DRAWN	ME 2331 Project 2 team 2026-11-02