CA-401 Gripper frame

NOTES

1. Hole sizes are the printed sizes from the PETG tolerance table (backend/cad/model.py TOL). Print CA-900 first and adjust TOL if a fit is off.
2. Screws thread straight into the printed pilots (HF kit #67675, no nuts).
3. Datum = the part's bounding-box corner (min X, Y, Z), lower left of the front and top views. Hole centres: (X, Y) for Z holes, (X, Z) for Y holes, (Y, Z) for X holes. ×k = k holes stacked along the axis; +n = n more positions (see the STEP file).
4. Shown in its assembly orientation; the STEP file defines all other geometry.

TOP VIEW

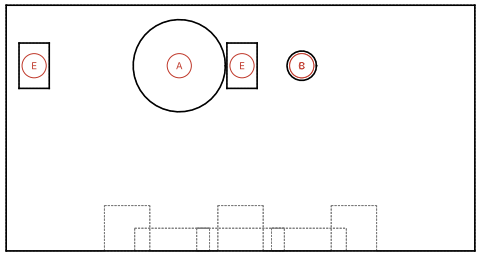

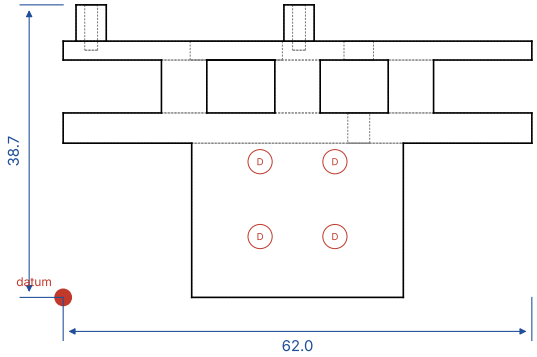

FRONT VIEW

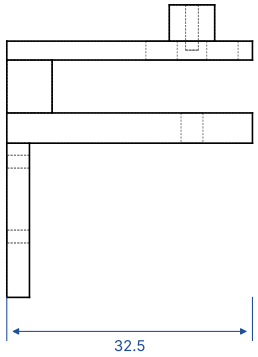

RIGHT VIEW

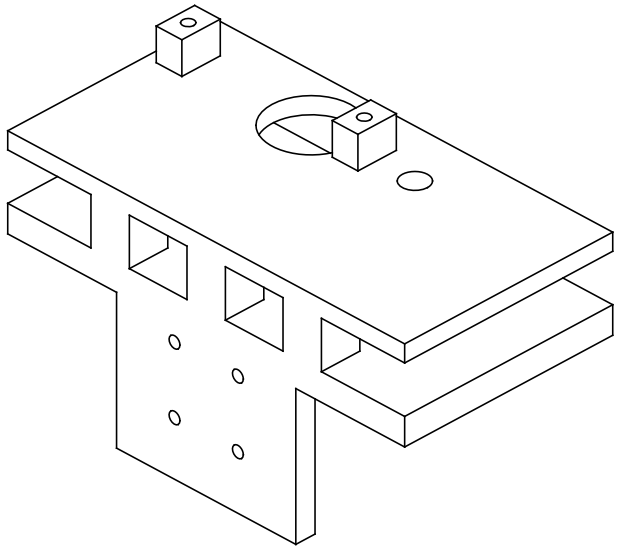

ISOMETRIC (not to scale)

HOLE TABLE (letters mark hole centres on the view along that axis)

	Ø (mm)	×	axis	depth	centres from datum (mm)	fit / feature
A	12.20	1	Z	2.5	(22.9, 24.5)	SG90 spline + boss clearance
B	3.90	1	Z	2.5	(39.1, 24.5)	#6-32 clearance / running
C	2.90	1	Z	4.0	(39.1, 24.5)	#6-32 pilot (self-threading)
D	1.70	4	Y	3.0	(26.1, 8.1); (26.1, 17.9) +2	servo-bag screw pilot
E	1.70	2	Z	6.0	(3.7, 24.5); (31.2, 24.5)	servo-bag screw pilot

PART NO.	**CA-401**
TITLE	**Gripper frame**
MATERIAL	PETG printed, 0.4 mm nozzle
MASS	11.7 g (CAD, 60 % fill)
QTY	1 per robot
SCALE	1:1
UNITS	mm · general tolerance ±0.2
SOURCE	cad/step/parts/gripper_frame.step (from backend/cad/model.py)
PROJECTION	Third angle ⊕◁
SHEET	9 of 13
DRAWN	ME 2331 Project 2 team 2026-11-02