



AFE

U1
BQ76925RGER

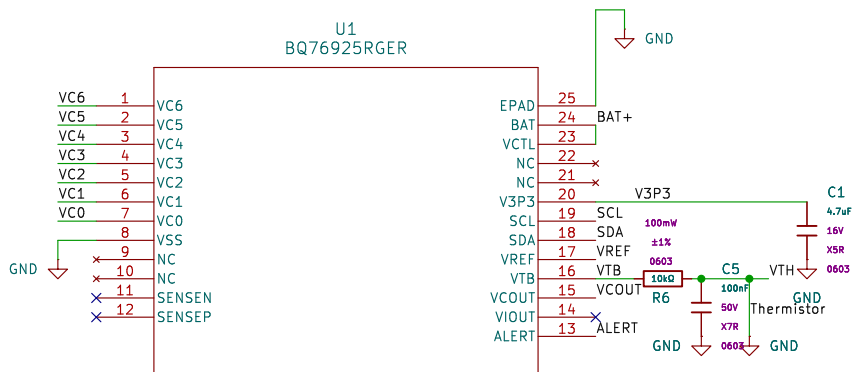

MCU

U2
STM32L431KCux





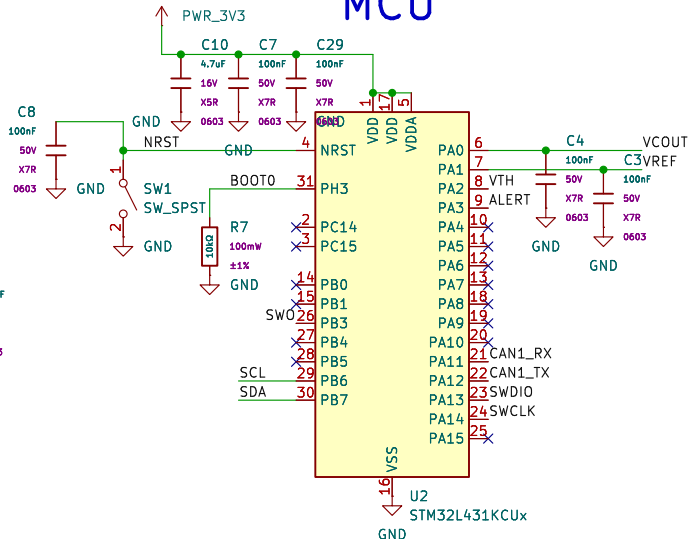


ALL 1% 100mW 0603


PWR_3V3




PROGRAMMING BREAKOUT

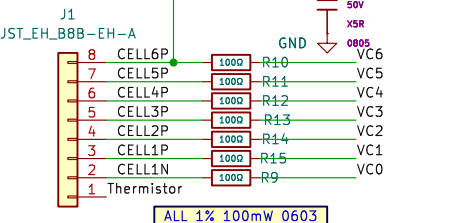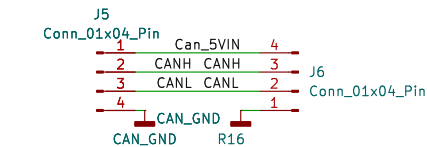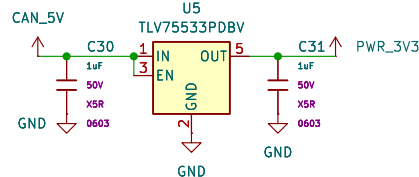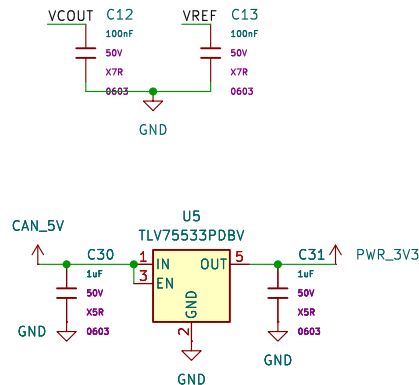


ALL 1% 100mW 0603



ALL 0603 X5R

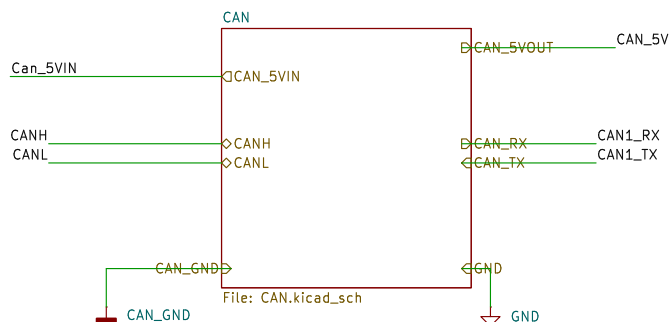

File: CAN.kicad_sch



Sheet: /
File: 6S_BMS.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.6


Date:

Rev:

Id: 1/2

[illegible]

SIGNAL ISOLATION

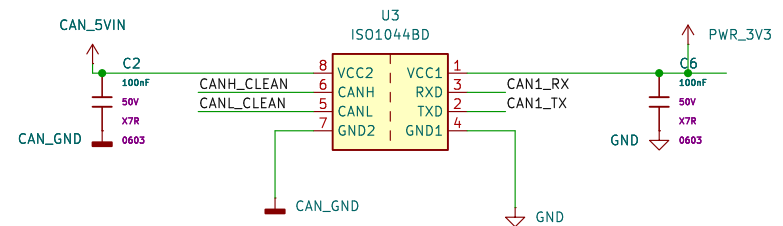

This diagram illustrates the electrical design for a CAN bus interface, focusing on three key aspects: Filtering, Signal Isolation, and Power Isolation.

FILTERING


The filtering circuit (U1) is designed to clean the CAN bus signals. It features two input lines, CANH and CANL, which are connected to the CANH_CLEAN and CANL_CLEAN lines. The circuit includes two diodes (D1, D2) for signal conditioning, two resistors (R1, R2) for current limiting, and two capacitors (C20, C22) for filtering. The output lines are connected to the CANH_CLEAN and CANL_CLEAN lines.

SIGNAL ISOLATION

The signal isolation circuit (U3) is designed to isolate the CAN bus signals from the power supply. It features two input lines, CANH_CLEAN and CANL_CLEAN, which are connected to the CANH and CANL lines. The circuit includes two capacitors (C2, C6) for signal conditioning and two resistors (R1, R2) for current limiting. The output lines are connected to the CANH and CANL lines.

POWER ISOLATION

The power isolation circuit (U4) is designed to isolate the power supply from the CAN bus. It features two input lines, CAN_5VIN and CAN_5VOUT, which are connected to the CANH and CANL lines. The circuit includes two capacitors (C25, C26) for signal conditioning and two resistors (R1, R2) for current limiting. The output lines are connected to the CANH and CANL lines.

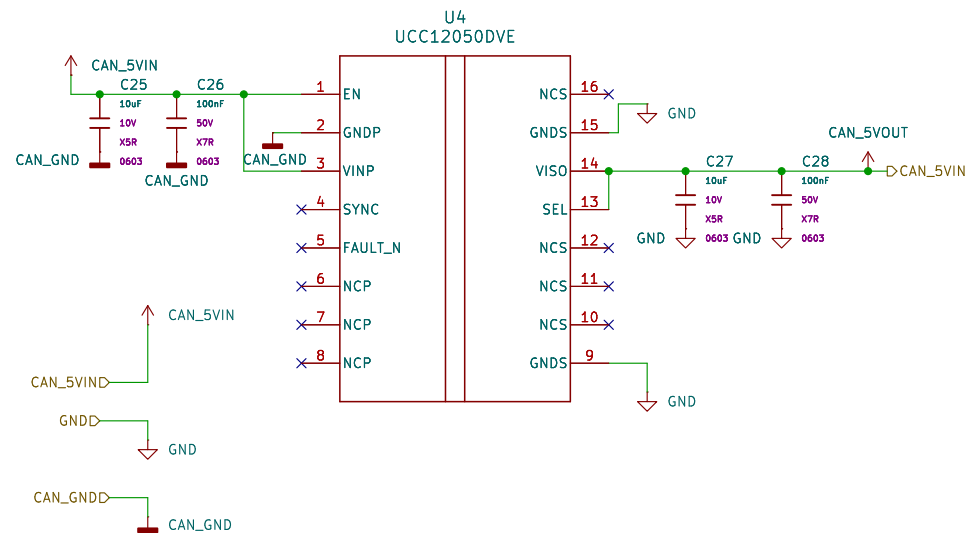

Id: 2/2