




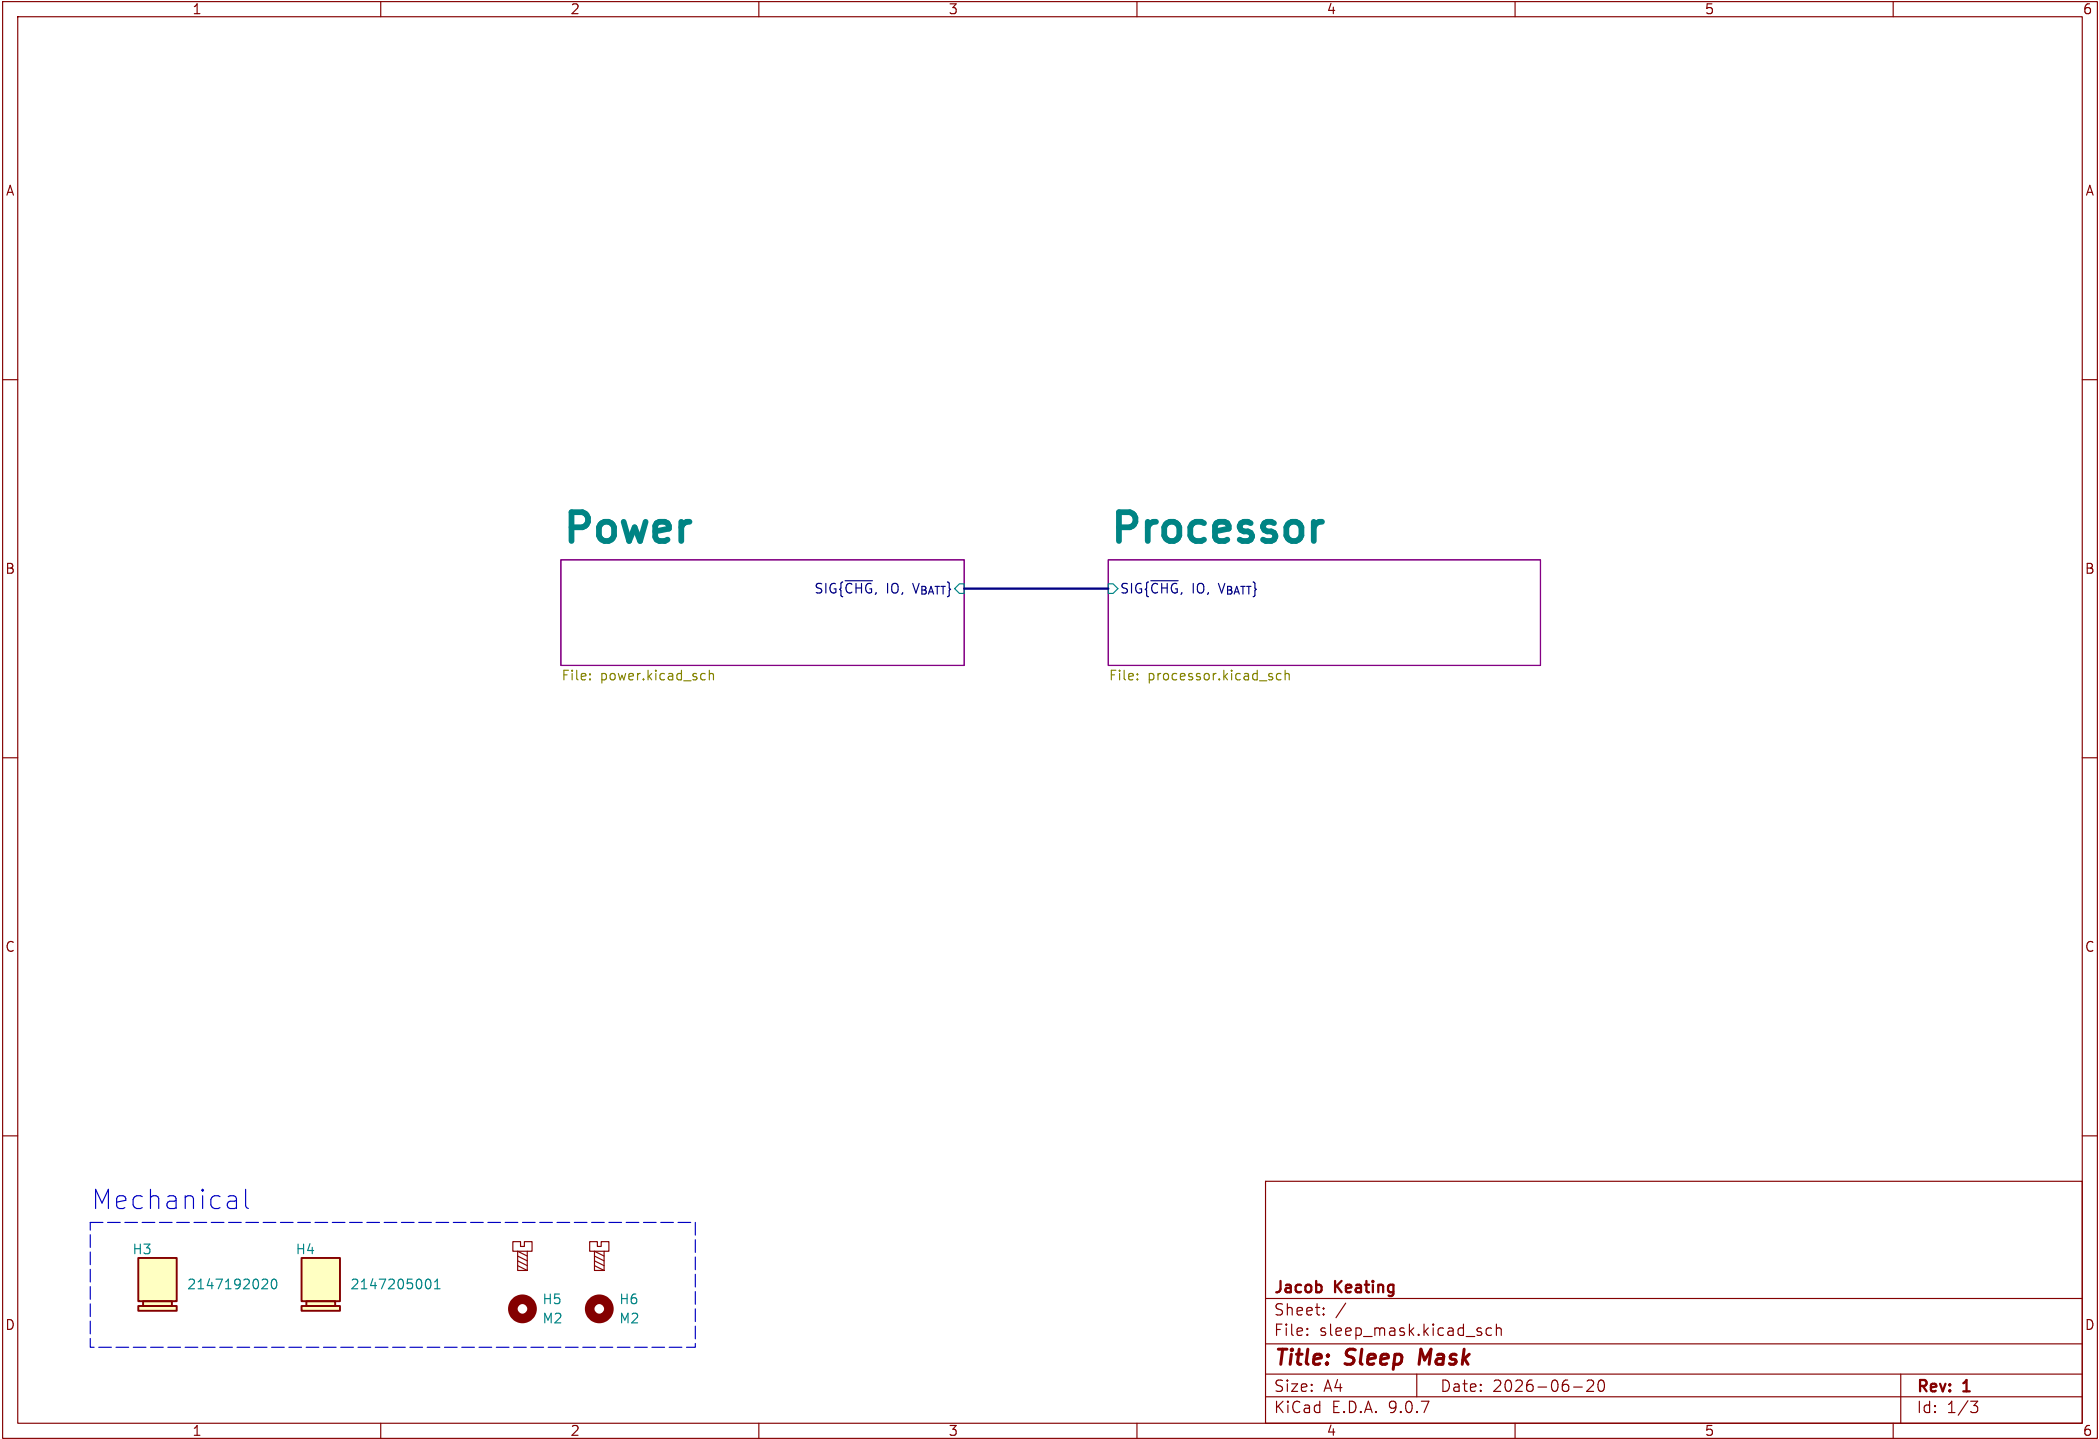


USB-C Input Filtering & Protection

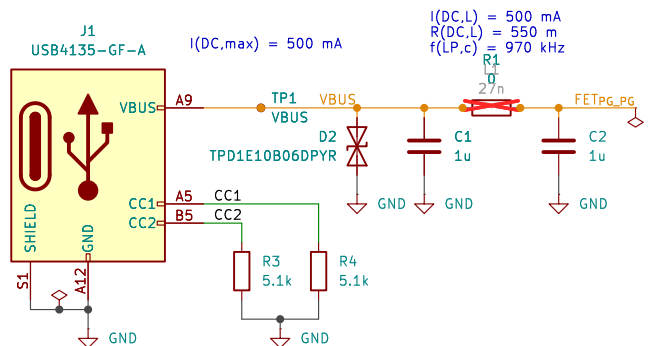


Li-Po Charging Circuit

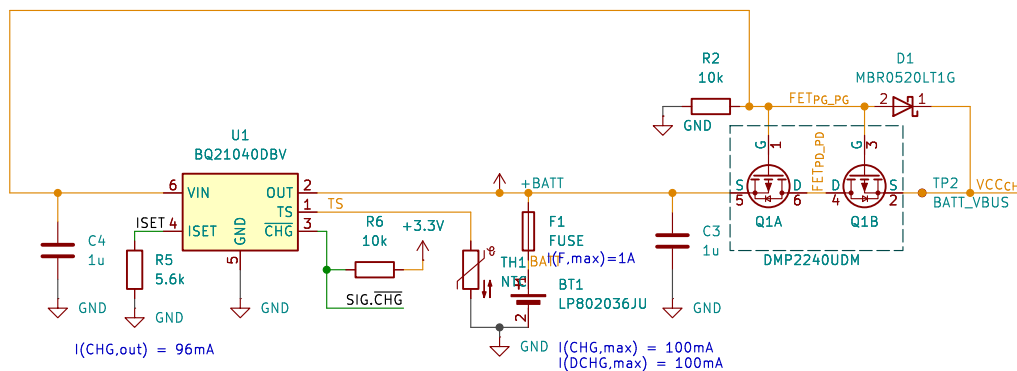


Power Latch & User Input Circuit

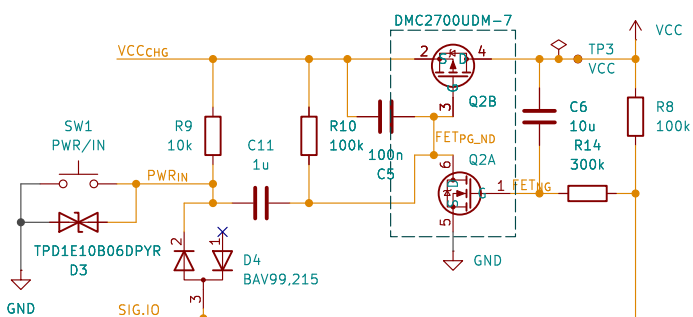

3.3V Digital Rail

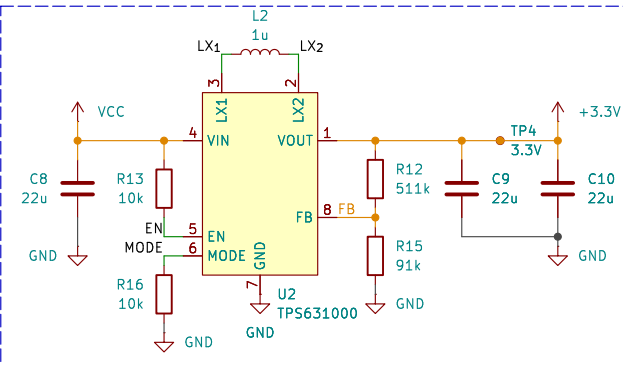

Battery Voltage Input



SIG.CHG
 SIG.IO
 SIG.VBATT

Jacob Keating

Sheet: /Power/
 File: power.kicad_sch

Title: Sleep Mask

Size: A4
 Date: 2026-06-20

KiCad E.D.A. 9.0.7

Rev: 1
 Id: 2/3

[illegible][illegible]

Diagram illustrating the connection of three signals to a single input:

- $SIG.\overline{CHG}$ (Green line)
- $SIG.IO$ (Orange line)
- $SIG.VBATT$ (Blue line)

These signals are connected to the input of a logic block labeled $SIG\{\overline{CHG}, IO, VBATT\}$.

Id: 3/3