

# **Applications of Cellular Automata: Wildfire Spread simulation**

Thomas Barratt, Jacob Dalrymple

December 10, 2019

## 1 Abstract

This project seeks to expand an existing Cellular Automata Game of Life system developed in (*CAPyLE — cross-platform teaching tool*, 2016) to investigate the effects of differing environmental parameters on a forest fire across a fixed terrain.

By constructing a probabilistic model which takes into account parameters pertinent to fire spread (wind speeds and terrain heights, flammability of different plant life), results which concur with the current body of research have been generated.

## 2 Introduction

By implementing a 6-state based model of fire spread across a variable-height terrain with wind and areas of varying flammability, we have been able to simulate the spread of a real forest fire across a simulated environment, dictated by the specification given.

By using a minimal state set and an ancillary 20-value cell attribute grid, we can model complex relationships between the properties of an area in a forest fire to create a stochastic state transition function for each cell in the next time step.

Attempting to relate our simulation to the real world values of forest fires across a similar terrain, we have gradually improved the weighting of various factors to generate a suitable fire spread.

## 3 Background: Literature Review

Consulting existing research into the field of cellular automata can give us a valuable insight into how best to proceed when considering the formulation of a model which can describe the spread of wildfire. Considering what properties are being modelled and the ways in which transitions between state are decided can give us a grounding in this specific problem area. Research into the real world applications of forest fires are fruitful and well explored: using CA to explore forest fires is something that is well researched [(Ntinis, Moutafis, Trunfio, & Sirakoulis, 2017) (Clarke, Brass, & Riggan, 1994) (Trunfio, D'Ambrosio, Rongo, Spataro, & Di Gregorio, 2011)].

Considering the evidence existing papers have used to justify their results, including their empirical values formulated by authors familiar with the problem domain, can provide a good metric for the accuracy of our results.

There are two notable papers in this field whose outcomes seem to overlap strongly with our intentions. Both of these papers consider simulating real world forest fires using cellular automata,

but have different approaches to the use of neighbourhoods and states, and their relationship with the real world properties that affect forest fires.

(Encinas, White, del Rey, & Sánchez, 2007) seeks to model forest fires using a hexagonal grid, modeling various different fuel values as states. By using a hexagonal model, the size of each cells' neighbourhood is increased - allowing more complex calculations to be derived on the basis of a 'near neighbourhood' and 'distant neighbourhood'. The authors of the paper opt to use 3 properties when considering the flammability rate of a cell: wind, topography, and the rate of fire speed. This simplistic model differs from that of (Alexandridis, Vakalis, Siettos, & Bafas, 2008), which includes spread and shape of a forest fire front; the fuel type (type of vegetation); humidity; wind direction and magnitude; terrain topography (slope and natural barriers), fuel continuity (vegetation thickness); and spotting - a phenomenon where burning material is transferred by the wind or other reasons such as the fling of flaming pinecones to areas that are not adjacent to the fire front.

Although the inclusion of additional parameters in (Alexandridis et al., 2008) allows an implementation with greater accuracy in relation to real forest fires, this is only true if the correct relationships and weightings are defined.

(Encinas et al., 2007) following states are defined in the paper:

$\{0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1\}$ , where each value represents a fuel value. This differs from (Alexandridis et al., 2008), where four states were used ( $\{0, 1, 2, 3\}$ ), which represent differing functional states. This choice of state representation is based on the paper's approach to the functional implementation of what means to 'be on fire'.

(Alexandridis et al., 2008)'s model was designed to include the most impactful properties when considering the spread of wildfire. By comparing their results against that of the 1990 Spetses island wildfires, and iteratively changing constants in their transition functions, the authors simulated forest fire spread to a high degree of accuracy - their final results occupying  $5.4km^2$ , with the actual fire occupying  $5.9km^2$ .

To calculate the chance of a cell being 'on fire', (Encinas et al., 2007) uses the following approach. Each parameter [listed above] is given a weighting and a probabilistic model is used for each parameter to calculate the total chance of a cell being set on fire in the next time step ( $t + 1$ ).

The chance of fire,  $p_{burn}$ , is given as:

$$p_{burn} = p_h(1 + p_{veg})(1 + p_{den})p_w p_s$$

where:

$p_h$  = constant probability that a cell adjacent to a burning cell containing a given type of vegetation and density will catch fire at the next time step under no wind and flat terrain

$p_{den}, p_{veg}, p_w, p_s$  = the density of vegetation, the type of vegetation, the wind speed and the slope, respectively.

In contrast, (Encinas et al., 2007) looked to find the optimal values in any forest fire, using purely mathematical models which consider heavily the boundary conditions of each of the hexagon cells in an inhomogeneous forest neighborhood.

This difference in approach, applied versus maximum mathematical, shows the effect of the fuzzy nature of real life. (Alexandridis et al., 2008), which looked towards a case study to generate its values, relied on empirical constants, whereas (Encinas et al., 2007) focused entirely on a formulaic approach.

When considering the use of CA in our study, the question of whether a case study based approach has to be answered. Due to the greater knowledge of the existing authors on the topic, ensuring the work presented here is the best position to build on their findings is essential.

The use of additional parameters such as humidity to predict the spread of the forest fire, along with their use of real world GIS values gives rise to a greater accuracy of results (in relation to the real world spread of forest fires) when compared to the default criteria to be implemented.

To meet the criteria given, the insights regarding the weighting of different parameters and the use of a probabilistic model to calculate the chance of a cell burning offer a credible starting point.

The two papers discussed above implement the idea of 'fuel' in different ways. (Alexandridis et al., 2008) structures fuel as a property of the states, whereas (Encinas et al., 2007) provides different states for different levels of fuel.

The advantage of moving the fuel state into an attribute of the cell is the greater precision of fuel that can be stored, while also maintaining a smaller amount of states. By limiting fuel state to discrete variables, the forest fire spread will lose valuable resolution which can be maintained with a different data structure.

## 4 Methodology

Cellular Automata is a term to describe the simulation of a discrete number of cells and interactions across a cell space (grid). Each cell can have one state at any one time step (generation). Cells can change state. The permitted changes from any one state to another state is determined by a transition function. The transition function can consider global properties, such as the current time step, as well as local properties, such as the cell's current state, as well as its neighbourhood - a set of cells near the cell.

By representing small sections of the terrain as cells, cellular automata can be used to simulate the spread of the fire across the grid. The amount of cells can be thought of as the resolution of the simulation.

After consulting existing literature, the following functional states were devised.

0. **Burnt out** - cells which were once on fire, but have no fuel remaining.
1. **Burnable grass** - the default state for the terrain, as listed by the specification
2. **Dense Forest** - Thick forest with more ‘fuel’ than burnable grass, but which is harder to ignite.
3. **High Flammable Scrub** - A low fuel but highly flammable substance, found in the valley in the specification
4. **On fire** - cells which are on fire
5. **Buildings** - cells which are buildings, this represents the town on the map.
6. **Water** - a state which can never be on fire.

These states represent the same approach as that of (Alexandridis et al., 2008), where each state represents a functionally different cell. This state model is an extension of a binary state CA given as a starting point for this assignment. The migration away from a two state model was necessary to capture the detail provided in the specification and also to implement some of the core findings from existing literature.

Burnable grass, Dense Forest and High Flammable Shrub are all variations of a burnable substance, and although this could be managed entirely within the attribute grid for each cell, having dedicated states allows the representation of the differing areas with different colours with the CaPyle simulation engine (*CAPyLE — cross-platform teaching tool*, 2016).

State	Valid transition states
Burnt Out	Burnt out
Burnable grass	Burnable grass, On fire
On fire	On fire, Burnt out
Buildings	Buildings, On fire
Water	Water

Figure 1: Valid state transitions for each of the states in the CA.

To produce a performant simulation which can cope with many generations, values which can be precomputed are done so in a setup function, and are then added to the attributes grid as an additional dimension.

The transitions between states are then calculated using these attributes for each cell (along with the local properties of the cell, such as number of neighbours in a certain state), which are stored in an 20-value array for each cell in a grid equal in width and height to the grid.

- 0. Height - Scalar value (m)
- 1. Flammability
- 2. Humidity
- 3. Fuel
- 4-12. Wind difference vectors (difference between wind in cell and neighbours) ( $ms^{-1}$ )
- 13-20. Height difference vectors (difference between height in cell and neighbours) (m)

In the current system, although humidity attributes are passed for every cell, they are not used when calculating the probability of ignition. This is an area that could be developed on with further investment.

#### 4.1 Modelling the effect of wind in the model

Wind has a significant effect on wildfires, with research suggesting that even a wind speed of 2 to  $6ms^{-1}$  can increase the spread of the fire by an additional 50% (Beer, 1991). As wind heavily is discussed in both (Alexandridis et al., 2008) and (Encinas et al., 2007), factoring wind into this model would effectively build on their findings.

By computing 8 wind weights for each cell that affect the spread of fire in the 8 directions of the model, the directional influence the wind has on the fire front can be simulated. To calculate the wind's affect (Alexandridis et al., 2008)'s method will be adapted for this implementation - by using the computed weights present within, we can measure the winds affect in meters per generation.

For every cell in the grid wind weights are calculated for each of the possible 8 directions the fire could be approaching .i.e North, East, North East etc.

By initially setting wind to be two scalars, an  $\pm$  value for wind in the X axis, and in the Y axis, and then converting this to a vector, we can then find the angle between the wind vector  $v_w$  and each of the fire direction vectors  $v_f$  using the cosine rule:

$$\theta = \arccos \frac{v_w \cdot v_f}{|v_w||v_f|}$$

The wind weight can be calculated using the formula:

$$w = \exp(a_1 \cdot |v_w|) \exp(a_2 \cdot |v_w| \cdot (\cos(\theta) - 1))$$

Where  $a_1$  and  $a_2$  are weights, calculated by (Alexandridis et al., 2008), which are derived from studying the growth of the 1992 Spetses Island forest fire.

These calculations can be done in the preprocessing steps before the simulation runs, reducing the computational complexity of the simulation.

#### 4.1.1 Modelling the effect of height in the model

The implementation of height in this model begins with an assumption: rate of flammability is inversely proportional to the height difference.

In the setup phase, heights are defined for each cell. Each cell has access to the heights of its neighbours through the cell attributes grid. During the ignition probability calculation, the height weights can then be calculated from the values in the cell attributes grid (done so in the `cal_height_weight`). By calculating the difference in the heights between a cell and its neighborhood, a cell's chance of setting on fire can be affected by the number of on fire cells and this distance.

#### 4.1.2 Modelling airdropped water

As per the specification, ensuring we can air drop water at a custom time interval is required. To achieve this, allowing for a dynamic `time_to_drop` variable which can be adjusted has been added to the model.

By setting this to different intervals, we can see the effects of dropping water on the fire front.

### 4.2 Calculating transitions

Using the methods defined in (Alexandridis et al., 2008) as a basis for our transitions, our grid is computed at every interval using two behaviours, `ignite` and `reduce_fuel`, which perform as their names suggest, both returning new, computed versions of the grid.

#### 4.2.1 Ignite

Ignite works by assigning a probability that a cell will transition into a burning state, the ignition probability of cell  $c$  is calculated as follows:

$$prob(c) = 0.5n(c) * f(c) * w(c) * h(c) * v$$

where  $n(c)$  returns a 1 if the cell has any on fire neighbours, or 0 if it has none;  $f(c)$  is the rate of flammability for the cell (`rate_of_flam`);  $w(c)$  is the wind weight for that cell;  $h(c)$  is the height weight for the cell, and  $v$  represents a degree of randomness.

The height weight for a cell is computed by comparing the current cell against its on fire neighbours' heights. For every neighbour that is on fire, the `height_weight` is increased by a factor of the height difference ( $0.0051 * \text{height difference}$ ).

Similarly, the wind weight for a cell is computed by consulting the 8-dimensional wind magnitude grid attributes generated at setup. For each on fire neighbour of a cell, the associated wind value from the 8-dimensional grid attributes grid is summed.

#### 4.2.2 Reduce Fuel

The fuel reduction technique considers every cell in the grid whose fuel attribute is greater than 0. The algorithm subtracts the `rate_of_flam` attribute from the current `fuel` value, clipping the results to 0.

## 5 Results

After devising a model which can allow for differing wind speeds, heights and various different types of flammable land on a cellular automata grid, investigations into the possible scenarios requested by the town officials can begin. It has been suggested that a forest fire can travel anywhere between  $0.46ms^{-1}$  (Viegas et al., 2009). As listed by the provided specification, the proposed location of the incinerator is  $70.71km$  away from the furthest edge of the town.

This would indicate it would only take 72.7 hours to reach the town. This would mean that each generation is equal to  $502.4s$ , on the assumption that the average speed of a wildfire is  $0.46ms^{-1}$ .

### 5.1 Effects of Different Initial Fire Locations

The number of generations it takes the fire to reach the town based on the different fire start locations are listed below:

- Power plant (north west corner) = 226 generations.
- Incinerator (north east corner) = 305 generations.

The number of generations is taken as an average over 5 runs.

### 5.2 Wind Direction

The town is situated  $70.81km$  away from the incinerator in a south easterly direction - a wind in this direction would increase the velocity towards the town. Although the specification presented does not specify a region of the United States, a report by (Thompson, Calkin, Finney, Ager, & Gilbertson-Day, 2011) suggests the state of California is most prone to wildfires (50.22%).



Research by Guzman-Morales et al. proposes the average wind speed in wildfire season in California (traditionally September to January) is about  $6ms^{-1}$ , and also creates three boundaries: Low winds ( $< 5ms^{-1}$ ), moderate winds ( $5 - 15ms^{-1}$ ), and extreme winds ( $\geq 15ms^{-1}$ ) (Guzman-Morales, Gershunov, Theiss, Li, & Cayan, 2016).

By assessing the impact of these differing wind speeds, the impact of an incinerator fire can be shown in realistic boundaries. Results were taken for three different wind speeds based on the values above. These are listed as  $mgen^{-1}$ , or meters per generation.

The number of generations to reach the town with no wind is 306.

CD	$\pm 6mgen^{-1}$	$\pm 10mgen^{-1}$	% $\Delta$	$\pm 15mgen^{-1}$	% $\Delta$	Avg. gens	Avg. % $\Delta$
South-West	298	296	-0.68%	315	6.03%	303.00	2.68%
West	325	349	6.88%	385	9.35%	353.00	8.11%
South	335	379	11.61%	388	2.32%	367.33	6.96%
North	460	600	23.33%	921	34.85%	660.33	29.09%
East	478	669	28.55%	1085	38.34%	744.00	33.45%
North-West	465	748	37.83%	2337	67.99%	1183.33	52.91%
(130,10), (140, 20)	77	303	311	306	-3	5	0

Various wind directions and magnitudes and resultant number of generations taken to reach the city, number of generations is an average over 5 runs.

The results presented above suggest a successful wind technique has been implemented: the winds that blow away from the town do result in an increased number of generations before the fire hits.

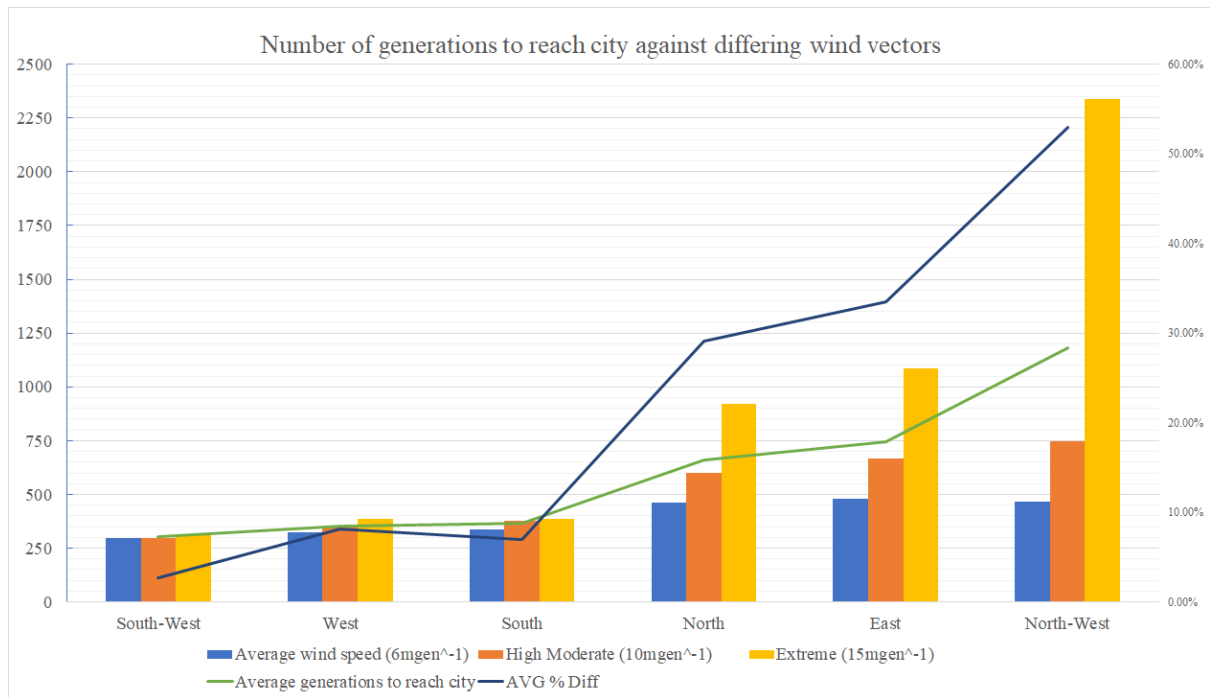


Figure 2: Graph showing the number of generations taken to reach the city against differing wind speeds.



Figure 3: In extreme South Westerly winds, the fire is affected by the placement of the dense forest, canyon, and water, such that the spread towards the town is slower than that of a fire with lower wind speeds.

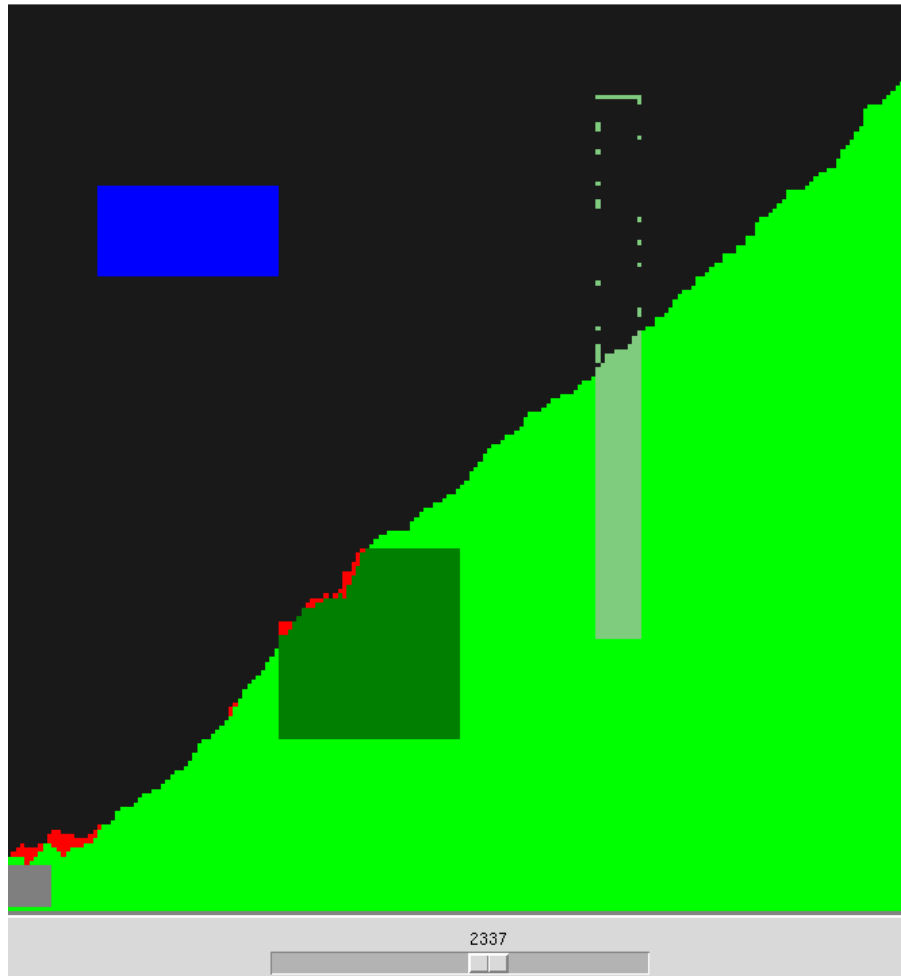


Figure 4: In extreme North Westerly winds, the majority of the fire spread misses the town. It is only after roughly 2100 generations does the fire eventually spread in the south direction enough to reach the town.

### 5.3 Best water locations

Due to the small size of the water available, ensuring the timely deposit of the water is essential to its effectiveness.

By experimenting with different water locations across the grid, and comparing the amount of time it takes for the fire to reach the city, it is possible to devise an optimal location. Setting the wind values to 0 helps remove any wind effects from our initial calculations.

Due to the nature of this solution's implementation, the time step at which water can be dropped can be adjusted. Because this system simulates an 'airdrop' of water, it was important to try

and simulate the effects of the water being dropped at various different points in time, and at different points on the fire front.

### 5.3.1 Choosing locations

It is important in our assessment of optimal water location to choose the best areas to sample, not least due to the small size of the water available ( $10km^2$ ). (Christopher, 2016) suggests the optimal placing of water in a forest fire is near the source, and on the ‘attacking front’ of the fire.

To this end, the following water placements were devised:

- (190, 200). The top right. What would happen if the fire could be stopped early into its journey?
- (10, 190). Bottom right hand side of the town. A similar tactic as above. These are the nearest two sides to the wildfire front.
- (130,140). The southern end of the canyon - similar tactic.
- (80, 100). Between the lake and the dense forest - Does decreasing this area make a difference?
- (10,182). The top of the town. If for whatever reason it wasn’t feasible for the crews to reach the start of the fire, would an effective preventative measure be blocking the surrounding area near the town?
- (80, 75). The same tactic but closer to the lake
- (130,10). The northern end of the canyon - This is to try and make a blockade which extends the journey of the fire.

### 5.3.2 Results

*Default number of generations: 306*

$c$  is the generation at which the fire reaches the water’s eventual location.

$gens_x$  is the number of generations it takes for the fire to reach the town when the water is placed at generation  $x$ .

Water coordinates	$c$	$gens_0$	$gens_c$	$gens_{c+10}$	$\Delta gens_0$	$\Delta gens_c$	$\Delta gens_{c+10}$
(190, 200), (200,10)	0	$\infty$	$\infty$	$\infty$	$\infty$	$\infty$	$\infty$
(10, 190), (20,200)	295	314	310	306	8	4	0
(130,140), (140, 15)	172	312	304	298	6	-2	-8
(80,100),(90,11)	157	309	309	306	3	3	0
(10,182), (20, 192)	290	308	313	307	2	7	1
(80, 75), (90,85)	150	303	310	309	-3	4	3
(130,10), (140, 20)	77	303	311	306	-3	5	0

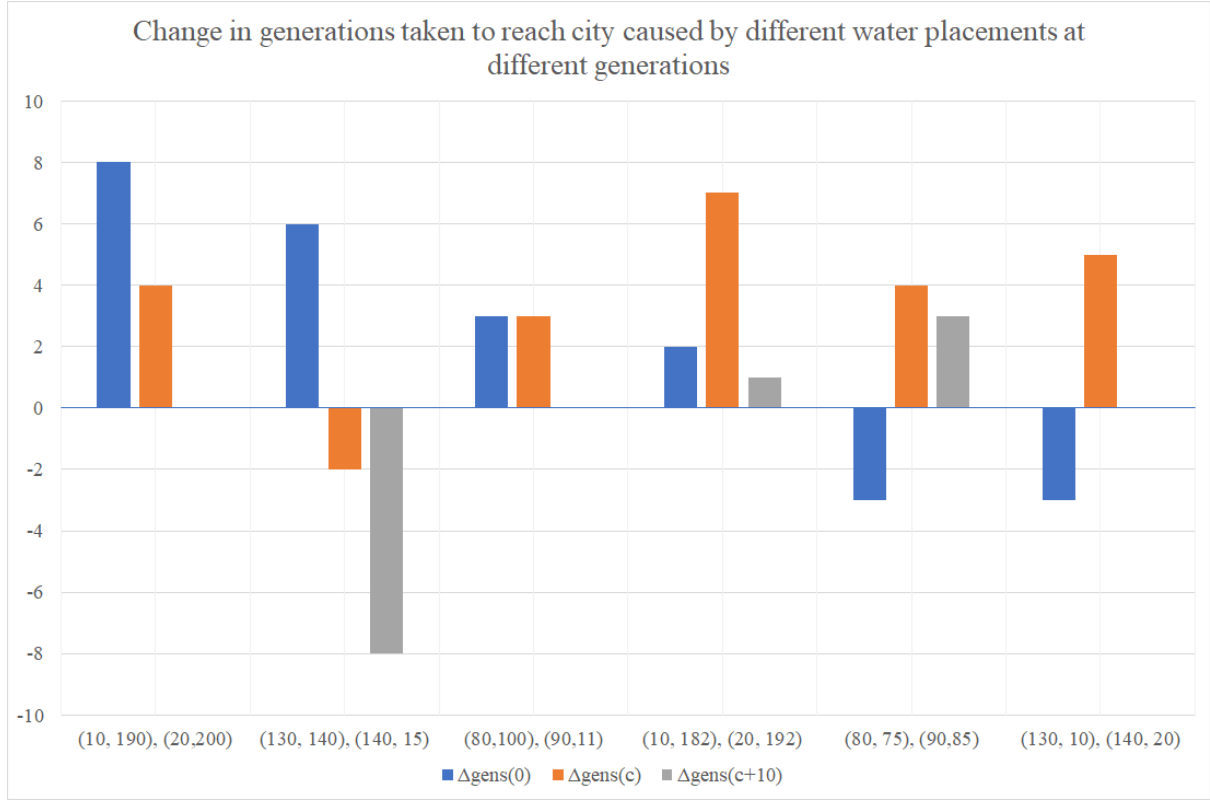


Figure 5: Graph showing the change in generations taken to reach city, caused by the differing water placements at different generations.

#### 5.4 Dense forest locations

There is the opportunity to add additional dense forest to the terrain, via extension of the existing block. Choosing the best extension of this forest is a trial and error process, for which the following extensions were consulted:

- Double the width, the additional on the west side
- Double the width, the additional on the east side
- Double the width, the additional split equally on both sides
- Double the height, the additional on the north side
- Double the height, the additional on the south side
- Double the height, the additional split equally on both sides

Direction	generations
default	306
<b>to E</b>	<b>328</b>
to W	309
W + E	313
to N	326
to S	304
N + S	326

Because SW wind produced the a fire front which met the town the quickest, analysing dense forest location within this domain was also performed.

Direction	generations
default	296
<b>to E</b>	<b>354</b>
to W	327
W + E	301
to N	334
to S	282
N + S	323

## 6 Discussion of model and conclusions

The results from the simulations show that the town is at great risk if a forest fire is ignited at the incinerator and/or power plant site.

### 6.0.1 Effects of Fire's Start Location

The model shows that a forest fire started at the powerplant will reach the town 79 generations sooner than at the incinerator with neutral wind conditions. As a results a fire originating from the power plant has the potential to be more damaging to less time for the town to react.

### 6.0.2 Effects of Wind

The model shows that the wind has a big impact on the time it takes for the fire to spread to the town, in neutral conditions it takes a forest fire 306 generations to reach the town; with a south-westerly wind reducing the amount of time to 298 generations and a north-eastern wind increasing to 2337 generations, these results line up with intuition.

The amount a south-westerly wind affects the speed of fire is extremely variable ranging from 280 to 350 generations to reach the town due to whether or not the canyon would catch fire. With higher wind speeds decreasing the chance the canyon ignites leading to higher variability in higher wind speeds.

This is due to forest fires traveling slowly downhill compared to level ground, and when a fire front reaches a sheer drop, as is the case in the model, the probability of the canyon floor alighting is very low.

When the canyon doesn't alight it acts as a barrier slowing down the fire, however when it does alight it accelerates the fire front towards the town due to the high flammability of the scrubland compounded by the uphill slopes increasing the speed of the fire.

Due to the stochastic nature of whether the canyon alights or not, variability is introduced in each iteration. This allows for the model to explore different possible outcomes through the mode behaving differently every time.

The model captures the similar wind effects as (Encinas et al., 2007) in term of how the shape of the fire front is influenced by the wind. (Alexandridis et al., 2008)'s method of wind weighting is implemented in this model and the same behaviours in regard to wind are observed in the two models with the wind guiding the primary direction of the fire front.



### 6.0.3 Effects of Water Drop Locations

In modeling the effect of dropping  $10\text{km}^2$  area of water in a variety of locations the maximal change in number of generations to reach the town is  $\pm 8$ . This suggests this isn't an effective strategy which is supported by relevant literature (Christopher, 2016).

### 6.0.4 Effects of Dense Forest Area

Extending the dense forest area towards the east was found to reduce the number of generations it took for the fire to reach the town the most by 22 generations. This measure was the most effective in delaying the fire front when a strong south-western wind was introduced, delaying the fire front by 56 generations.

This could be a potential counter measure in a worst case scenario of a forest fire burning with a north-westerly wind to delay the fire front for evacuation.

### 6.0.5 Limitations and Possible Improvements of the Model

The main limitation of the model are the simplification of height with a basic proportional relationship being assumed, an improvement to this would be to use a more complex approach that more accurately models the relationship between height and fire fronts.

A hexagonal grid could be implemented in stead of a grid would also better model the spacial relationship of a forest fire as shown in (Encinas et al., 2007)'s approach, however the increased computational run time induced by this method was a factor for using a grid. Other parameters could of be used in the formulation of the ignition probability such as humidity, however the lack of data to implement an accurate approach was a limiting factor.

Another improvement would be the ability to model more solutions to the forest fire such as fire breaks or controlled burning, such additions would provide important insights in forest fire counter measures.

## 7 Conclusion

In conclusion the addition of a new incinerator greatly increases the risk of forest fires in an area already vulnerable due to the power plant. Counter measures explored in this report are not enough to stop a forest fire, with air dropping water having a negligible impact and extending dense forest only delaying the forest fire.

## References

- Alexandridis, A., Vakalis, D., Siettos, C., & Bafas, G. (2008). A cellular automata model for forest fire spread prediction: The case of the wildfire that swept through spetses island in 1990. *Applied Mathematics and Computation*, 204(1), 191 - 201. Retrieved from <http://www.sciencedirect.com/science/article/pii/S0096300308004943> doi: <https://doi.org/10.1016/j.amc.2008.06.046>
- Beer, T. (1991, Feb 01). The interaction of wind and fire. *Boundary-Layer Meteorology*, 54(3), 287–308. Retrieved from <https://doi.org/10.1007/BF00183958> doi: 10.1007/BF00183958
- Capyle — cross-platform teaching tool. (2016, May). University of Sheffield. Retrieved from <https://pjworsley.github.io/capyle/>
- Christopher, B. (2016). *Does using airplanes to put out forest fires actually work?* Retrieved from <https://priceconomics.com/does-using-airplanes-to-put-out-forest-fires/>
- Clarke, K. C., Brass, J. A., & Riggan, P. J. (1994). A cellular automaton model of wildfire propagation and extinction. *Photogrammetric Engineering and Remote Sensing*, 60(11): 1355–1367, 60(11), 1355–1367.
- Encinas, L. H., White, S. H., del Rey, A. M., & Sánchez, G. R. (2007). Modelling forest fire spread using hexagonal cellular automata. *Applied Mathematical Modelling*, 31(6), 1213 - 1227. Retrieved from <http://www.sciencedirect.com/science/article/pii/S0307904X06000916> doi: <https://doi.org/10.1016/j.apm.2006.04.001>
- Guzman-Morales, J., Gershunov, A., Theiss, J., Li, H., & Cayan, D. (2016). Santa ana winds of southern california: Their climatology, extremes, and behavior spanning six and a half decades. *Geophysical Research Letters*, 43(6), 2827–2834. Retrieved from <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1002/2016GL067887> doi: 10.1002/2016GL067887
- Ntinias, V. G., Moutafis, B. E., Trunfio, G. A., & Sirakoulis, G. C. (2017). Parallel fuzzy cellular automata for data-driven simulation of wildfire spreading. *Journal of computational science*, 21, 469–485.
- Thompson, M. P., Calkin, D. E., Finney, M. A., Ager, A. A., & Gilbertson-Day, J. W. (2011, Aug 01). Integrated national-scale assessment of wildfire risk to human and ecological values. *Stochastic Environmental Research and Risk Assessment*, 25(6), 761–780. Retrieved from <https://doi.org/10.1007/s00477-011-0461-0> doi: 10.1007/s00477-011-0461-0
- Trunfio, G. A., D'Ambrosio, D., Rongo, R., Spataro, W., & Di Gregorio, S. (2011). A new algorithm for simulating wildfire spread through cellular automata. *ACM Transactions on Modeling and Computer Simulation (TOMACS)*, 22(1), 6.
- Viegas, D. X., et al. (2009). Recent forest fire related accidents in europe.