






REVISIONS						REVISIONS					
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
▲	1	DIS-C-000585	T.K	E.K	07.07.27	▲					. .
▲					. .	▲					. .
▲					. .	▲					. .

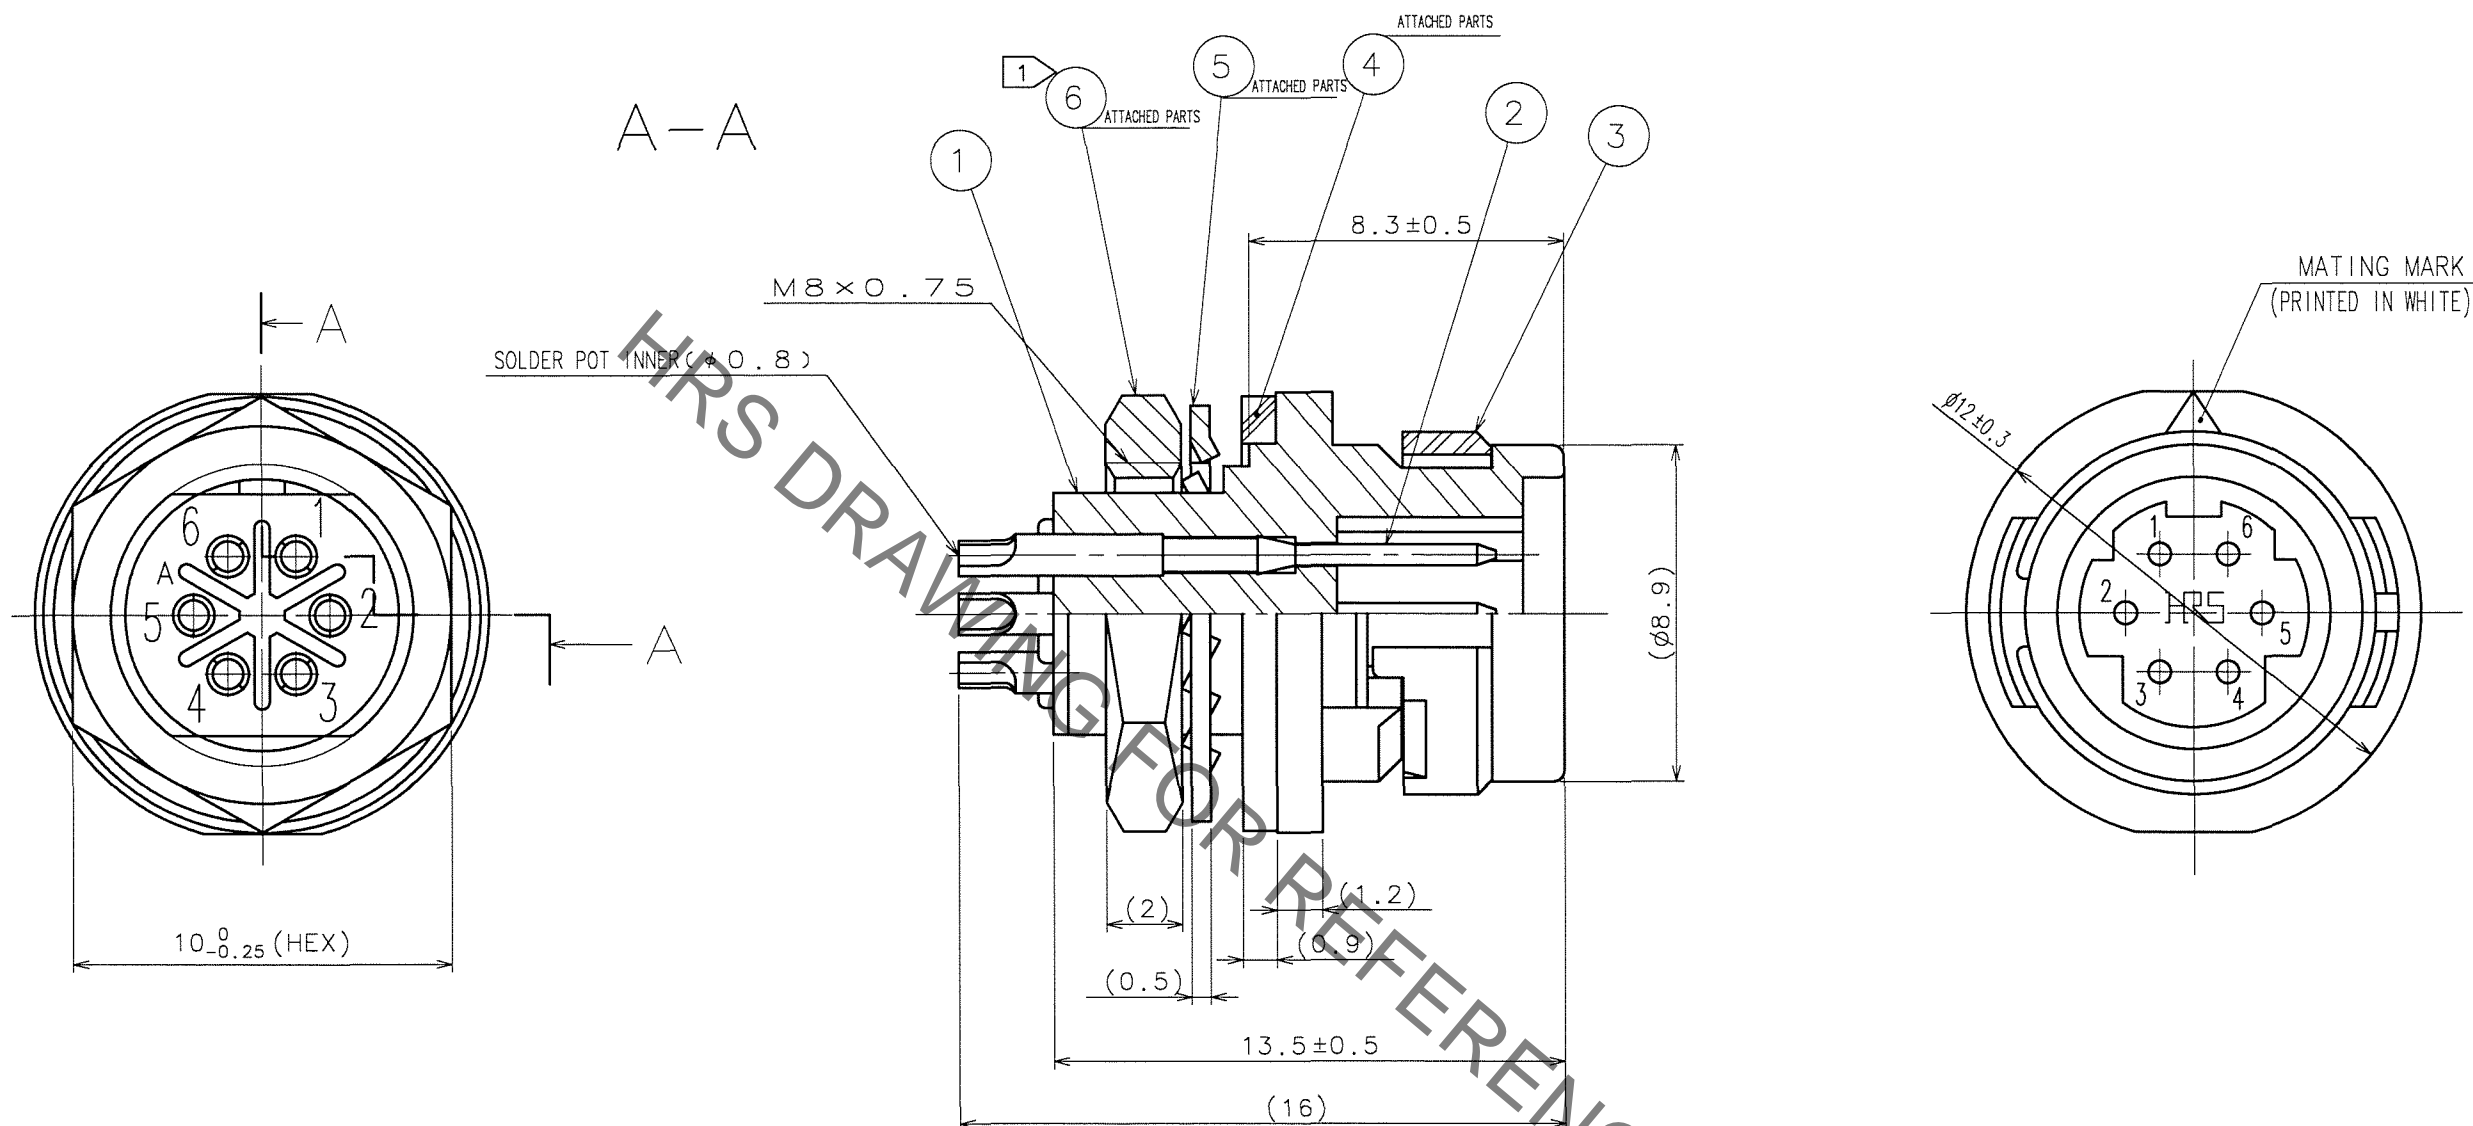

- NOTES ① THE RECOMMENDED CLAMP TORQUE OF REF. NO.⑥ TO BE $0.5N \cdot m$.
LOCTITE 271, LOCPRIMER 7649, LOCTITE JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑥ FROM LOOSENING.
- ② TABLE FOR SOLDERING IS AVAILABLE HR30-6R-6P-T01.
- ③ SURFACE PLATING: GOLD PLATING $0.2\mu m$ min.
UNDER PLATING: NICKEL PLATING $2\mu m$ min.

3	PPS	(BLACK)	6	BRASS 	NICKEL PLATING
2	BRASS		5	PHOSPHOR BRONZE	NICKEL PLATING
1	PPS	(BLACK) UL94V-0	4	CR	(BLACK)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN M. HANYU '05 8 8	DESIGNED H. NAGANO '05 8 8	CHECKED E. KUNII '05 8 10	APPROVED M. SATO '05 8 10	RELEASED .
----------------	------------------------------	----------------------------------	---------------------------------	---------------------------------	---------------

 SCALE 5 : 1 UNITS mm	DRAWING NO. EDC3-112023-71	PART NO. HR30-6R-6P(71)
	 HIROSE ELECTRIC CO., LTD	CODE NO. CL130-1009-0-71

PANEL THICKNESS (0.7 ~ 2)

TO
R