

1. Description


1.1. Project

Project Name	cube
Board Name	cube
Generated with:	STM32CubeMX 4.21.0
Date	06/29/2017

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

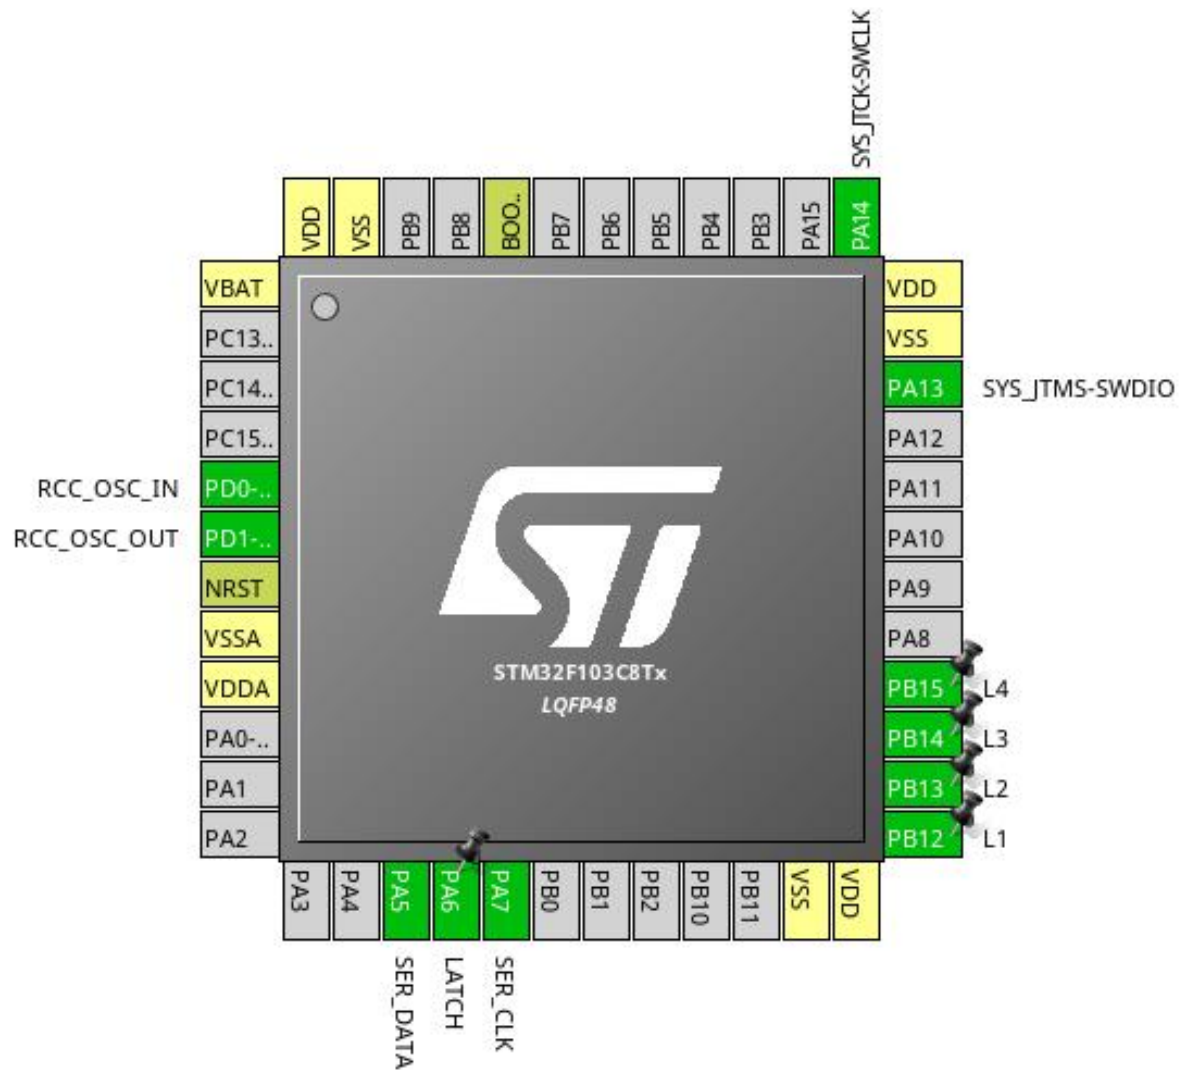


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
15	PA5	I/O	SPI1_SCK	SER_DATA
16	PA6 *	I/O	GPIO_Output	LATCH
17	PA7	I/O	SPI1_MOSI	SER_CLK
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Output	L1
26	PB13 *	I/O	GPIO_Output	L2
27	PB14 *	I/O	GPIO_Output	L3
28	PB15 *	I/O	GPIO_Output	L4
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

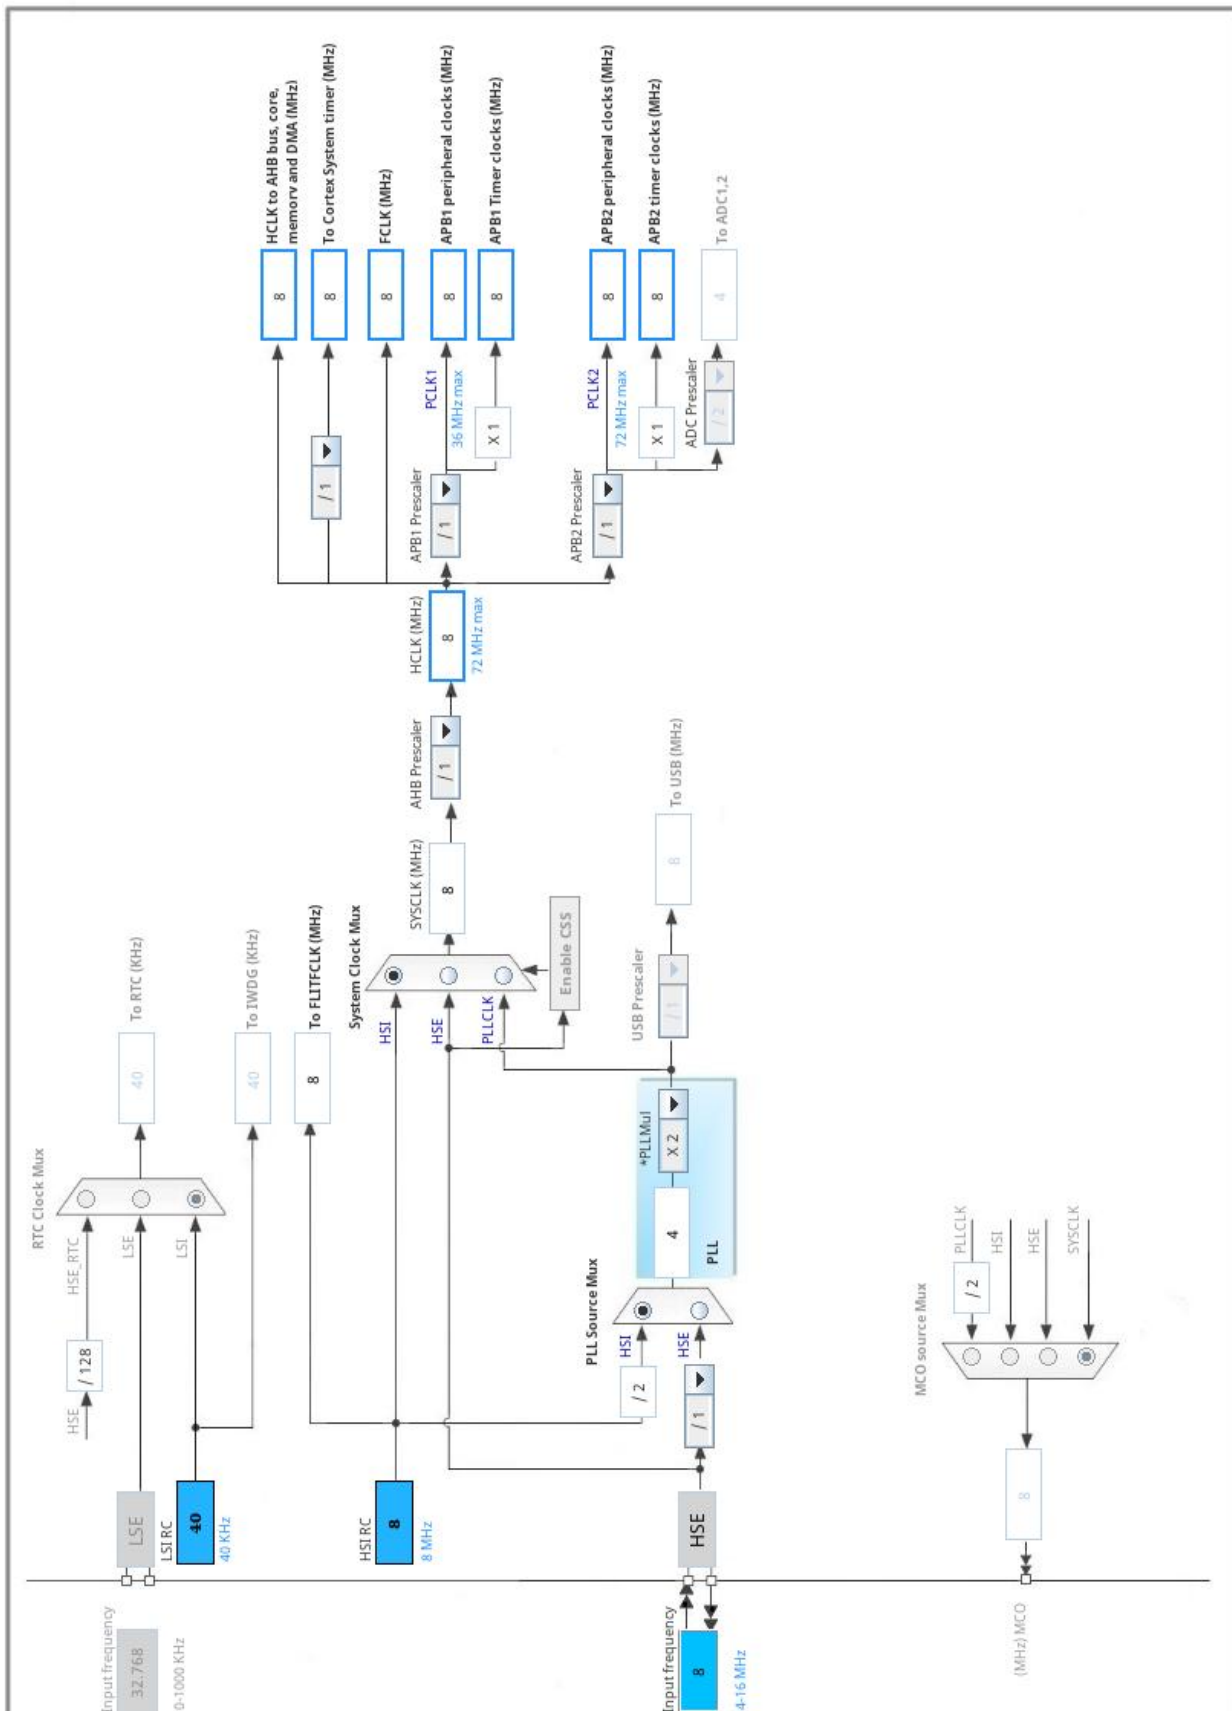

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.2. SPI1

Mode: Transmit Only Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	4.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.4. TIM2

Clock Source : Internal Clock

5.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	High *	SER_DATA
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	High *	SER_CLK
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
GPIO	PA6	GPIO_Output	Output Push Pull	n/a	Low	LATCH
	PB12	GPIO_Output	Output Push Pull	n/a	Low	L1
	PB13	GPIO_Output	Output Push Pull	n/a	Low	L2
	PB14	GPIO_Output	Output Push Pull	n/a	Low	L3
	PB15	GPIO_Output	Output Push Pull	n/a	Low	L4

6.2. DMA configuration

DMA request	Stream	Direction	Priority
SPI1_TX	DMA1_Channel3	Memory To Peripheral	Low

SPI1_TX: DMA1_Channel3 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel3 global interrupt	true	0	0
TIM2 global interrupt	true	0	0
SPI1 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	cube
Project Folder	/home/elias/ledcube/firmware/cube
Toolchain / IDE	Makefile
Firmware Package Name and Version	STM32Cube FW_F1 V1.4.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No