

- T.6.1.2 Cylinder Certification - The gas cylinder/tank must be commercially manufactured, designed and built for the pressure being used, certified by an accredited testing laboratory in the country of its origin, and labeled or stamped appropriately.
- T.6.1.3 Pressure Regulation - The pressure regulator must be mounted directly onto the gas cylinder/tank
- T.6.1.4 Lines and Fittings - The gas lines and fittings must be appropriate for the maximum possible operating pressure of the system.
- T.6.1.5 Insulation - The gas cylinder/tank must be insulated from any heat sources
- T.6.1.6 Cylinder Material – gas cylinders/tanks in a position 150 mm or less from an exhaust system must meet one of the two:
- Made from metal
 - Meet the thermal protection requirements of **T.1.6.3**
- T.6.1.7 Cylinder Location - The gas cylinder/tank and the pressure regulator must be:
- a. Securely mounted inside the Chassis
 - b. Located outside of the Cockpit
 - c. In a position below the height of the Shoulder Belt Mount **T.2.6**
 - d. Aligned so the axis of the gas cylinder/tank does not point at the driver
- T.6.1.8 Protection – The gas cylinder/tank and lines must be protected from rollover, collision from any direction, or damage resulting from the failure of rotating equipment
- T.6.1.9 The driver must be protected from failure of the cylinder/tank and regulator

T.6.2 High Pressure Hydraulic Pumps and Lines

This section T.6.2 does not apply to Brake lines or hydraulic clutch lines

- T.6.2.1 The driver and anyone standing outside the vehicle must be shielded from any hydraulic pumps and lines with line pressures of 2100 kPa or higher.
- T.6.2.2 The shields must be steel or aluminum with a minimum thickness of 1 mm.

T.7 BODYWORK AND AERODYNAMIC DEVICES

T.7.1 Aerodynamic Devices

T.7.1.1 Aerodynamic Device

A part on the vehicle which guides airflow for purposes including generation of downforce and/or change of drag.

Examples include but are not limited to: wings, undertray, splitter, endplates, vanes

- T.7.1.2 No power device may be used to move or remove air from under the vehicle. Power ground effects are strictly prohibited.
- T.7.1.3 All Aerodynamic Devices must meet:
- a. The mounting system provides sufficient rigidity in the static condition
 - b. The Aerodynamic Devices do not oscillate or move excessively when the vehicle is moving. Refer to **IN.8.2**
- T.7.1.4 All forward facing edges that could contact a pedestrian (wings, end plates, and undertrays) must have a minimum radius of 5 mm for all horizontal edges and 3 mm for vertical edges.

This may be the radius of the edges themselves, or additional permanently attached pieces designed to meet this requirement.

T.7.1.5 Other edges that a person may touch must not be sharp

T.7.2 Bodywork

T.7.2.1 Conventionally designed Bodywork or a nose cone is not considered an Aerodynamic Device

T.7.2.2 Bodywork, a nose cone, or another component mounted to the vehicle is an Aerodynamic Device if is designed to, or may possibly, produce force due to aerodynamic effects

T.7.2.3 Bodywork must not contain openings into the cockpit from the front of the vehicle back to the Main Hoop or Firewall. The cockpit opening and minimal openings around the front suspension components are allowed.

T.7.2.4 All forward facing edges on the Bodywork that could contact people, including the nose, must have forward facing radii minimum 38 mm. This minimum radius must extend 45° or more relative to the forward direction, along the top, sides and bottom of all affected edges.

T.7.3 Measurement

T.7.3.1 All Aerodynamic Device limitations are measured:

- a. With the wheels pointing in the straight ahead position
- b. Without a driver in the vehicle

The intent is to standardize the measurement, see [GR.6.4.1](#)

T.7.3.2 Head Restraint Plane

A transverse vertical plane through the rearmost portion of the front face of the driver head restraint support, excluding any padding, set (if adjustable) in its fully rearward position

T.7.3.3 Rear Aerodynamic Zone

The volume that is:

- Rearward of the [Head Restraint Plane](#)
- Inboard of two vertical planes parallel to the centerline of the chassis touching the inside of the rear tires at the height of the hub centerline

T.7.4 Location

Any part of any Aerodynamic Device or Bodywork must meet [V.1.1](#) and [V.1.4.1](#)

T.7.5 Length

In plan view, any part of any Aerodynamic Device must be:

- a. No more than 700 mm forward of the fronts of the front tires
- b. No more than 250 mm rearward of the rear of the rear tires

T.7.6 Width

In plan view, any part of any Aerodynamic Device must be:

T.7.6.1 When forward of the centerline of the front wheel axles:

Inboard of two vertical planes parallel to the centerline of the chassis touching the outside of the front tires at the height of the hubs.

T.7.6.2 When between the centerlines of the front and rear wheel axles:

Inboard of a line drawn connecting the outer surfaces of the front and rear tires at the height of the wheel centers

T.7.6.3 When rearward of the centerline of the rear wheel axles:

In the **Rear Aerodynamic Zone**


T.7.7 Height

T.7.7.1 Any part of any Aerodynamic Device that is located:

- In the **Rear Aerodynamic Zone** must be no higher than 1200 mm above the ground
- Outside of the **Rear Aerodynamic Zone** must be no higher than 500 mm above the ground
- Forward of the centerline of the front wheel axles and outboard of two vertical planes parallel to the centerline of the chassis touching the inside of the front tires at the height of the hubs must be no higher than 250 mm above the ground

T.7.7.2 Bodywork height is not restricted when the Bodywork is located:

- Between the transverse vertical planes positioned at the front and rear axle centerlines
- Inside two vertical fore and aft planes 400 mm outboard from the centerline on each side of the vehicle

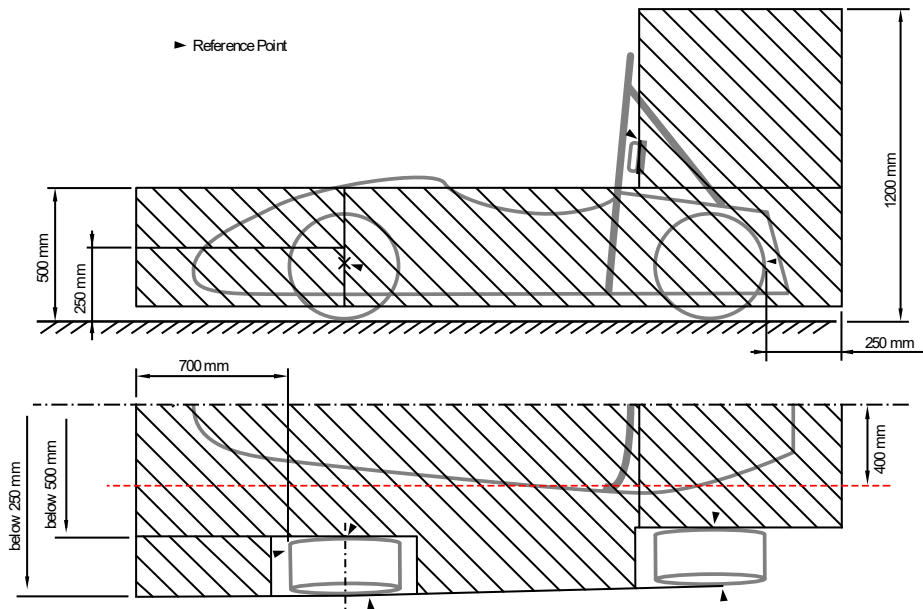

T.8 FASTENERS

T.8.1 Critical Fasteners

A fastener (bolt, screw, pin, etc) used in a location specified in the applicable rule

T.8.2 Critical Fastener Requirements

T.8.2.1 Any Critical Fastener must meet, at minimum, one of these:

- SAE Grade 5
- Metric Class 8.8
- AN/MS Specifications