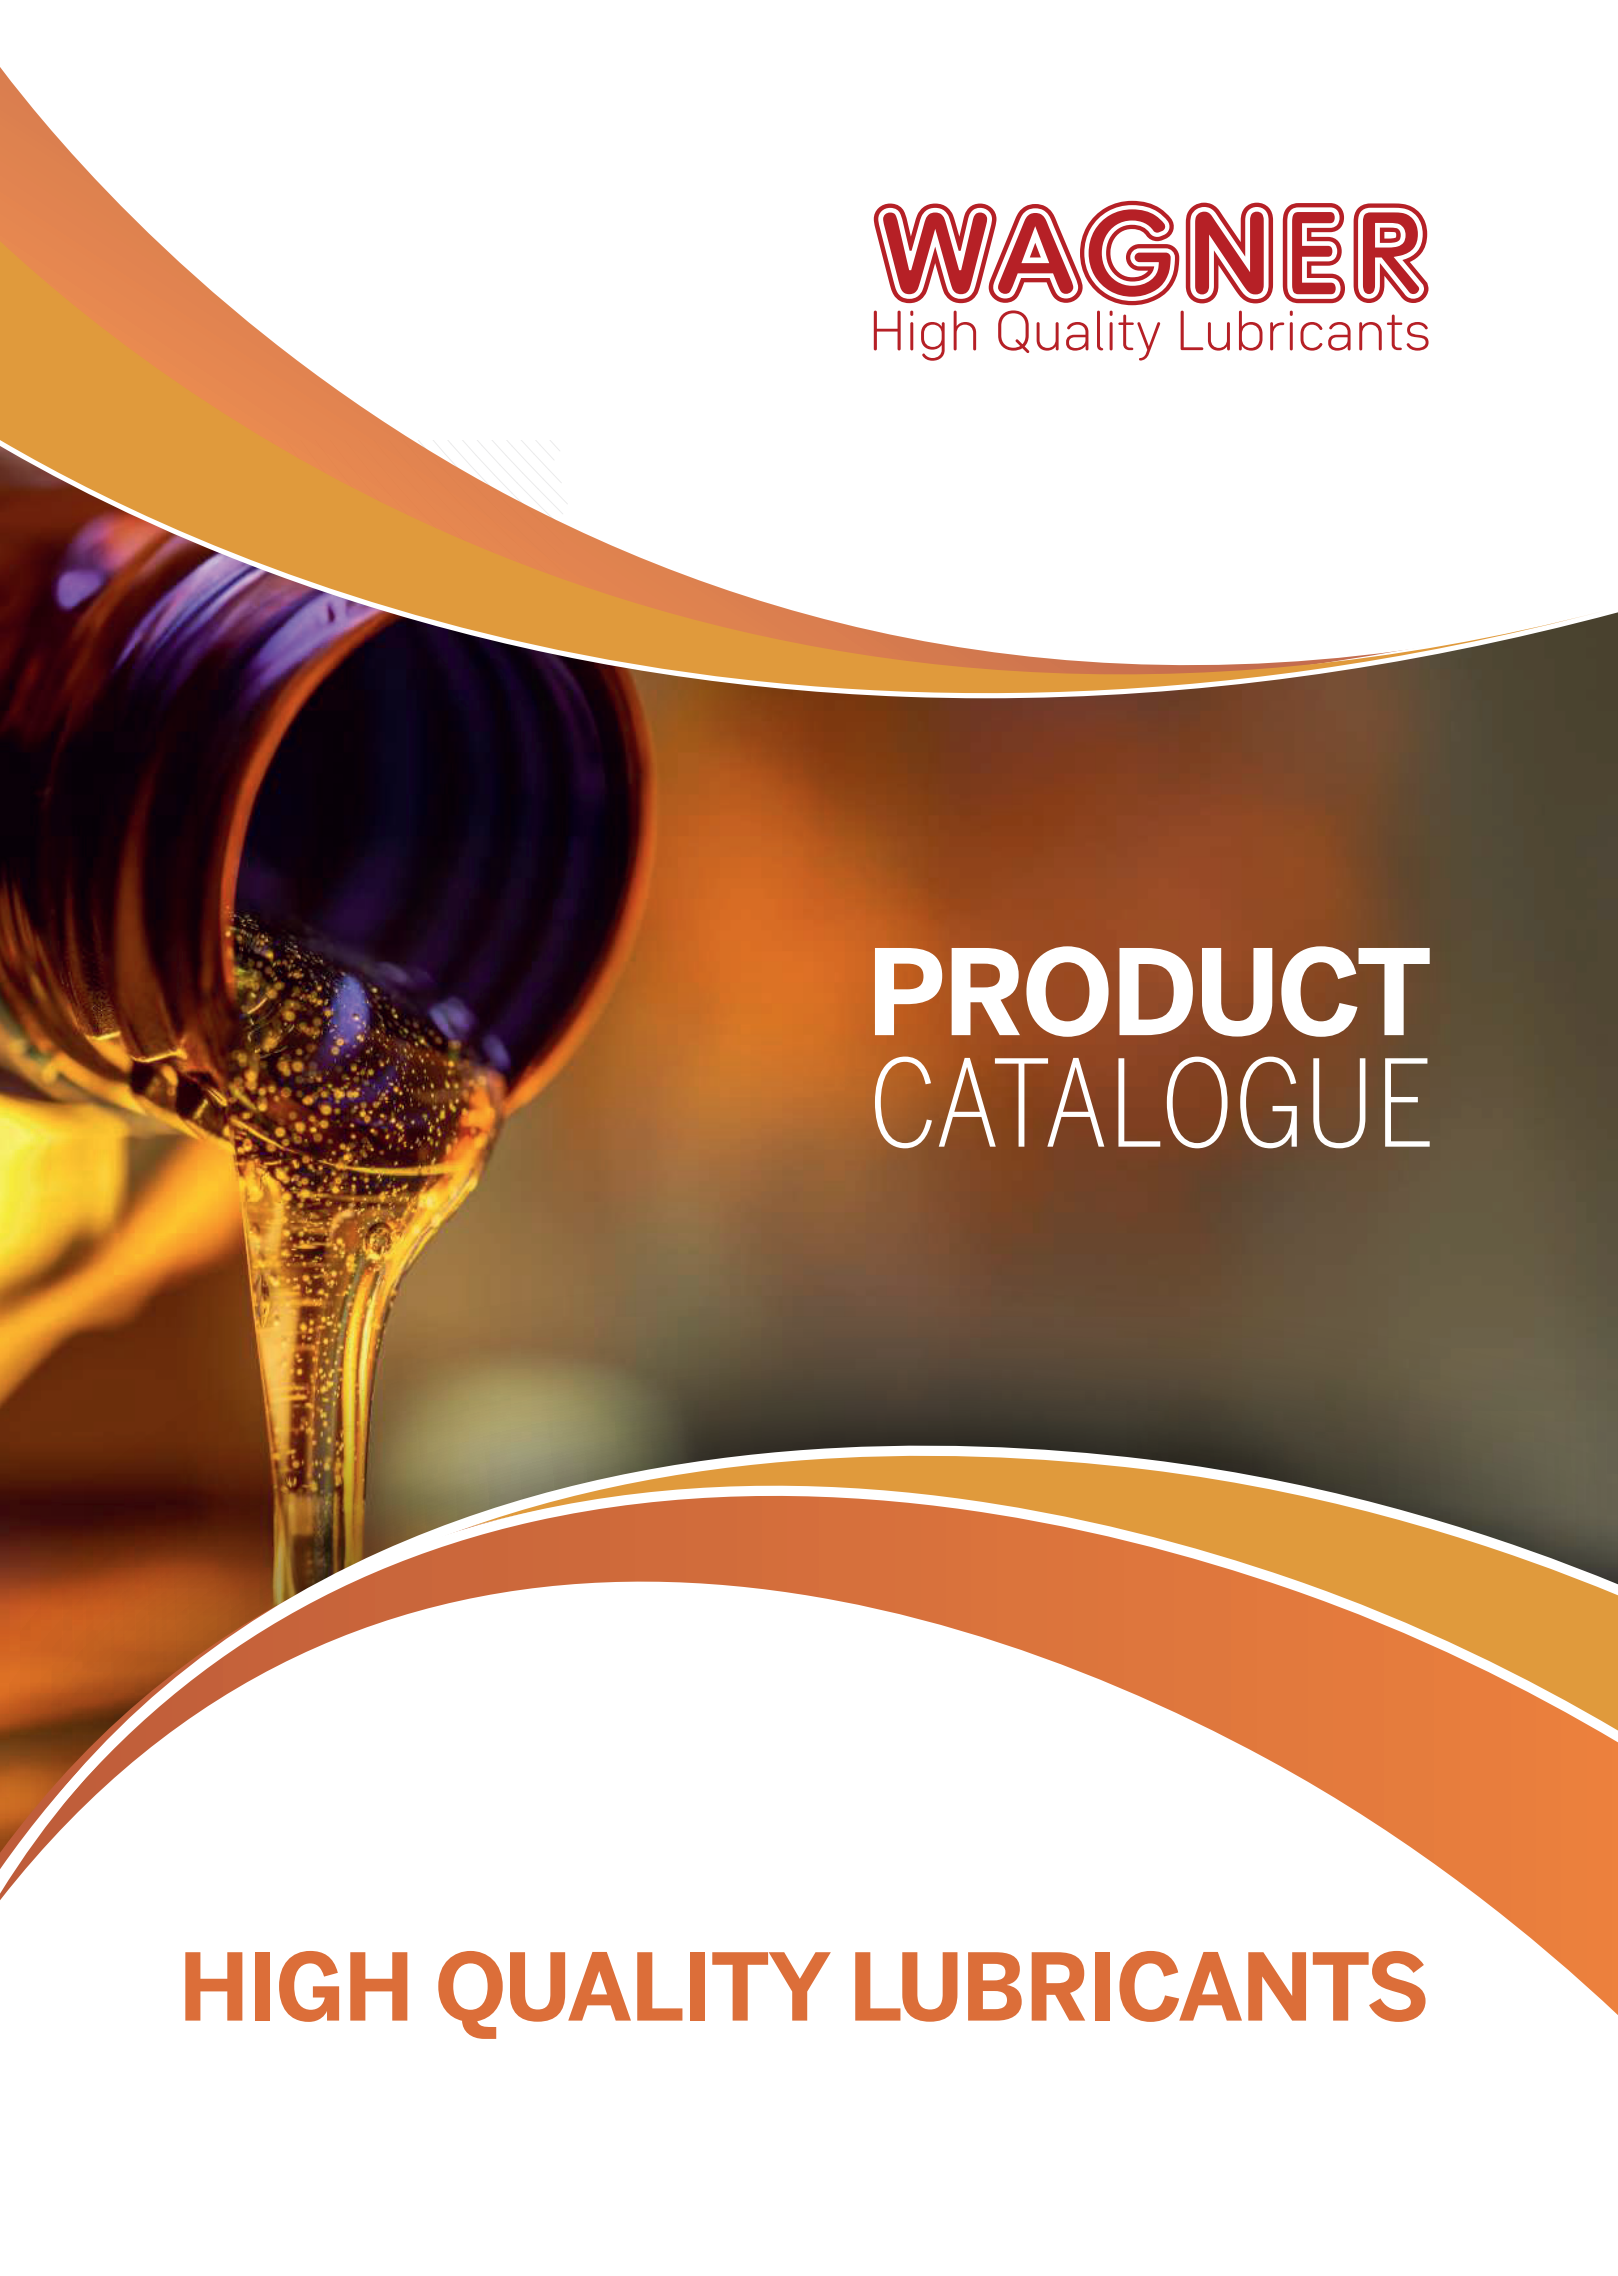


The background of the cover features a close-up photograph of a dark, metallic oil can being poured, with a thick stream of golden-brown oil falling. The image is framed by large, sweeping, curved bands in shades of orange and yellow. The Wagner logo is positioned in the upper right corner.

WAGNER
High Quality Lubricants

**PRODUCT
CATALOGUE**

HIGH QUALITY LUBRICANTS

“
*Almost anyone can think
up an idea. The thing
that counts is developing
it into a practical product.*

Henry Ford



Walter Wagner

President of
Wagner Spezialschmierstoffe
GmbH & Co. KG

Engineer

”
The automotive industry is now over 125 years old and the changing goals and ideas in this industry constantly generate new technology and innovation.

Today's machines and engines are excellent examples of the latest engineering. However, as they become more and more efficient and powerful, they have to work under increasingly tighter machining tolerances and higher temperatures, loads and pressures - all of which create the need to develop better wear protection.

In fact, the increasingly extreme working conditions in machines and engines create more wear than standard lubricants can effectively protect against. As temperatures, pressures, loads, and working tolerances push past old boundaries, the old standard approach to lubricants is no longer the most effective approach to proper lubrication.

As a result of new lubrication needs I, Walter Wagner, dedicated years of research and my own technical expertise to develop high quality engine oils. And now, I proudly present the Wagner lubricants line that meets and exceeds current requirements and reduces wear to the technically possible minimum.

As a mechanical engineer, I fully understand the operational demands that vehicles, heavy trucks and industrial plants have to withstand. For this reason my goal has always been to create a way to minimize wear and thus lower maintenance costs while increasing the efficiency of the machines to the maximum practical level. I have been following this vision for over 25 years, focusing on perfect vehicle and machine optimization through the best possible lubrication.

The hard work, dedication, and countless hours of research and development have yield the sophisticated high-performance lubricants and coolants in this brochure. They are proven to provide longer machine and vehicle service times, all while improving the performance through extreme friction and wear reduction.

In this brochure, I would like to give you an overview over my resulting products and enable you to enter the future of lubricants.

Yours sincerely

Walter Wagner

Overview





Evo MaX

Passenger Car Engine Oils




WAGNER EvoMaX - Gasoline SAE 0W-16 SP+ C5 GF-6B



Wagner SAE 0W-16 SP+ is an ultra-low viscosity, fully synthetic engine oil designed for modern fuel-efficient engines, particularly hybrid and downsized turbocharged engines. The advanced formulation meets the latest API SP Plus and ILSAC GF-6B specifications, providing enhanced fuel economy while ensuring superior wear protection and deposit prevention.

The low viscosity characteristic provides rapid lubrication during cold starts, reducing engine wear and improving overall performance.

WAGNER EvoMaX - Gasoline SAE 0W-20 SP+RC GF-6A

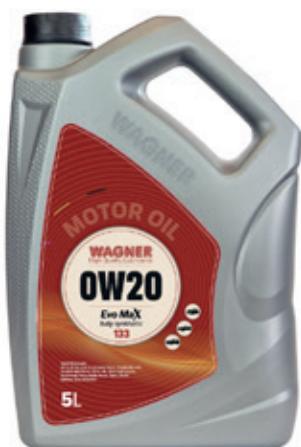

Wagner SAE 0W-20 SP+RC is a premium fully synthetic, resource-conserving engine oil designed to meet the highest performance standards of modern gasoline engines. This ultra-low viscosity oil provides exceptional fuel economy benefits while ensuring superior engine protection against wear, oxidation and deposit formation. Formulated to meet API SP and Resource Conserving (RC) specifications, it extends engine lifespan, prevents low speed pre-ignition (LSPI) and timing belt deterioration and optimizes thermal stability for extended drain intervals.

Application

Wagner SAE 0W-16 SP+ is specifically designed for modern gasoline-powered vehicles requiring ultra-low viscosity oils. It is particularly suited for hybrid vehicles, where optimizing fuel efficiency and maintaining thermal stability are crucial. The oil is also ideal for turbocharged gasoline direct injection (TGDI) engines, helping to prevent low-speed pre-ignition (LSPI) and ensuring long-term engine durability.

Properties

- » Greatly reduces internal friction & improves fuel efficiency
- » Provides superior wear protection even under extreme conditions
- » Prevents timing belt deterioration
- » Effectively prevents low-speed pre-ignition (LSPI)
- » Guarantees superior deposit prevention
- » Ensures quick oil circulation for optimal protection during cold starts

Approvals & Recommendations

API SP, SP Plus, ILSAC GF-6B, ACEA C5, MB 229.71, Toyota, Mazda, Ford, Honda

Packaging

Item N°

1L Plastic	EN136001
4L Plastic	EN136004
5L Plastic	EN136005
20L Plastic	EN136020
208L Drum	EN136200

Application

Wagner SAE 0W-20 SP+RC is specifically engineered for modern fuel-efficient gasoline engines, including hybrid and turbocharged direct injection (TGDI) engines. It is ideal for vehicles with latest fuel saving and emission prevention technology, providing superior protection against timing chain/belt wear and LSPI issues common in turbocharged engines.

Properties

- » Superior fuel economy and enhanced engine performance through greatly minimized friction
- » Superior wear protection according to the latest standards
- » Advanced Low-Speed Pre-Ignition (LSPI) and deposit prevention
- » Enhanced protection against timing belt deterioration
- » Optimal cold start performance and reduced startup wear through quick oil flow

Approvals & Recommendations

API SP, SP+RC, ILSAC GF-6A, Dexos 1 Gen 2, Chrysler MS-6395, Ford WSS-M2C 929-A/-B1/ 961-A, Toyota/Lexus, Kia/Hyundai, Honda, Mazda, Nissan, Subaru, Suzuki, Daihatsu, Isuzu, Mitsubishi

Packaging

Item N°

1L Plastic	EN133001
4L Plastic	EN133004
5L Plastic	EN133005
20L Plastic	EN133020
208L Drum	EN133200


WAGNER EvoMaX - Gasoline/Diesel
SAE 0W-20 SP+RC VW/Porsche


Wagner SAE 0W-20 VW/Porsche is a fully synthetic, ultra-low viscosity engine oil specifically developed to meet the stringent requirements of Volkswagen Group's latest engine technologies. The advanced formulation provides exceptional fuel economy benefits while offering superior wear protection and engine cleanliness. Designed for extended drain intervals, it ensures optimal performance and efficiency throughout the entire service interval in modern turbocharged gasoline and diesel engines.

WAGNER EvoMaX - Gasoline/Diesel
SAE 0W-30 SN C3


Wagner SAE 0W-30 SN C3 is a premium fully synthetic engine oil designed to meet the demanding API SN, Ford 950-A, JLR 03.5007, and GM Dexos 2 specifications. This quality oil provides enhanced fuel efficiency, advanced wear protection and optimal thermal stability for modern gasoline and diesel engines. Formulated with advanced additives, it prevents sludge formation, keeps the engine clean and supports extended drain intervals. The low-viscosity characteristics ensure smooth cold starts, reducing friction and wear even in extreme weather conditions.

Application

Formulated for Volkswagen, Audi, Porsche, and other vehicles requiring this specific approval. It is particularly suited for modern turbocharged gasoline direct injection (TGI) and diesel engines with particulate filters, ensuring low emissions and optimal fuel efficiency. The oil is ideal for vehicles designed with extended oil change intervals and those requiring advanced low-friction lubrication.

Properties

- » Optimized fuel efficiency and maximized engine performance
- » Advanced wear protection especially for modern engine technologies demanding the latest standards
- » Superior protection from Low Speed Pre-Ignition (LSPI) and timing belt deterioration
- » Mid SAPS & low ash for maximum deposit prevention and reduced emissions and optimal wear protection in cold conditions

Approvals & Recommendations

API SP+RC, ACEA C5,
ILSAC GF-6A,
VW 508.00 / 509.00,
Porsche C20

Packaging
Item N°

1L Plastic	EN137001
4L Plastic	EN137004
5L Plastic	EN137005
20L Plastic	EN137020
208L Drum	EN137200

Application

Wagner SAE 0W-30 SN C3 is suitable for a wide range of gasoline and diesel engines with modern exhaust after-treatment systems and particulate filters. It is ideal for engines up to the year 2020, helping to achieve maximum fuel efficiency while maintaining optimal performance. This oil is particularly beneficial for vehicles operating in cold climates, providing rapid lubrication and engine protection during startup.

Properties

- » Enhanced fuel efficiency and optimized performance through highly reduced internal friction
- » State-of-the-art wear protection even for high mileage engines
- » Mid SAPS and low ash prevent deposit buildup and reduce emissions
- » Excellent oxidation resistance and thermal stability ensure optimal lubrication throughout the entire service interval
- » Quick cold start lubrication in low temperatures for enhanced wear protection and easier startup

Approvals & Recommendations

API SN, ACEA C3,
Dexos 2, JLR 03.5007,
Ford 950-A,
BMW Longlife-4,
MB 229.51 / 229.52,
Porsche C30,
VW 504.00 / 507.00

Packaging
Item N°

1L Plastic	EN129001
4L Plastic	EN129004
5L Plastic	EN129005
20L Plastic	EN129020
208L Drum	EN129200



WAGNER EvoMaX - Gasoline SAE 5W-20 SP+RC GF-6A



Wagner SAE 5W-20 SP+RC is an advanced fully synthetic engine oil formulated to provide superior fuel economy, enhanced wear protection and optimal engine cleanliness. Meeting the latest & highest specifications, this low viscosity oil is designed for modern gasoline engines with or without turbocharging, direct injection and advanced emission control systems. It reduces internal friction, prevents low speed pre-ignition (LSPI) and extends engine life by offering outstanding thermal and oxidation stability and thus optimal lubrication over the entire service interval.

WAGNER EvoMaX - Gasoline SAE 5W-30 SP GF-6A Dexos 1 Gen 2



Wagner EvoMaX 5W-30 SP is a premium fully synthetic engine oil designed to deliver superior protection over a wide temperature range, enhanced fuel efficiency and outstanding engine cleanliness for modern gasoline-powered vehicles. Meeting the latest API SP and ILSAC GF-6A specifications, this advanced oil offers excellent wear protection, prevents low speed pre-ignition (LSPI) in turbocharged gasoline direct injection (TGDI) engines, protects from deposit buildup and ensures optimal performance over the entire service interval.

Application

Wagner SAE 5W-20 SP+RC is ideal for modern passenger cars, SUVs, and light-duty trucks requiring API SP and ILSAC GF-6A/B specifications. It is particularly recommended for gasoline engines with forced induction, direct injection (TGDI) and the latest exhaust after-treatment systems and filters, offering protection against LSPI and deposit formation. It is designed to the latest standards for fuel-efficient and eco-friendly engines that demand low-viscosity lubricants for optimal performance.

Properties

- » Superior fuel economy and performance
- » Advanced wear protection, especially for sensitive modern technologies
- » Optimal protection from Low Speed Pre-Ignition (LSPI)
- » Superior desposit prevention, maintains optimal engine cleanliness
- » Excellent oxidation and aging resistance
- » Quick cold start lubrication for easier startup and reduced wear in cold conditions short-haul use

Approvals & Recommendations

API SP, SP+RC, ILSAC GF-6A, Dexos 1 Gen 2, Chrysler MS-6395, Ford WSS-M2C 929-A / -B1 / 961-A, Toyota/Lexus, Kia/Hyundai, Honda, Mazda, Nissan, Subaru, Suzuki, Daihatsu, Isuzu, Mitsubishi

Packaging

Item N°

1L Plastic	EN131001
4L Plastic	EN131004
5L Plastic	EN131005
20L Plastic	EN131020
208L Drum	EN131200

Application

Wagner EvoMaX 5W-30 SP is recommended for use in a wide range of modern passenger cars, SUVs and light-duty trucks with advanced gasoline engines including forced induction, direct injection and latest exhaust after-treatment systems. It is particularly suited for vehicles from leading manufacturers, including Chrysler, Ford, Toyota/Lexus, Kia/Hyundai, Honda, Mazda, Nissan, Subaru, Suzuki, Daihatsu, Isuzu, Mitsubishi, GWM, Haval, and MG.

Properties

- » Reliable thermal stability even in extreme conditions
- » Advanced Low Speed Pre-Ignition (LSPI) protection
- » Superior oxidation, aging and deposit control for outstanding engine cleanliness
- » Optimized fuel economy, reducing emissions and operating costs
- » High-performance anti-wear additives for extended engine lifespan
- » Excellent cold start lubrication, minimizing startup wear

Approvals & Recommendations

API SP, ILSAC GF-6A, Dexos 1 Gen 2, Chrysler MS-6395, Ford WSS-M2C 929-A / -B1 / 961-A, Toyota/Lexus, Kia/Hyundai, Honda, Mazda, Nissan, Subaru, Suzuki, Daihatsu, Isuzu, Mitsubishi, GWM, Haval, MG

Packaging

Item N°

1L Plastic	EN132001
4L Plastic	EN132004
5L Plastic	EN132005
20L Plastic	EN132020
208L Drum	EN132200




WAGNER EvoMaX - Gasoline/Diesel SAE 5W-30 SP GF-6A



Wagner EvoMaX 5W-30 SP is a fully synthetic, high-performance engine oil designed to provide superior lubrication in all temperature conditions, best fuel efficiency and long-lasting engine protection. The advanced formulation meets API SP and ILSAC GF-6A specifications, ensuring excellent wear protection, improved stability and optimal deposit control. Modern gasoline and diesel engines benefit from superior low speed pre-ignition (LSPI) protection and exceptional engine cleanliness, helping extend the mechanical lifespan.

WAGNER EvoMaX - Gasoline/Diesel SAE 5W-40 SN A3/B4

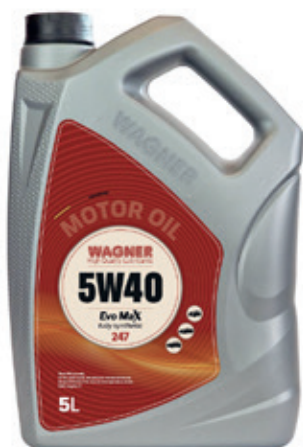

Wagner EvoMaX 5W-40 SN is a fully synthetic high-performance engine oil engineered to provide excellent protection and optimized performance for gasoline and diesel engines. Meeting API SN and ACEA A3/B4 standards, this oil delivers superior wear protection, deposit control and oxidation resistance, ensuring long-term stability for extended service intervals. It is designed to maintain optimal viscosity in extreme temperature conditions, making it suitable for high-performance, high temperature as well as everyday conditions.

Application

Wagner EvoMaX 5W-30 SP is suitable for a wide range of modern gasoline & diesel passenger cars and light commercial vehicles.

It is specifically formulated for the latest engine technologies like advanced forced induction, direct injection and exhaust after-treatment systems. This oil provides excellent performance in extreme temperature conditions, ensuring rapid lubrication during cold starts and superior engine protection at high temperatures.

Properties

- » Optimal oil film stability over a wide temperature range
- » Superior LSPI protection
- » Enhanced thermal and oxidation stability for consistent performance over extended service intervals
- » Superior protection from deposit buildup
- » Optimized for use with diesel (DPF) and gasoline (GPF) particulate filters
- » Enhanced fuel economy and optimal wear protection through reduced internal friction

Approvals & Recommendations

API SP, ILSAC GF-6A,
BMW LL-04,
MB 229.51,
Porsche C30,
VW 504.00 / 507.00

Packaging

Item N°

1L Plastic	EN245001
4L Plastic	EN245004
5L Plastic	EN245005
20L Plastic	EN245020
208L Drum	EN245200

Application

Suitable for a wide range of gasoline and diesel vehicles from the mid-90s to the present day.

Particularly compatible with turbocharged direct injection (TGD) engines and modern exhaust after-treatment systems, Wagner EvoMaX 5W-40 SN ensures outstanding engine protection, especially in high-performance and high temperature driving conditions.

Properties

- » Excellent thermal and oxidation stability for extended service intervals
- » Enhanced deposit control effectively prevents sludge and piston deposits
- » Enhanced LSPI protection
- » Outstanding high-temperature wear protection, especially for turbocharged engines
- » Very good seal and overall material compatibility
- » Ensures quick lubrication during cold starts

Approvals & Recommendations

API SN, ACEA A3/B4,
BMW Longlife-01,
MB 229.1/3/5,
Opel GM-LL-B-025,
Porsche A40,
Renault RN 0700/0710,
VW 502.00 / 505.00


Packaging

Item N°

1L Plastic	EN247001
4L Plastic	EN247004
5L Plastic	EN247005
20L Plastic	EN247020
208L Drum	EN247200




WAGNER EvoMaX - Gasoline/Diesel SAE 10W-30 SN A3/B4

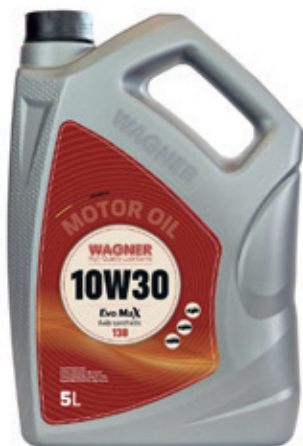

Wagner EvoMaX 10W-30 SN is a premium synthetic blend engine oil developed for heavily stressed gasoline and diesel engines. It meets API SN and ACEA A3/B4 standards, offering superior wear protection and excellent thermal stability in high-load, urban and commercial use conditions.

Its advanced additive system prevents sludge and deposit buildup, ensuring extended engine lifespan and reduced maintenance costs.

WAGNER EvoMaX - Gasoline/Diesel SAE 10W-40 SN A3/B4

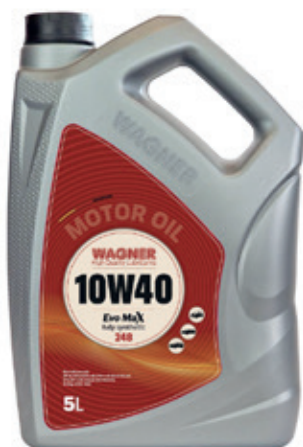

Wagner EvoMaX 10W-40 SN is a high-performance semi-synthetic engine oil formulated to provide excellent protection, enhanced engine cleanliness and improved thermal stability in high stress driving conditions. Meeting API SN and ACEA A3/B4 specifications, it ensures optimal wear protection, oxidation resistance and deposit buildup protection.

This oil maintains stable viscosity across a wide range of operating temperatures, making it suitable for high-performance gasoline and diesel engines as well as all compatible engines operated under high stress.

Application

Suitable for passenger cars and light commercial vehicles from the mid-90s to the present day, including full compatibility with latest direct injection and exhaust after-treatment systems. Wagner Evo MaX 10W-30 SN provides very good engine protection in high-temperature environments and under heavy load conditions, making it an ideal choice for urban and commercial driving.

Properties

- » Excellent thermal and oxidation stability
- » Enhanced deposit control effectively prevents sludge and piston deposits
- » Very good wear protection, especially in high-load conditions
- » Provides excellent oil film stability for turbocharged engines
- » Very good seal and overall material compatibility

Approvals & Recommendations

API SN, ACEA A3/B4,
MB 229.1/3,
PSA B71 2300,
Renault RN 0700/0710,
VW 502.00/505.00,
Jeep, Toyota

Packaging

Item N°

1L Plastic	EN138001
4L Plastic	EN138004
5L Plastic	EN138005
20L Plastic	EN138020
208L Drum	EN138200

Application

Wagner EvoMaX 10W-40 SN is ideal for passenger cars, SUVs and light commercial vehicles operated in high load and high temperature conditions. Compatible with both turbocharged and naturally aspirated engines as well as with modern direct injection and exhaust after-treatment systems. This oil provides consistent performance under extreme driving conditions and over prolonged service intervals.

Properties

- » Excellent thermal and oxidation resistance, preventing oil degradation
- » Outstanding engine cleanliness through optimized deposit control
- » Excellent wear protection in all driving conditions
- » Maintains viscosity stability under extreme temperatures
- » Excellent seal and overall material compatibility

Approvals & Recommendations

API SN, ACEA A3/B4,
MB 229.1/3,
PSA B71 2300,
Renault RN 0700/0710,
VW 501.01/505.00,
Wuling, Haval, GWM

Packaging

Item N°

1L Plastic	EN248001
4L Plastic	EN248004
5L Plastic	EN248005
20L Plastic	EN248020
208L Drum	EN248200



WAGNER EvoMaX - Gasoline SAE 0W-16 SN



WAGNER EvoMax SAE 0W-16 SN is formulated with high quality synthetic base oils and a highly advanced additive package in order to meet the high demands of modern downsized, small block high output gasoline engines. Provides outstanding control over the harmful effects of exhaust gas recirculation systems and effectively prevents low speed pre-ignition (LSPI) events, ensuring consistent oil performance over extended service intervals.

WAGNER EvoMaX - Gasoline SAE 0W-20 SN



WAGNER EvoMax SAE 0W-20 SN is a PAO (Polyalphaolefin) based, fully synthetic engine oil blended with the very latest additives, designed for modern downsized and high-output gasoline engines. The innovative formulation prevents harmful side-effects of modern engine technologies like corrosive wear through exhaust gas recirculation and effectively protects against low speed pre-ignition (LSPI) events while ensuring optimal oil performance over extended service intervals.

Application

Suitable for modern, gasoline powered passenger cars and light trucks especially from Japanese manufacturers, including those equipped with direct injection, forced induction and exhaust after-treatment systems. Particularly recommended to prevent low-speed pre-ignition (LSPI) issues, it offers exceptionally high shear stability and guarantees optimal performance in today's tough and demanding conditions.

Properties

- » Excellent engine cleanliness through advanced soot handling technology
- » Superior protection against corrosive wear helps sustaining engine durability
- » Excellent TBN retention helps countering harmful corrosive exhaust gases and extends oil life
- » Outstanding quick cold start lubrication
- » Suitable for all season use

Approvals & Recommendations

API SN,
Honda, Mazda, Nissan, Toyota

Packaging

Item N°

1L Plastic	EN128001
4L Plastic	EN128004
5L Plastic	EN128005
20L Plastic	EN128020
208L Drum	EN128200

Application

Suitable for modern, gasoline powered passenger cars and light trucks especially from Japanese manufacturers, including those equipped with direct injection, forced induction and exhaust after-treatment systems. Particularly recommended to prevent low-speed pre-ignition (LSPI) issues, it offers exceptionally high shear stability and guarantees optimal performance in today's tough and demanding conditions.

Properties

- » Excellent engine cleanliness through advanced soot handling technology
- » Superior protection against corrosive wear helps sustaining engine durability
- » Excellent TBN retention helps countering harmful corrosive exhaust gases and extends oil life
- » Outstanding quick cold start lubrication
- » Suitable for all season use

Approvals & Recommendations

API SN,
Daihatsu, Honda/Acura,
Hyundai/Genesis, Isuzu,
Kia, Mazda, Mitsubishi,
Nissan/Infiniti, Subaru,
Suzuki, Toyota/Lexus

Packaging

Item N°

1L Plastic	EN127001
4L Plastic	EN127004
5L Plastic	EN127005
20L Plastic	EN127020
208L Drum	EN127200



WAGNER EvoMaX - Gasoline/Diesel SAE 0W-30 SN/CF C2/C3



WAGNER EvoMaX SAE 0W-30 SN/CF C2/C3 is a fully synthetic longlife engine oil blended with latest technology and developed to meet the latest requirements for extended maintenance intervals. Specified for gasoline & diesel engines featuring forced induction, advanced direct injection and emission control systems. Effectively protects against wear, corrosion through exhaust gas recirculation and low speed pre-ignition (LSPI) events and provides optimal engine cleanliness and oil performance throughout even extended oil change intervals.

WAGNER EvoMaX - Gasoline SAE 0W-40 SN



WAGNER EvoMax SAE 0W-40 SN is a fully synthetic longlife engine oil for all season use. The careful combination of synthetic base oils and an advanced additive package meets the high demands of modern engine technologies, providing excellent wear protection and advanced deposit control together with consistent oil performance over extended oil change intervals. The low base viscosity index reduces friction, consumption and emissions while the advanced formulation effectively minimizes the risk of low speed pre-ignition (LSPI).

Application

Suitable for passenger vehicles with modern gasoline as well as diesel engines with or without forced induction, direct injection and exhaust after-treatment systems like DPF. Recommended for use when extended service intervals are required.

Properties

- » Excellent long-term stability for consistent oil performance
- » High shear stability prevents oil breakdowns
- » Excellent engine cleanliness through advanced deposit control
- » Mid-SAPS maintains exhaust after-treatment function and reduces emissions
- » Excellent wear and corrosion protection
- » Prevents low speed pre-ignition (LSPI) events
- » Ensures instant lubrication at cold start

Approvals & Recommendations

API SN/CF, **ACEA** C2/C3, **BMW** LL-04, **Chrysler** MS-11106, **Fiat** 9.55535 DS1/GS1, **Ford** WSS-M2C90-A, **MB** 229.51/52, **Porsche** C30, **PSA** B71 2300/2312, **Renault** RN 0700/0710, **VW** 504.00/507.00

Packaging

Item N°

1L Plastic	EN129001
4L Plastic	EN129004
5L Plastic	EN129005
20L Plastic	EN129020
208L Drum	EN129200

Application

Suitable for modern passenger vehicles with gasoline engines including technologies like advanced forced induction (turbocharger, supercharger etc.), intercooler, direct injection and emission control systems. Especially recommended for low speed pre-ignition (LSPI) prevention and when extended oil change intervals are required.

Properties

- » Excellent aging stability enables extended oil change intervals
- » High thermal and oxidation stability for consistent oil performance
- » Effective deposit control maintains optimum engine cleanliness
- » Excellent shear stability prevents oil breakdown under high load
- » Optimum wear protection at all temperatures
- » Very good cold start protection and excellent all season suitability

Approvals & Recommendations

API SN

Packaging

Item N°

1L Plastic	EN122001
4L Plastic	EN122004
5L Plastic	EN122005
20L Plastic	EN122020
208L Drum	EN122200



WAGNER EvoMaX - Gasoline SAE 5W-20 SN



WAGNER EvoMaX SAE 5W-20 SN is formulated with high quality synthetic base oil and a premium additive package. The low ash formula helps extend service life and maintain the efficiency of exhaust after-treatment systems in gasoline powered automobiles. This oil is suitable for use in carbureted, fuel injected, turbocharged and supercharged gasoline engines in both normal and extreme operating conditions.

WAGNER EvoMaX - Gasoline/Diesel SAE 5W-30 SN C3



WAGNER EvoMaX SAE 5W-30 SN is a high-performance, low-viscosity engine oil based on synthetic technology. The low ash formula helps extend the service life and maintain the efficiency of exhaust after-treatment systems in both diesel and gasoline powered automobiles. An advanced additive package ensures high lubrication film resistance and excellent wear protection in all operating conditions. Exceeds the highest test requirements demanded by renowned manufacturers.

Application

Suitable for modern passenger vehicles with gasoline engines including technologies like advanced forced induction (turbocharger, supercharger etc.), intercooler, direct injection and emission control systems. Especially recommended for low speed pre-ignition (LSPI) prevention and when extended oil change intervals are required.

Properties

- » High oil film adhesion and reliable lubrication under all conditions
- » Prevents deposits buildup and maintains outstanding engine cleanliness
- » Provides smooth operation and excellent wear protection through minimized friction
- » Reduces fuel consumption and pollutant emissions

Approvals & Recommendations

API SN

Packaging

Item N°

1L Plastic	EN126001
4L Plastic	EN126004
5L Plastic	EN126005
20L Plastic	EN126020
208L Drum	EN126200

Application

Developed to offer a reliable yet highly compatible lubrication solution for modern vehicles. Suitable for gasoline and diesel engines in passenger cars and light truck and compatible with all modern technologies like forced induction, high-pressure pump injection and advanced exhaust after-treatment systems.

Properties

- » Excellent oil film resistance and adhesion under all conditions ensures outstanding reliability
- » Very good protection against deposits buildup ensures perfect engine cleanliness and minimizes the risk of Low Speed Pre-Ignition (LSPI)
- » Helps maintain the efficiency of exhaust after-treatment systems in both diesel and gasoline vehicles
- » Universal viscosity index suitable for all season use

Approvals & Recommendations

API SN, ACEA C3,
Dexos 1 Gen 2,
BMW LL-04,
MB 229.51 / 52,
VW 505.00 / 505.1

Packaging

Item N°

1L Plastic	EN245001
4L Plastic	EN245004
5L Plastic	EN245005
20L Plastic	EN245020
208L Drum	EN245200



WAGNER EvoMaX - Gasoline/Diesel SAE 5W-30 SN/CF A3/B4



WAGNER EvoMaX SAE 5W-30 SN/CF A3/B4 is a high-tech synthetic all-season, low-friction motor oil. Super Low-Friction was developed for the toughest requirements of modern, high performance gasoline & diesel engines without extended maintenance intervals. Tested for use with catalytic converters and forced inductions. Saves fuel and provides optimal wear protection. The formulation has a fibenecial effect on sealing materials and thus on the leaktightness of engines.

WAGNER EvoMaX - Gasoline SAE 5W-30 SN/CF



WAGNER EvoMaX SAE 5W30 SN/CF is a first class modern low-friction engine oil with wide compatibility for year-round use. The combination of unconventional hydrocracked base oils and the latest additive technology guarantees reduced and fuel consumption & emissions through low base viscosity while ensuring outstanding oil film strength even at high temperatures and loads for optimum protection against wear and turbocharger failure. The material-fienly formula maintains seals and prevents leaks.

Application

Advanced and reliable choice for a wide range of passenger cars, light trucks and commercial vehicles equipped with gasoline and diesel engines alike. Ensures full compatibility with conventional as well as modern technologies like advanced forced induction, high-pressure pump injection, catalytic converters and particulate filters. Ideal all-round capabilities for year-round use.

Properties

- » Excellent oil film strength and shear resistance for maximum reliability
- » Advanced sludge control ensures optimum engine cleanliness and constant performance
- » Highly reduced friction prevents wear and helps reduce fuel consumption and emissions
- » High material compatibility, maintains seals and prevents leakage
- » Perfectly maintains the efficiency of exhaust after-treatment systems and particulate filters

Approvals & Recommendations

API SN/CF, **ACEA** A3/B4,
BMW LL-01,
MB 229.5/3/1,
Porsche A40,
PSA B71 2296,
Renault RN 0700/0710,
VW 502.00/505.00/503.1

Packaging

Item N°

1L Plastic	EN246001
4L Plastic	EN246004
5L Plastic	EN246005
20L Plastic	EN246020
208L Drum	EN246200

Application

Sensible choice for a wide range of gasoline powered passenger cars and light trucks from the late 90ies to the present day. Provides full compatibility with all modern engine technologies like advanced forced induction, direct injection and emission control systems with particulate filters.

Properties

- » High shear stability and overall film resistance and adhesion
- » Outstanding deposits control for perfect engine cleanliness
- » Provides excellent wear protection, especially for turbochargers
- » High material compatibility maintains seals and prevents leakage
- » Reduces friction, fuel consumption & emissions
- » Reliable under all temperature conditions

Approvals & Recommendations

API SN/CF

Packaging

Item N°

1L Plastic	EN123001
4L Plastic	EN123004
5L Plastic	EN123005
20L Plastic	EN123020
208L Drum	EN123200


WAGNER EvoMaX - Gasoline/Diesel
SAE 5W-40 SN/CF A3/B4


WAGNER EvoMaX SAE 5W-40 SN/CF A3/B4 is a high-tech wide-viscosity engine oil based on synthetic technology with advanced wear-protection, deposit control and stability additives. Provides optimum lubrication and protection over a wide range of temperature and load conditions without degradation, ensuring consistent performance over extended service intervals while minimizing deposit & sludge buildup for outstanding engine cleanliness.

WAGNER EvoMaX - Gasoline
SAE 5W-40 SN


WAGNER EvoMaX SAE 5W-40 SN is a high-tech, fully synthetic engine oil with improved stability and wear protection formula. Reduces oil thickening from particulate drag-in and provides excellent aging & oxidation resistance for optimum performance over the entire drain interval. The carefully compiled additive packages ensures outstanding engine cleanliness while maintaining full compatibility to common seal materials and provides the best possible wear protection for engine and any turbochargers. Exceeds the highest test requirements demanded by Asian manufacturers.

Application

Suitable for all common types of passenger vehicles, SUVs and light trucks with gasoline & diesel engines from the mid-90s to the present day. Compatible with latest engine technologies like advanced forced induction, direct injection and emission control systems. Provides reliable lubrication for everyday use even in extreme load and temperature conditions.

Properties

- » Exceptional shear stability prevents oil film breakdown
- » Superior thermal and oxidation stability ensures optimum oil performance over extended drain intervals
- » Excellent wear protection in all load and temperature conditions
- » Superior deposit & sludge control for optimum engine cleanliness
- » Suitable for economic all season use

Approvals & Recommendations

API SN/CF, **ACEA** A3/B4,
BMW LL-01,
MB 229.3/229.5/226.5
Porsche A40,
PSA B71 2296,
Renault RN 0700/0710,
VW 502.00/505.00

Packaging
Item N°

1L Plastic	EN247001
4L Plastic	EN247004
5L Plastic	EN247005
20L Plastic	EN247020
208L Drum	EN247200

Application

For all common types of passenger cars, light trucks and utility vehicles with gasoline engines from the 90s to the present day. Compatible with all modern engine and exhaust after-treatment technologies like advanced forced induction, high-pressure pump injection and particulate filters. Reliable choice for vehicles operated in high temperature and high stress conditions.

Properties

- » Excellent aging and oxidation resistance
- » Very high shear and overall oil film stability at high temperatures
- » Optimum sludge & deposit control ensures outstanding engine cleanliness
- » Excellent wear protection, prevents turbocharger failure
- » Suitable for use in all temperature conditions

Approvals & Recommendations

API SN

Packaging
Item N°

1L Plastic	EN124001
4L Plastic	EN124004
5L Plastic	EN124005
20L Plastic	EN124020
208L Drum	EN124200



WAGNER EvoMaX - Gasoline/Diesel SAE 10W-40 SN A3/B3



WAGNER EvoMaX 10W-40 SN A3/B4 is a wide viscosity range multigrade engine oil for gasoline and diesel engines requiring API SN performance under all operating conditions. This oil is formulated based on high viscosity index mineral oil blended with latest additive technology, fisher stable polymers and efficient detergents. Designed as a top-tier mixed-fleet semi-synthetic multigrade engine oil suitable for use in a wide range of heavy duty diesel and gasoline engines. A sensible choice that meets the latest ACEA and API performance levels.

WAGNER EvoMaX - Gasoline SAE 10W-40 SN



WAGNER EvoMaX SAE 10W-40 SN is a high-tech semi-synthetic low-friction engine oil for all season use. Developed for the toughest requirements of modern traffic on high-performance gasoline engines without extended maintenance intervals. The excellent lubrication film stability ensures optimum wear protection in all operation conditions while the distinct deposit control components maintain perfect engine cleanliness and catalytic converter efficiency. Helps reduce fuel consumption, emissions and service costs and ensures extended seal lifespan.

Application

Premium quality engine oil developed for supercharged, gasoline powered passenger cars and diesel powered light duty vehicles from the mid-90s to the present day. Suitable for a wide range of vehicles (cars, light SUVs, vans and light trucks) from European and other manufacturers. Compatible with all advanced gasoline & diesel engine technologies like forced induction, high-pressure injection and modern catalytic converters except not recommended for use in vehicles with particulate filters.

Properties

- » Outstanding thermal stability at high temperature
- » Distinctive resistance to aging and oxidation
- » Well balanced sludge & deposit control ensures optimum engine cleanliness
- » Excellent wear protection
- » Particularly suitable for hot regions and high load operation

Approvals & Recommendations

API SN, ACEA A3/B4,
BMW LL-01,
MB 229.3/229.5/226.5,
Porsche A40,
PSA B71 2296,
Renault RN 0700/0710,
VW 502.00/505.00

Packaging

Item N°

1L Plastic	EN248001
4L Plastic	EN248004
5L Plastic	EN248005
20L Plastic	EN248020
208L Drum	EN248200

Application

Reliable high quality allround engine oil suitable for a wide range of gasoline powered passenger cars and light trucks from the mid-90s to the present day. Ensure full compatibility with modern technologies like advanced forced induction, high-pressure pump injection and most emission control systems except particulate filters. Recommended for high mileage vehicles and in high temperature and load conditions.

Properties

- » Excellent resistance to aging & oxidation for consistent performance over the entire drain interval
- » High shear stability and outstanding oil film strength prevent oil breakdowns
- » Carefully balanced sludge & deposit control ensures engine cleanliness over long periods
- » High material compatibility maintains seal integrity and prevents oil leaks
- » Provides reliable lubrication even in extreme conditions

Approvals & Recommendations

API SN

Packaging

Item N°

1L Plastic	EN121001
4L Plastic	EN121004
5L Plastic	EN121005
20L Plastic	EN121020
208L Drum	EN121200



WAGNER EvoMaX - Gasoline SAE 10W-60 SN Racing



WAGNER EvoMaX SAE 10W-60 SN is a fully synthetic high-performance engine oil for extreme operating conditions and race track events. Formulated with high viscosity index synthetic base oil blended with latest high-performance additive technology, shear stable polymers and efficient detergents, it provides maximum engine protection under highest loads and extreme operating condition. Highly recommended for the performance versions of all major manufacturers like BMW's M-line, Mercedes AMG etc.

Application

Especially formulated for track day and racing events and forced driving of high performance gasoline powered cars with and without forced induction. Particularly suitable for extreme engine requirements and racing as well as for use in all gasoline powered vehicles with or without TWC and forced induction operated under high load and/or at high speeds. Fully compatible with advanced forced induction and high-pressure pump injection systems.

Properties

- » Extreme high temperature & stress stability
- » Outstanding shear resistance and oil film adhesion
- » Untamed wear protection for engine & forced induction components
- » Excellent deposit control ensures perfect engine cleanliness and prevents buildups on high loads

Approvals & Recommendations

API SN

Packaging

Item N°

1L Plastic	EN120001
4L Plastic	EN120004
5L Plastic	EN120005
20L Plastic	EN120020
208L Drum	EN120200

WAGNER EvoMaX - Gasoline SAE 15W-40 SL



WAGNER EvoMaX 15W-40 SL is a carefully compiled high quality mineral based allround engine oil with innovative modern additive package providing maximum compatibility with a wide range of gasoline & diesel engines from the early 1990s to the present day. The high temperature & aging stability together with excellent wear protection and deposit control makes it a reliable choice for passenger cars, light trucks and commercial vehicles operated under high stress and high mileage conditions.

Application

Developed to deliver the performance required by the latest specifications while ensuring full compatibility with gasoline & diesel powered vehicles dating back to the early 1990s. Also fully compatible with modern technologies like advanced forced induction, high-pressure pump injection and catalytic systems. Highly recommended for mid-aged high mileage gasoline & diesel engines as well as for use in commercial short-haul high stress driving.

Properties

- » Stable and shear resistant lubrication film offers excellent protection against oil breakdown
- » High temperature, aging and oxidation stability
- » Excellent wear resistance
- » Excellent material compatibility maintains seal integrity and prevents oil leaks
- » Effectively prevents black sludge & deposits

Approvals & Recommendations

API SL

Packaging

Item N°

1L Plastic	EN130001
4L Plastic	EN130004
5L Plastic	EN130005
20L Plastic	EN130020
208L Drum	EN130200

**WAGNER EvoMaX - Gasoline**
SAE 20W-50 SL

WAGNER EvoMaX 20W-50 SL is a premium high-performance mineral based engine oil carefully blended with innovative modern additives providing maximum compatibility with a wide range of gasoline & diesel engines from the early 1990s to the present day. The high temperature & aging stability together with excellent wear protection and deposit control makes it a reliable choice for passenger cars, light trucks and commercial vehicles operated under high stress in hot conditions.

Application

Developed to deliver the performance required by the latest specifications while ensuring full compatibility with gasoline powered vehicles dating back to the early 1990s. Also fully compatible with modern technologies like advanced forced induction, high-pressure pump injection and catalytic systems, but not recommended for use in conjunction with particulate filters.

Especially suitable for use in mid-aged high performance gasoline engines and when constantly operating in high temperature and extreme stress conditions.

Properties

- » Outstanding thermal stability ensures highest possible protection from oil breakdown
- » Excellent aging and oxidation resistance provides consistent performance over the entire drain interval
- » Optimum wear protection
- » Effectively prevents black sludge & deposits
- » Excellent material compatibility maintains seal integrity and prevents oil leaks

Approvals & Recommendations

API SL

Packaging**Item N°**

1L Plastic	EN125001
4L Plastic	EN125004
5L Plastic	EN125005
20L Plastic	EN125020
208L Drum	EN125200



CargoX

Heavy Duty Vehicles



WAGNER CargoX - Diesel SAE 20W-50 CI-4 E7



Wagner CargoX 20W-50 CI-4 is a robust, high-viscosity engine oil designed for use in heavy-duty diesel engines operated under extreme temperature and high-load conditions. This oil provides superior protection against wear, deposits and thermal breakdown, ensuring long-lasting performance and engine reliability.

The high viscosity makes it particularly effective in maintaining a strong lubricating film, even in the most demanding operating environments.

WAGNER CargoX - Diesel SAE 15W-40 CI-4 E7



Wagner CargoX 15W-40 CI-4 is a heavy-duty engine oil engineered to provide robust protection and performance in diesel engines operating under severe conditions. Formulated as a blend of high-quality base oils and advanced additive technology, this oil offers exceptional wear protection, deposit control and thermal stability. Designed to meet the demanding requirements of modern diesel engines, including those with advanced emission control systems.

Application

Wagner CargoX 20W-50 CI-4 is ideal for use in high-output diesel engines operating in severe service conditions, such as those found in long-haul trucking, mining and construction. The high viscosity provides excellent protection in high temperature and heavy load conditions, making it a reliable choice for all demanding applications.

Properties

- » Exceptional high-temperature stability ensures reliable protection in extreme conditions
- » Enhanced oil film strength provides consistent lubrication under heavy loads
- » Superior protection against wear and deposits extends service life and reduces downtime
- » Allows for extended service intervals, reducing maintenance costs and improving operational efficiency

Approvals & Recommendations

API CI-4, **ACEA** E7, **JASO** DH-1
Cummins CES 20076/77/78,
Detroit Diesel DDC 93K215,
Deutz DQC III-18,
Mack EO-N, **MAN** M 3275,
MB 228.3 / 229.1
Renault trucks RLD-2,
Volvo VDS-3

Packaging

Item N°

1L Plastic	EN282001
4L Plastic	EN282004
5L Plastic	EN282005
20L Plastic	EN282020
208L Drum	EN282200

Application

Wagner CargoX SAE 15W-40 CI-4 is suitable for use in a wide range of heavy-duty diesel engines, particularly those in commercial vehicles, trucks, buses and construction equipment. Compatible with engines equipped with exhaust gas recirculation (EGR) and diesel particulate filters (DPF), making it a versatile choice for modern diesel fleets.

Properties

- » Excellent wear protection for extended service life
- » Enhanced oil film strength for reliable lubrication under high-stress conditions
- » Outstanding resistance to oil degradation allows for extended oil change intervals
- » Ensures superior engine cleanliness for optimum efficiency over long service intervals

Approvals & Recommendations

API CI-4, **ACEA** E7, **JASO** DH-1
Cummins CES 20076/77/78,
Detroit Diesel DDC 93K215,
Deutz DQC III-18,
Mack EO-N, **MAN** M 3275,
MB 228.3 / 229.1
Renault trucks RLD-2,
Volvo VDS-3

Packaging

Item N°

1L Plastic	EN281001
4L Plastic	EN281004
5L Plastic	EN281005
20L Plastic	EN281020
208L Drum	EN281200



WAGNER CargoX - Diesel
SAE 10W-40 CI-4 E7



Wagner CargoX 10W-40 API CI-4 is a high-performance synthetic blend engine oil designed for use in modern, high-output diesel engines. The carefully compiled formula provides exceptional protection and performance in both on-road and off-road applications, making it ideal for use in commercial vehicles, delivery trucks etc.

Its advanced additive technology ensures excellent control over soot, wear and deposits, helping to extend service life and reduce maintenance costs.

Application

Wagner CargoX SAE 10W-40 CI-4 is suitable for use in a wide range of light- to heavy-duty, high-output diesel engines, particularly those in commercial vehicles, delivery trucks etc. Compatible with engines equipped with exhaust gas recirculation (EGR) and diesel particulate filters (DPF), making it a versatile choice for modern diesel fleets.

Properties

- » Excellent wear protection for extended service life
- » Robust oil film strength for reliable lubrication under high-stress conditions
- » Excellent resistance to oil degradation ensures constant performance and allows for extended oil change intervals
- » Provides superior sludge & deposit control for optimum engine cleanliness and efficiency over long service intervals

Approvals & Recommendations

API CI-4, **ACEA** E7, **JASO** DH-1
Cummins CES 20076/77/78,
Detroit Diesel DDC 93K215,
Deutz DQC III-18,
Mack EO-N, **MAN** M 3275,
MB 228.3 / 229.1
Renault trucks RLD-2,
Volvo VDS-3

Packaging

Item N°

1L Plastic	EN280001
4L Plastic	EN280004
5L Plastic	EN280005
20L Plastic	EN280020
208L Drum	EN280200



MotoX

Two & Four Stroke Motorcycles
Engine Oils

WAGNER MotoX - Gasoline SAE 10W-40 SN MA-2



WAGNER MotoX SAE 10W-40 SN MA-2 is perfectly adapted to the requirements of four-stroke motorcycle engines. It provides high thermal stability while its base viscosity grade facilitates engine start-up at all temperatures.

The carefully compiled formula maintains optimum lubrication and engine protection under high RPM and high temperature conditions and prevents black sludge and deposits, thus extending service life and reducing costs.

WAGNER MotoX - Gasoline SAE 10W-50 SN MA-2



WAGNER MotoX 4T SAE 10W-50 SN MA-2 is specially developed for high-output 4-stroke motorbike engines. The high quality synthetic base provides high thermal stability and easy engine start at all temperatures.

Blended with latest high-performance additive technology it maintains optimum lubrication and engine protection in high RPM and high temperature conditions while providing effective deposit control for uncompromised engine cleanliness and longlasting performance.

Application

Developed for air and water-cooled 4-stroke engines exposed to average to tough operating conditions. Suitable for engines with or without wet clutch. Provides excellent performance in extreme riding - quick oil flow and strong lubricating film ensure reliable wear protection in all operating conditions. The balanced friction control provides maximum performance for engine and wet clutch.

Properties

- » Outstanding lubricating film stability & adhesion
- » Optimized friction capacity
- » Effective sludge & deposit control for optimum engine cleanliness
- » High level of wear protection
- » Very good damping properties

Approvals & Recommendations

API SN
JASO MA-2

Packaging

Item N°

1L Plastic	EN260001
4L Plastic	EN260004
5L Plastic	EN260005
20L Plastic	EN260020
208L Drum	EN260200

Application

Developed for air- and water-cooled high-output 4-stroke engines exposed to average to tough operating conditions and suitable for engines with or without wet clutch. Delivers highly reliable lubrication performance in extreme riding - optimal oil flow and outstanding lubricating film strength protect from wear even in forced driving while supreme sludge & deposit control ensures perfect engine cleanliness.

Properties

- » Especially suitable for wet clutches.
- » Uncompromising lubrication reliability even in forced operating conditions
- » Excellent shear stability
- » Optimized wear protection for engine & clutch
- » Effective sludge & deposit control for maximum engine cleanliness and constant performance

Approvals & Recommendations

API SN
JASO MA-2

Packaging

Item N°

1L Plastic	EN263001
4L Plastic	EN263004
5L Plastic	EN263005
20L Plastic	EN263020
208L Drum	EN263200

WAGNER MotoX - Gasoline SAE 10W-60 SN MA-2



WAGNER MotoX 4T SAE 10W60 SN MA-2 is a superior, synthetic based engine oil especially adapted to highest demands of performance 4-stroke motorcycle engines. The wide and rockstable viscosity capacity provides outstanding thermal stability and highly reliable lubrication even in the toughest operation conditions. Blended with a supreme additive package providing the best possible wear protection for engine & clutch and outstanding sludge & deposit control, this oil delivers untamed performance for the most challenging use cases.

WAGNER MotoX - Gasoline SAE 15W-40 SL MA-2



WAGNER MotoX 4T SAE 15W-40 SL MA-2 is a multipurpose motorcycle engine oil based on selected high quality mineral oils. Ensures optimum performance and protection under all operating conditions. Reliable lubrication, optimum noise damping, low wear and smooth clutch & shifting operation make it a sensible choice for average everyday use in medium-output motorcycles.

Application

Developed for high-performance air and water-cooled 4-stroke engines exposed to racing events and tough operating conditions and suitable for engines with or without wet clutch. Provides ultimate performance for demanding rides, track days and racing events through outstanding thermal stability, maximum lubricating film strength and excellent wear protection. Perfectly balanced friction properties and superior deposit control effectively protect engine & clutch.

Properties

- » Especially suitable for wet clutches.
- » Untamed thermal & shear stability even in extreme driving conditions
- » Outstanding wear protection for engine & clutch
- » Maximum protection from sludge, deposits and performance drop
- » Enables forced performance riding without risking lifespan

Approvals & Recommendations

API SN
JASO MA-2

Packaging

Item N°

1L Plastic	EN267001
4L Plastic	EN267004
5L Plastic	EN267005
20L Plastic	EN267020
208L Drum	EN267200

Application

The sensible choice for reliable and relaxed everyday riding. Developed for air- and water-cooled 4-stroke motorcycles operated in average conditions and suitable for both, engines with and without wet clutch. Exceptional lubrication film strength, well balanced friction properties supporting wet clutches, very good wear protection and excellent deposit control make an excellent oil for a wide range of medium-output bikes.

Properties

- » Especially suitable for wet clutches
- » Reliable & strong lubrication film with optimum adhesion and thermal stability
- » Well balanced friction properties provides optimum wear protection for engine & clutch alike
- » Ensures excellent engine & clutch system cleanliness
- » Distinct damping properties

Approvals & Recommendations

API SL
JASO MA-2

Packaging

Item N°

1L Plastic	EN269001
4L Plastic	EN269004
5L Plastic	EN269005
20L Plastic	EN269020
208L Drum	EN269200

WAGNER MotoX - Gasoline SAE 20W-50 SL MA-2



WAGNER MotoX 4T SAE 20W-50 SL is a mineral based high-performance 4-stroke engine oil with outstanding thermal stability. The carefully formulated blend ensures maximum lubricating film stability and adhesion, especially when frequently using power and operating at high temperatures. The high base viscosity index enables very well balanced friction properties and provides optimum wear protection for engine & clutch under all operating conditions.

WAGNER MotoX - Gasoline 2T API TC / JASO FD



WAGNER MotoX 2T API TC / JASO FD is a 2-stroke engine oil for small displacement motorcycles formulated with high quality mineral base oils combined with a carefully balanced additive package to achieve the best possible lubrication reliability and wear protection while ensuring residue-free combustion for engine & exhaust cleanliness and reduced emissions. Suitable for general everyday use.

Application

Developed for air- and water-cooled 4-stroke motorcycle engines with or without wet clutch operated at higher temperatures or only during summer. The superior thermal & shear stability that provides excellent protection even at high temperatures and RPMs makes it the perfect choice for drivers who frequently call on the power during seasonal use. Suitable for average to high-performance motorcycles.

Properties

- » Superior thermal & shear stability combined with reliable lubricating film adhesion
- » Well balanced friction properties provide optimum wear protection for engine & clutch
- » Excellent damping properties
- » Enhanced clutch & shifting operations
- » Optimized sludge & deposit control ensures longterm engine cleanliness

Approvals & Recommendations

API SL
JASO MA-2

Packaging

Item N°

1L Plastic	EN266001
4L Plastic	EN266004
5L Plastic	EN266005
20L Plastic	EN266020
208L Drum	EN266200

Application

Riding a small displacement 2-stroke motorcycle? This is your oil - developed for air- and water-cooled 2-stroke engines with both, mixed and separate lubrication systems. Provides reliable lubrication and best possible wear protection in all operation conditions while ensuring residue-free combustion for longterm cleanliness of engine and exhaust system. Suitable for the most modern as well as for older 2-stroke engines.

Properties

- » Outstanding lubricating capability
- » Excellent shear resistance
- » Reliable wear protection under all thermal and operating conditions
- » Highly clean combustion maintains engine & exhaust cleanliness
- » Reduces emissions and extends service life

Approvals & Recommendations

API TC
JASO FD

Packaging

Item N°

1L Plastic	EN268001
4L Plastic	EN268004
5L Plastic	EN268005
20L Plastic	EN268020
208L Drum	EN268200



Bobber
by **WAGNER**
High Quality Lubricants

Specialized Products for
V-TWIN Engines

BOBBER V-Twin Oil SAE 20W-50 fully synthetic



BOBBER SAE 20W-50 fully synthetic V-Twin Oil is a specialized, carefully compiled motorcycle engine oil providing high thermal stability and lubricating film strength in hot conditions through its high base viscosity grade and high temperature resistance.

Developed to address the specific issues of V-Twins, it offers outstanding protection from thermal failure of the rear cylinder, excellent damping properties and ensures perfect engine cleanliness in all operating conditions.

BOBBER V-Twin Oil SAE 20W-50 semi-synthetic



BOBBER SAE 20W-50 semi-synthetic V-Twin Oil is a specialized motorcycle engine oil carefully formulated from premium base oils blended with a specially crafted high performance additive package. Provides excellent thermal stability and lubricating film strength in hot conditions through its high base viscosity grade and high temperature resistance.

Developed to address the specific issues of V-Twins, it offers outstanding protection from thermal failure, excellent damping properties and ensures perfect engine cleanliness in all operating conditions. Its distinct material compatibility makes it suitable for modern as well as older V-Twins.

Application

Particularly developed and tested for air- and watercooled V-Twin motorcycle engines. Provides highest lubrication reliability and thermal stability, addressing design-specific issues like vibrations and the thermal stress of the rear cylinder.

Especially suited for Harley-Davidson Motorcycles.

Properties

- » High thermal stability and shear resistance
- » Outstanding protection from thermal failure for the rear cylinder in air-cooled V-Twins
- » Very good protection from corrosion and wear
- » Excellent sludge & deposit control for optimum engine cleanliness
- » Distinct damping capabilities

Approvals & Recommendations

API SN
JASO MA-2

Packaging

Item N°

1L Plastic	EN264001
4L Plastic	EN264004
5L Plastic	EN264005
20L Plastic	EN264020
208L Drum	EN264200

Application

Particularly developed and tested for air- and watercooled V-Twin motorcycle engines. Provides highest lubrication reliability and thermal stability, addressing design-specific issues like vibrations and the thermal stress of the rear cylinder.

Its distinct material compatibility makes it especially suitable for modern as well as older Harley-Davidson Motorcycles.

Properties

- » High thermal stability and shear resistance
- » Outstanding protection from thermal failure for the rear cylinder in air-cooled V-Twins
- » High material compatibility maintains seal integrity and prevents oil leaks
- » Excellent sludge & deposit control for optimum engine cleanliness
- » Distinct damping capabilities

Approvals & Recommendations

API SL
JASO MA-2

Packaging

Item N°

1L Plastic	EN261001
4L Plastic	EN261004
5L Plastic	EN261005
20L Plastic	EN261020
208L Drum	EN261200

BOBBER V-Twin Oil Motorcycle CHAIN CASE OIL



BOBBER Motorcycle Chaincase Oil is a high-performance transmission oil based on premium mineral oils refined with a highly optimized additive package. Particularly good heat dissipation from clutch & friction plates and excellent wear protection ensure a longer, trouble-free lifespan for chain, clutch and cogwheels.

Developed for heavy duty, high performance use and especially suitable for modified high-performance clutches.

Application

Designed and tested for the special requirements of motorcycle transmissions with wet clutch and lubed primary chain. Provides outstanding lubricating film adhesion, well balanced friction properties and optimum protection against wear and chain lengthening for significantly extended lifespan. Suitable for Harley-Davidson Motorcycles and other Big Twins from 1984 to the present day.

Properties

- » Outstanding oil film adhesion and shear resistance
- » Prevents slippage and chatter
- » Reduces drag & chain lengthening
- » Excellent overall damping properties
- » Significantly extends the lifespan of chain & clutch


Approvals & Recommendations

API SN
JASO MA-2

Packaging

Item N°

1L Plastic	EN262001
4L Plastic	EN262004
5L Plastic	EN262005
20L Plastic	EN262020
208L Drum	EN262200

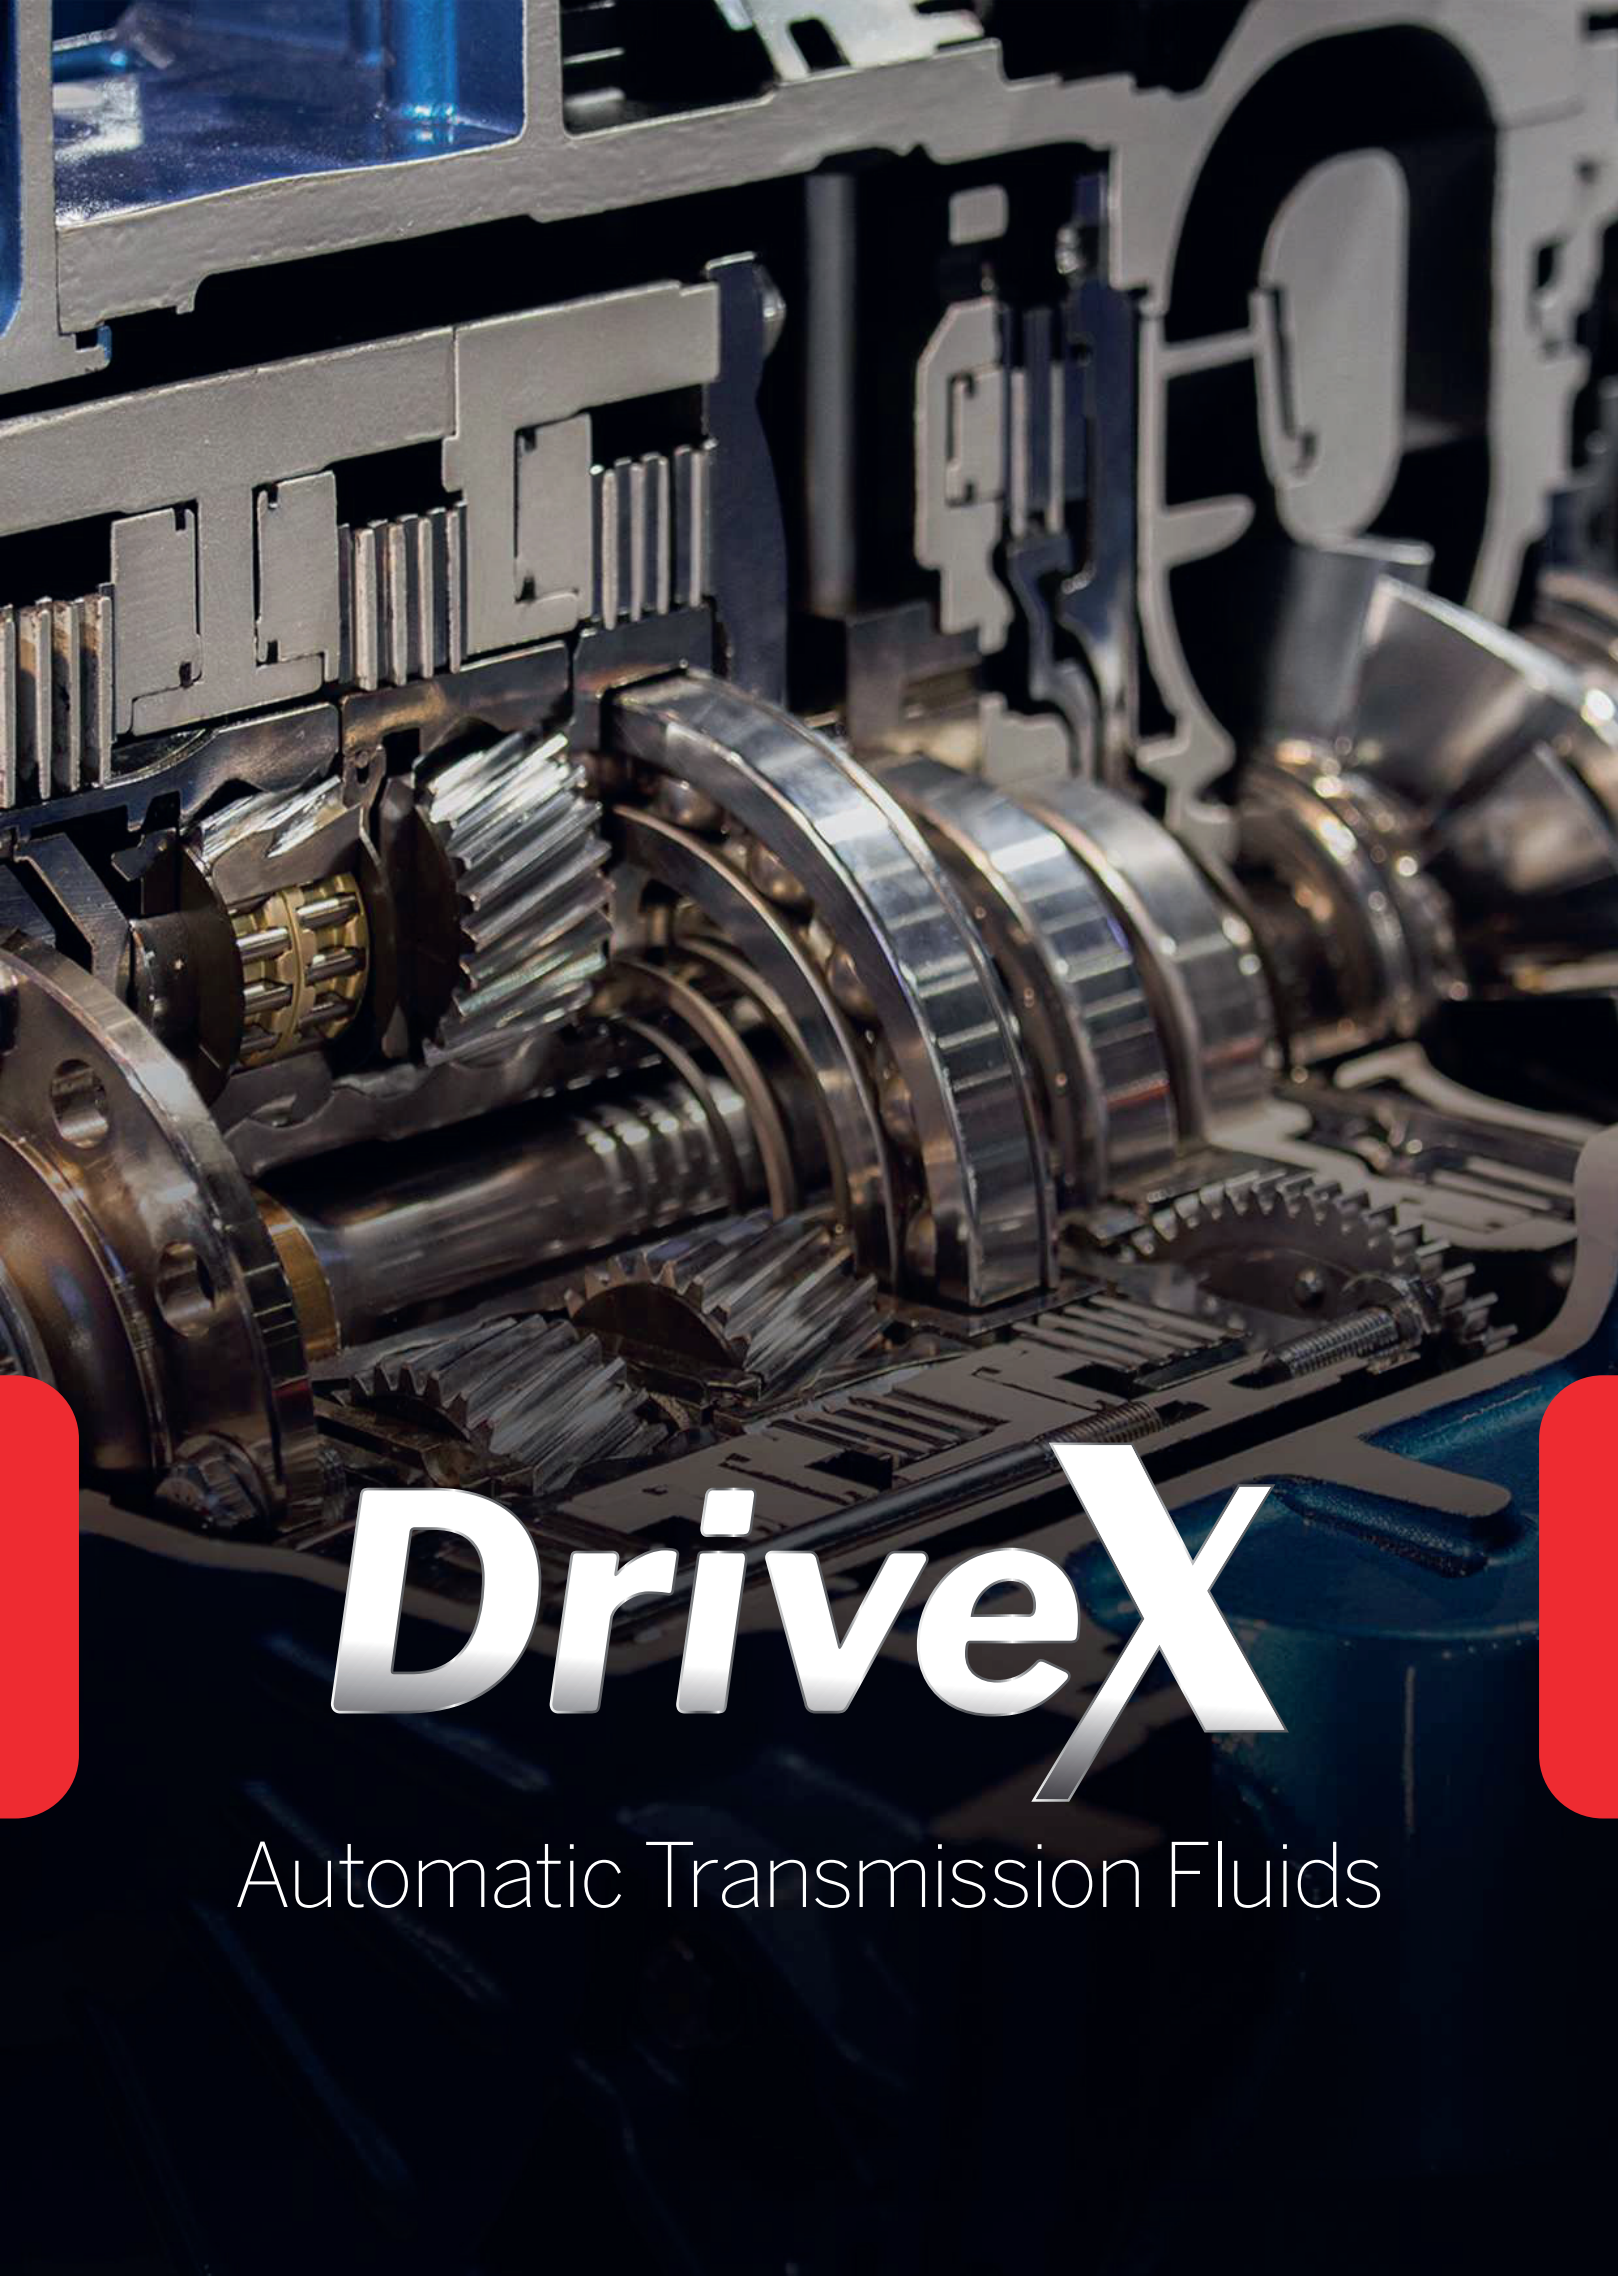

DriveX

Automatic Transmission Fluids

WAGNER DriveX ATF DEXRON VI



Wagner DriveX ATF DEX VI is a high-performance automatic transmission fluid of the latest generation. The combination of high-quality synthetic base oil with modern high-performance additives provides excellent fluidity at low temperatures and high thermal and oxidative stability, ensuring optimal gear switch operations under all operating conditions. Its excellent wear protection and long-term stability extends the service life of the gearbox and enables long oil change intervals.

WAGNER DriveX ATF DEXRON III



Wagner DriveX ATF DEX III is a latest generation automatic transmission fluid using synthetic base oils in combination with an innovative high-performance additive package. The careful formulation guarantees optimum aging stability, excellent wear protection and well-balanced friction properties.

Meets and exceeds the requirements of numerous device and vehicle manufacturers and guarantees perfect functioning even under extreme operating conditions while also suitable for extended service intervals.

Application

Suitable for automatic transmissions from various manufacturers such as Aisin Warner, ZF etc., which are installed in vehicles from Audi, BMW, Ford, Honda, Hyundai, Jeep, Jaguar, Kia, Land Rover, Lexus, Mazda, Mercedes-Benz, Mini, Opel, Peugeot, Porsche, Toyota, VW, Volvo etc.

Properties

- » Outstanding thermal and oxidative stability
- » High aging resistance
- » Excellent fluidity at low temperatures
- » Outstanding wear protection
- » Extends mechanical lifespan
- » Prevents foam formation

Approvals & Recommendations

GM Dexron VI, **Allison** C4, **MERCON** 5, **TES** 389/295, **MB** 236.14 / 236.15 / 236.17, **Audi, BMW, Ford, Honda, Hyundai, Jeep, Jaguar, Kia, Land Rover, Lexus, Mazda, Mercedes-Benz, Mini, Opel, Peugeot, Porsche, Toyota, VW, Volvo**

Packaging

Item N°

1L Plastic	EN796001
4L Plastic	EN796004
5L Plastic	EN796005
20L Plastic	EN796020
208L Drum	EN796200

Application

Suitable for automatic transmissions, torque converters and power steerings for which the manufacturer requires oils according to Dexron III specification.

Properties

- » High and stable viscosity index
- » Very low pour point
- » Excellent aging stability
- » Very high oxidation stability
- » Optimized friction properties
- » High wear protection
- » High metal compatibility

Approvals & Recommendations

Dexron III-H, **Allison** TES-389/C-4, **Mercon**, **MB** 236.9/1, **MAN** 339 Typ L-1/V-1/Z-1, **Voith** 55.6335.xx, **ZF** TE-ML 03D/04D/14A/17C/11B, **Volvo** 97341, **Caterpillar** TO-2, **Renk** Doromat

Packaging

Item N°

1L Plastic	EN798001
4L Plastic	EN798004
5L Plastic	EN798005
20L Plastic	EN798020
208L Drum	EN798200

WAGNER DriveX ATF DEXRON II



Wagner DriveX ATF DEX II is a high-performance automatic transmission fluid made from high-quality mineral base oils blended with advanced additives, viscosity index improvers, antioxidants and defoamers. Guarantees excellent stability and anti-wear properties that exceed the requirements of the Dexron II specification from General Motors.

Suitable for automatic transmissions, power steering systems and hydraulics requiring oil according to Dexron II specification.

Application

Suitable for automatic transmissions, torque converters and power steering, for which the manufacturer requires oils according to Dexron II specification.

Properties

- » Outstanding shear stability
- » High thermal resilience
- » Outstanding viscosity-temperature behaviour
- » Very good low as well as high temperature behaviour
- » Outstanding wear protection
- » Foam-free even under high loads
- » High sealing material compatibility

Approvals & Recommendations

Dexron II-D,
Allison TES-389/C-4,
Mercon, **MB** 236.1,
MAN 339 Typ L-2/V-1/Z-1,
Voith 55.6335.xx,
ZF TE-ML 03D/04D/14A/17C/11B,
Caterpillar TO-2, **Renk** Doromat

Packaging

Item N°

1L Plastic	EN792001
4L Plastic	EN792004
5L Plastic	EN792005
20L Plastic	EN792020
208L Drum	EN792200

WAGNER DriveX ATF CVT



Wagner DriveX ATF CVT is a high-performance automatic transmission oil especially developed for use in continuously variable transmissions, CVTs with push belts or steel drive chains. The high quality, high-strength base oil and the innovative additive treatment guarantee maximum lubricating film stability even under high loads and over the entire service interval. The outstanding oxidation stability and aging resistance ensure constant optimum lubrication performance, preventing wear, tear and material fatigue.

Application

Suitable for modern continuously variable transmissions (CVTs) requiring high steel-to-steel friction to transmit power between belt or chain and pulleys.

Properties

- » High and stable viscosity index
- » Good aging resistance
- » Very low pour point
- » High oxidation stability
- » High wear protection
- » High metal and seal compatibility
- » Very good protection against corrosion
- » Prevents foam formation

Approvals & Recommendations

Audi/VW, **Ammix**,
BMW, **Daihatsu**,
Dodge/Chrysler/Jeep/Mopar,
Ford, **GM/Saturn**, **Honda** HMMF,
Hyundai/Kia, **Mazda**, **MB**,
Mini Cooper, **Mitsubishi**, **Nissan**,
Subaru Lineartronic, **Suzuki**,
Toyota

Packaging

Item N°

1L Plastic	EN794001
4L Plastic	EN794004
5L Plastic	EN794005
20L Plastic	EN794020
208L Drum	EN794200

WAGNER DriveX 8 & 9 Transmission Fluid



WAGNER DriveX 8 & 9 Fluid has been especially developed for 8HP & 9HP automatic transmissions manufactured by ZF. The friction behaviour is optimally adapted for these constructions and stays consistent over the entire service life, thus fulfilling the most demanding requirements on the transmission's comfort behaviour. The customized additives provide specialized protection, extending the service life of all transmission components. Maintains thermal & oxidative stability over the transmission's entire service life. The flat viscosity-temperature progression is perfectly suited for use in extremely cold as well as hot climates.

Application

WAGNER DriveX 8 & 9 Fluid has been especially developed for use in 8HP and some 9HP automatic transmissions from ZF. Please note that only WAGNER DriveX 8 & 9 Fluid may be used for these transmissions (where applicable, also available as genuine spare part). Using other oils can lead to various adverse effects. In principle, an oil change is only necessary when repairs are carried out. In general, these automatic transmissions receive a service life filling. However, high temperature and high load operating conditions or an unknown vehicle maintenance history can make an oil change advisable.

Properties

- » Superior temperature stability
- » Outstanding lubricating film stability
- » Optimum lubricating film adhesion
- » Optimum friction properties
- » High wear protection
- » Very good damping properties


Packaging

Item N°

1L Plastic	EN764001
4L Plastic	EN764004
5L Plastic	EN764005
20L Plastic	EN764020
208L Drum	EN764200

Approvals & Recommendations

Aisin Warner AW-1, **ATF Shell** 3353/ 134/ L12108,
BMW ATF 3+ / ATF 6 / ATF L 12108 / ATF M1375.4,
Chrysler, Ford MERCON® SP,
Honda ATF Type 3.1 / DPFII (DPSF) / DPSF2 Ultra 4WD Rear / DW-1,
Hyundai SPH-IV / SP-IV, **KIA** SP-IV / SP-IV-RR,
Land Rover AW -1 / M1375.4, **Mazda** ATF FZ,
MB 236.12 (A 001 989 45 03 10) / 236.14 (A 001 989 68 03 10) / 236.15 / 236.17,
Mitsubishi 4031610 ATF Fluid J3 / Dia Queen ATF-PA,
Mopar ZF 8 & 9 Speed ATF,
Nissan 999MP-MTP10P / 999MP-MTSOOP Matic Fluid S / ATF Matic P,
Renault Matic J6,
SsangYong Caltex / DSI M11 6-Speed / DSI M78 6-Speed,
Toyota/Lexus JWS3324 / ATF T-WS,
VOLVO 31256774 / 31256775 / 31256776,
VW TL 52533 / TL 55005 / TL 55540 / TL 60162,
ZF LifeguardFluid 6 - 6HP / LifeguardFluid 8 - 8HP / LifeguardFluid 9 - 9HP

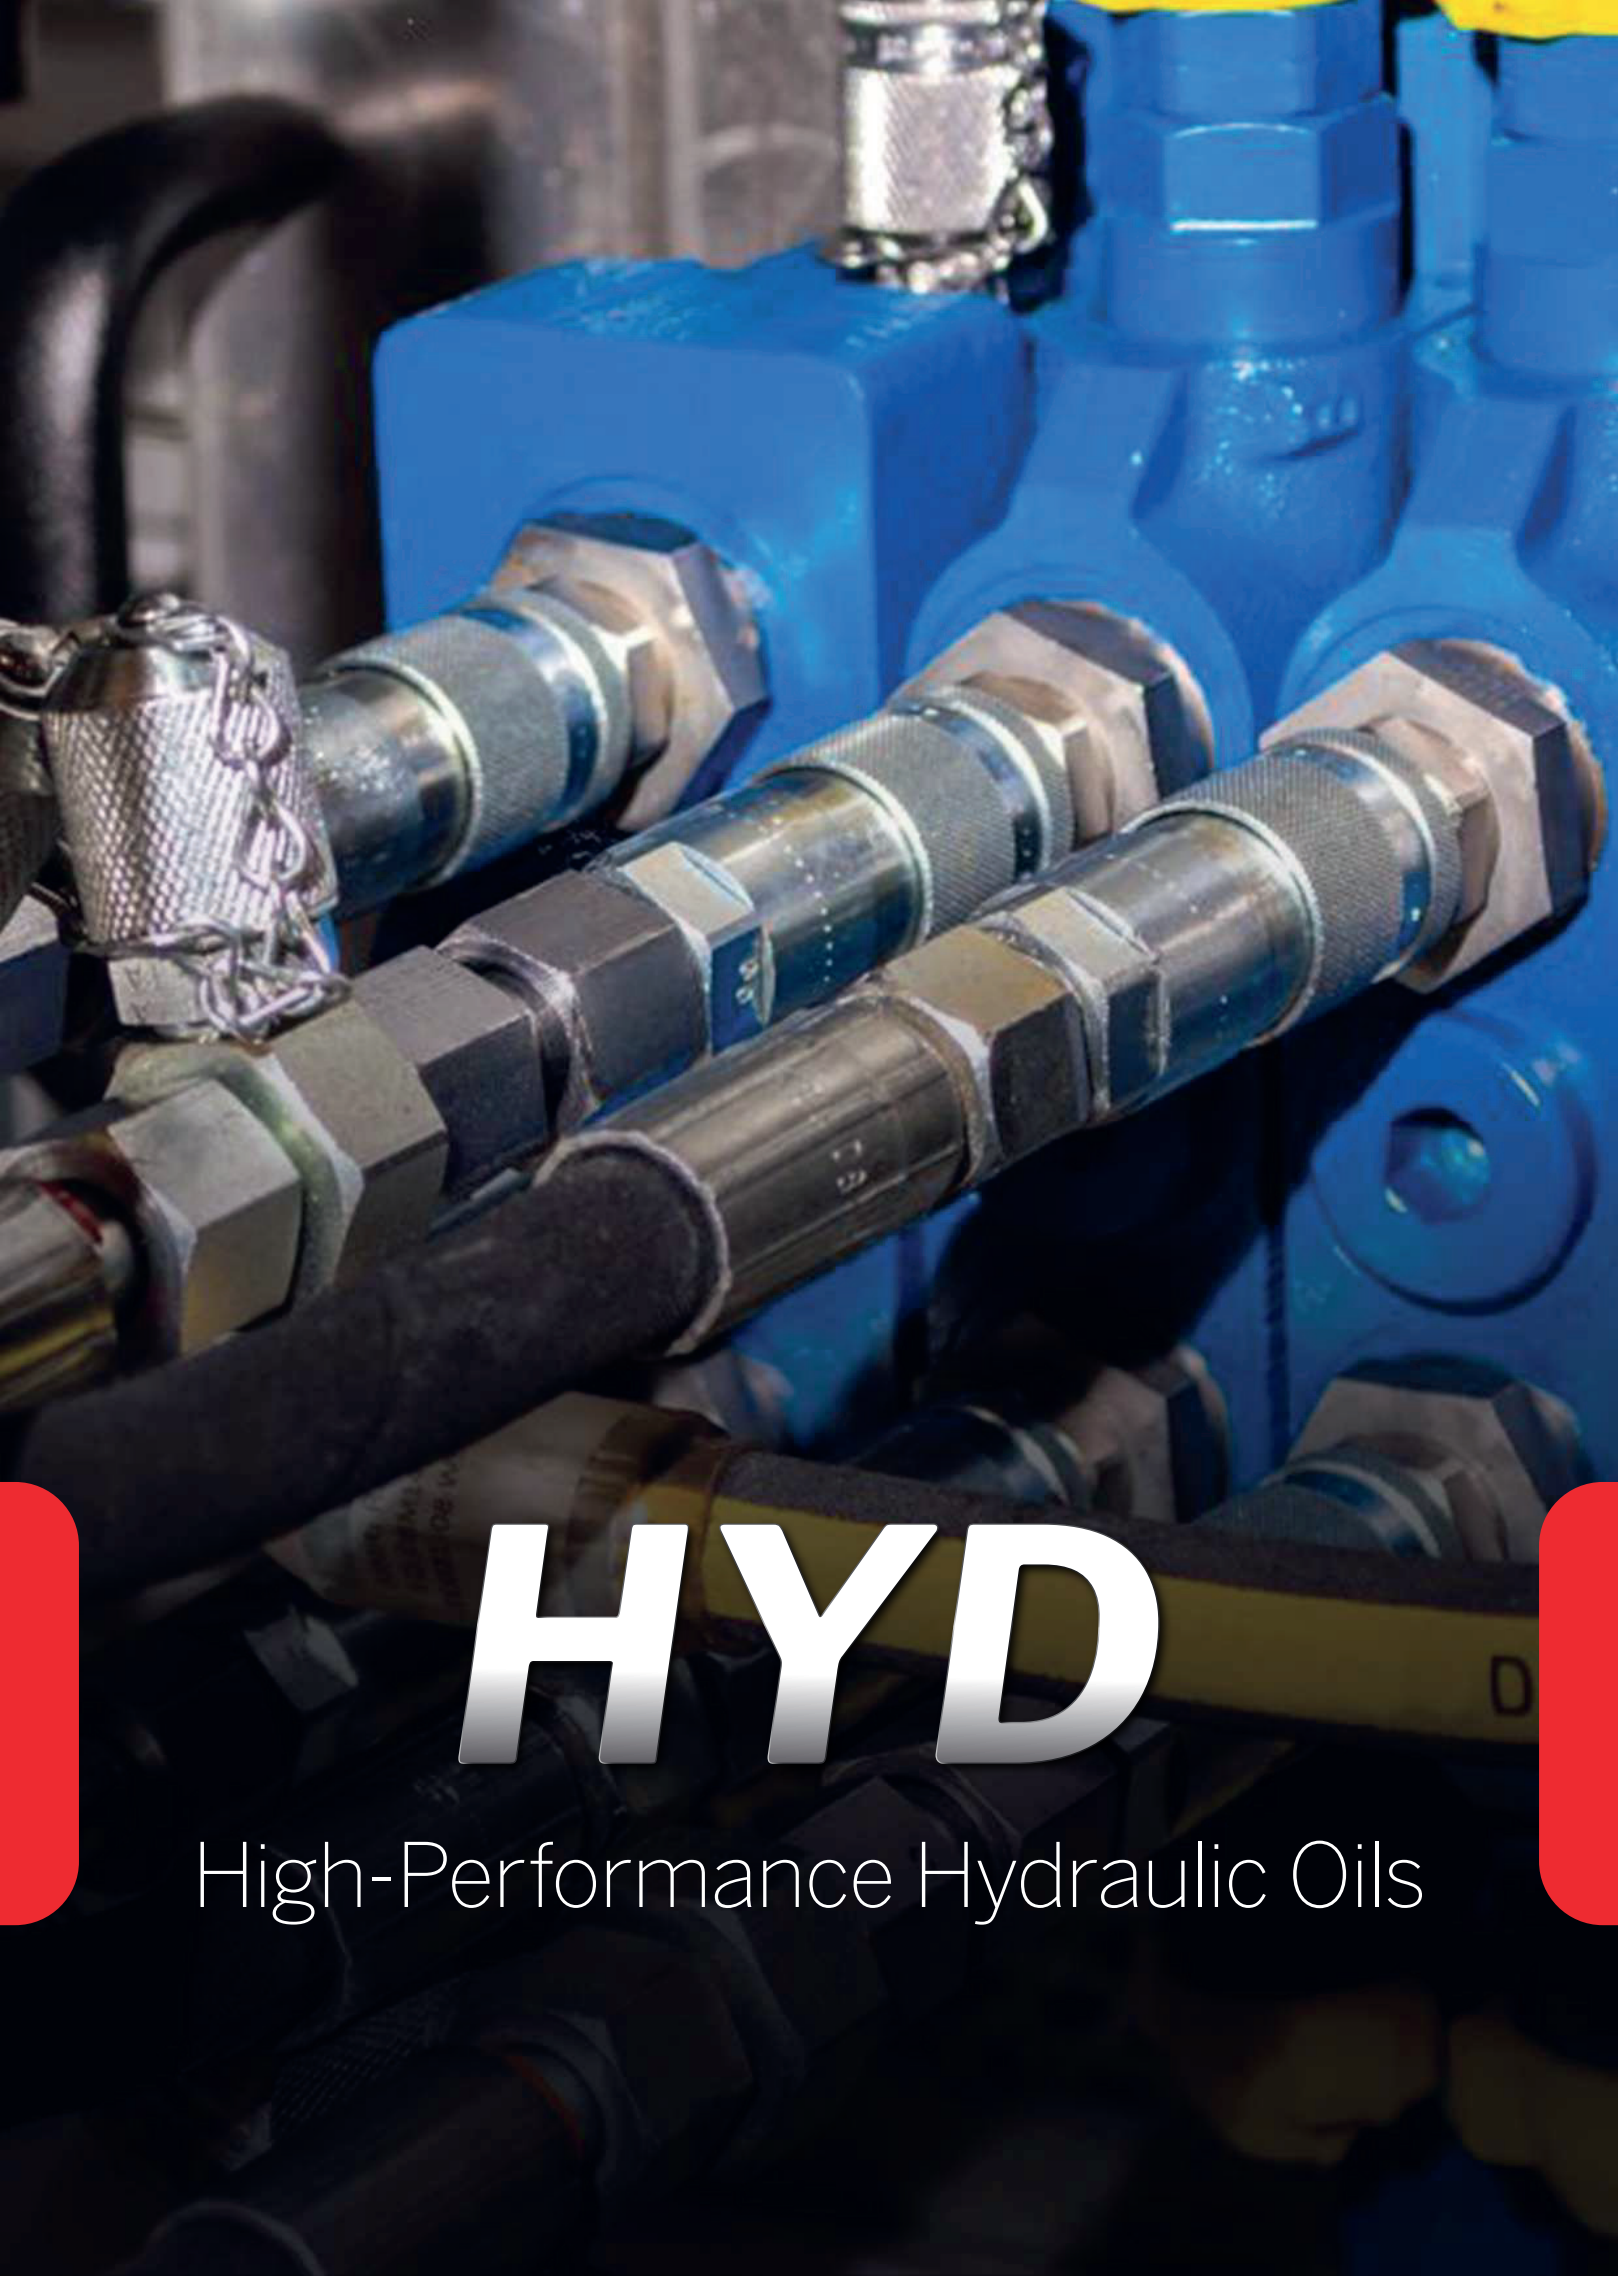

HYD

High-Performance Hydraulic Oils

WAGNER HYD Hydraulic HLP 10



Wagner HYD Hydraulic HLP 10 is a high-performance hydraulic oil made from high quality raffinates. The high thermal stability of the base oil ensures excellent aging resistance even at high working temperatures. The formulation significantly reduces sludge formation, improves cleanliness, provides outstanding oxidation resistance and wear protection in all load conditions and maintains the reliability of the hydraulic system over long service intervals. Together with the excellent corrosion protection even in wet conditions, this fluid optimally protects hydraulic components in all operating states.

WAGNER HYD Hydraulic HLP 22



Wagner HYD Hydraulic HLP 22 is a high-performance hydraulic oil made from high quality raffinates. The high thermal stability of the base oil ensures excellent aging resistance even at high working temperatures. The formulation significantly reduces sludge formation, improves cleanliness, provides outstanding oxidation resistance and wear protection in all load conditions and maintains the reliability of the hydraulic system over long service intervals. Together with the excellent corrosion protection even in wet conditions, this fluid optimally protects hydraulic components in all operating states.

Application

Suitable for stationary and mobile hydraulic systems in construction, forestry and agricultural machines such as excavators, tractors, hoists, industrial and machine tools, log splitters, lifting platforms and presses, etc.

Observe the vehicle or unit manufacturer's instructions.

Properties

- » Outstanding thermal stability
- » Outstanding long-term stability
- » High aging resistance
- » Outstanding wear protection
- » Outstanding protection against corrosion
- » High material compatibility

Approvals & Recommendations

DIN 51524-2, **ISO** 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2,
SEB 181 222

Packaging

Packaging	Item N°
20L Plastic	EN810020
208L Drum	EN810200

Application

Suitable for stationary and mobile hydraulic systems in construction, forestry and agricultural machines such as excavators, tractors, hoists, industrial and machine tools, log splitters, lifting platforms and presses, etc.

Observe the vehicle or unit manufacturer's instructions.

Properties

- » Outstanding thermal stability
- » Outstanding long-term stability
- » High aging resistance
- » Outstanding wear protection
- » Outstanding protection against corrosion
- » High material compatibility

Approvals & Recommendations

DIN 51524-2, **ISO** 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2,
SEB 181 222

Packaging

Packaging	Item N°
20L Plastic	EN822020
208L Drum	EN822200

WAGNER HYD Hydraulic HLP 32



Wagner HYD Hydraulic HLP 32 is a high-performance hydraulic oil made from high quality raffinates. The high thermal stability of the base oil ensures excellent aging resistance even at high working temperatures. The formulation significantly reduces sludge formation, improves cleanliness, provides outstanding oxidation resistance and wear protection in all load conditions and maintains the reliability of the hydraulic system over long service intervals. Together with the excellent corrosion protection even in wet conditions, this fluid optimally protects hydraulic components in all operating states.

WAGNER HYD Hydraulic HLP 46



Wagner HYD Hydraulic HLP 46 is a high-performance hydraulic oil made from high quality raffinates. The high thermal stability of the base oil ensures excellent aging resistance even at high working temperatures. The formulation significantly reduces sludge formation, improves cleanliness, provides outstanding oxidation resistance and wear protection in all load conditions and maintains the reliability of the hydraulic system over long service intervals. Together with the excellent corrosion protection even in wet conditions, this fluid optimally protects hydraulic components in all operating states.

Application

Suitable for stationary and mobile hydraulic systems in construction, forestry and agricultural machines such as excavators, tractors, hoists, industrial and machine tools, log splitters, lifting platforms and presses, etc.

Observe the vehicle or unit manufacturer's instructions.

Properties

- » Outstanding thermal stability
- » Outstanding long-term stability
- » High aging resistance
- » Outstanding wear protection
- » Outstanding protection against corrosion
- » High material compatibility

Approvals & Recommendations

DIN 51524-2, **ISO** 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2,
SEB 181 222

Packaging

Packaging	Item N°
20L Plastic	EN832020
208L Drum	EN832200

Application

Suitable for stationary and mobile hydraulic systems in construction, forestry and agricultural machines such as excavators, tractors, hoists, industrial and machine tools, log splitters, lifting platforms and presses, etc.

Observe the vehicle or unit manufacturer's instructions.

Properties

- » Outstanding thermal stability
- » Outstanding long-term stability
- » High aging resistance
- » Outstanding wear protection
- » Outstanding protection against corrosion
- » High material compatibility

Approvals & Recommendations

DIN 51524-2, **ISO** 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2,
SEB 181 222

Packaging

Packaging	Item N°
20L Plastic	EN846020
208L Drum	EN846200

WAGNER HYD Hydraulic HLP 68



Wagner HYD Hydraulic HLP 68 is a high-performance hydraulic oil made from high quality raffinates. The high thermal stability of the base oil ensures excellent aging resistance even at high working temperatures. The formulation significantly reduces sludge formation, improves cleanliness, provides outstanding oxidation resistance and wear protection in all load conditions and maintains the reliability of the hydraulic system over long service intervals. Together with the excellent corrosion protection even in wet conditions, this fluid optimally protects hydraulic components in all operating states.

WAGNER HYD Hydraulic HVLP 46



Wagner HYD Hydraulic HVLP 46 is a high-purity, high-performance hydraulic oil for modern hydraulic systems. The high quality, pure first raffinates guarantee optimal pressure behaviour and shock absorption as well as very high stability even with high temperature fluctuations. The state-of-the-art additive package provides excellent protection in all temperature and load ranges, high oxidation resistance and very high water separation capacity. This fluid guarantees optimum protection and operational safety for outdoor facilities such as barriers, scrap presses, locks and weir systems.

Application

Suitable for stationary and mobile hydraulic systems in construction, forestry and agricultural machines such as excavators, tractors, hoists, industrial and machine tools, log splitters, lifting platforms and presses, etc.

Observe the vehicle or unit manufacturer's instructions.

Properties

- » Outstanding thermal stability
- » Outstanding long-term stability
- » High aging resistance
- » Outstanding wear protection
- » Outstanding protection against corrosion
- » High material compatibility

Approvals & Recommendations

DIN 51524-2, **ISO** 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2,
SEB 181 222

Packaging

Packaging	Item N°
20L Plastic	EN868020
208L Drum	EN868200

Application

Suitable for hydraulic systems in construction, mining, earthmoving, forestry and industrial plants. Particularly suitable under severe conditions such as high humidity and shock loads as well as with large temperature fluctuations.

Properties

- » High degree of purity
- » High shear stability
- » High thermal stability
- » Outstanding long-term stability
- » High aging and oxidation resistance
- » Outstanding wear protection
- » Excellent shock absorption
- » High demulsibility
- » Good corrosion protection

Approvals & Recommendations

DIN 51524-2, **ISO** 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2

Packaging

Packaging	Item N°
20L Plastic	EN8146020
208L Drum	EN8146200

WAGNER HYD Hydraulic HVLP 68



Wagner HYD Hydraulic HVLP 68 is a high-purity, high-performance hydraulic oil for modern hydraulic systems. The high quality, pure first raffinates guarantee optimal pressure behaviour and shock absorption as well as very high stability even with high temperature fluctuations. The state-of-the-art additive package provides excellent protection in all temperature and load ranges, high oxidation resistance and very high water separation capacity. This fluid guarantees optimum protection and operational safety for outdoor facilities such as barriers, scrap presses, locks and weir systems.

Application

Suitable for hydraulic systems in construction, mining, earthmoving, forestry and industrial plants. Particularly suitable under severe conditions such as high humidity and shock loads as well as with large temperature fluctuations.

Properties

- » High degree of purity
- » High shear stability
- » High thermal stability
- » Outstanding long-term stability
- » High aging and oxidation resistance
- » Outstanding wear protection
- » Excellent shock absorption
- » High demulsibility
- » Good corrosion protection

Approvals & Recommendations

DIN 51524-2, ISO 11158,
ASTM D6158,
JCMAS P041HK,
AIST 126+127,
SAE MS1004,
GM LS2

Packaging

20L Plastic
208L Drum

Item N°

EN8168020
EN8168200



TransX

Advanced
Transmission Fluids

WAGNER TransX SAE 75W-80 GL-4



WAGNER TransX 75W-80 GL-4 is a premium quality gear oil specifically designed to meet the rigorous demands of modern manual transmissions and transaxles.

With its carefully balanced formulation based on advanced synthetic base oils blended with high-performance additives, this gear oil provides outstanding wear protection, ensuring smooth and reliable gear shifts across a wide range of operating temperatures and conditions.

WAGNER TransX SAE 80W-90 GL-4



Wagner TransX 80W-90 GL-4 is a robust gear oil engineered to deliver exceptional performance in manual transmissions and differentials. This oil is formulated with an unique blend of high-quality base oils and advanced additives that provide superior protection against wear and corrosion.

It is particularly effective in maintaining smooth operation and extending the lifespan of transmission components under heavy load and in hot conditions.

Application

Wagner TransX 75W-80 GL-4 is suitable for use in a variety of manual transmissions and transaxles, particularly those found in passenger cars, light trucks and commercial vehicles. It is designed to maintain optimal lubrication and protection under both average and severe driving conditions, making it an excellent choice for vehicles operating in stop-and-go traffic or under heavy loads.

Properties

- » High shear stability
- » Consistent viscosity and performance throughout the temperature range
- » Excellent thermal stability prevents oil degradation at high temperatures
- » Superior wear protection extends the lifespan of gears and synchronizers
- » Outstanding protection against corrosion safeguards internal components

Approvals & Recommendations

BMW MTF LT-2-3
Ford WSS M2C200-D2
GM 1940764/1940769
MB 235.10

Packaging

Item N°

1L Plastic	EN658001
4L Plastic	EN658004
5L Plastic	EN658005
20L Plastic	EN658020
208L Drum	EN658200

Application

Wagner TransX 80W-90 GL-4 is ideal for use in manual gearboxes, axle transmissions and transfer cases in a wide range of vehicles, including passenger cars, light trucks and heavy-duty commercial vehicles. It is particularly well-suited for applications requiring absolute reliability in both cold and hot conditions.

Properties

- » Enhanced wear protection under heavy-load conditions
- » Excellent viscosity-temperature behavior for stable operation across a wide temperature range
- » Outstanding corrosion resistance protects internal components from environmental damage
- » High thermal stability for long-lasting protection and extended oil change intervals

Approvals & Recommendations

ZF TE-ML 16A/17A/19A
MAN 341 Type E-1/Z-2

Packaging

Item N°

1L Plastic	EN689001
4L Plastic	EN689004
5L Plastic	EN689005
20L Plastic	EN689020
208L Drum	EN689200

WAGNER TransX
SAE 80W-90 GL-5


WAGNER TransX 80W-90 GL-5 is a high-performance gear oil designed for use in heavily loaded transmissions and final drives. Formulated with advanced extreme pressure (EP) additives, this oil provides superior protection against gear wear, pitting and scuffing under the most demanding conditions.

The high viscosity index ensures excellent lubrication and protection at both low and high temperatures.

WAGNER TransX
SAE 85W-140 GL-5


Wagner TransX 85W-140 GL-5 is a heavy-duty gear oil formulated to deliver exceptional protection and performance in extreme operating conditions. This oil is ideal for use in high-load and high-temperature applications, where it provides robust protection against wear, corrosion and oxidation.

The oil's high viscosity ensures that it maintains a strong lubricating film even under severe conditions, preventing metal-to-metal contact and reducing frictional losses.

Application

Wagner TransX 80W-90 GL-5 is suitable for use in manual gearboxes, differentials, and final drives where a GL-5 oil is required. It is particularly effective in high-load applications such as off-road vehicles, commercial trucks and construction equipment, where it provides reliable performance even under extreme pressure and shock loads.

Properties

- » Outstanding extreme pressure (EP) performance protects against gear scuffing and pitting
- » Excellent thermal and oxidative stability extends oil life and reduces maintenance costs
- » High resistance to oil degradation ensures consistent performance over extended service intervals
- » Superior corrosion protection safeguards components in harsh environments

Approvals & Recommendations

ZF TE-ML 16B/17B/19B/21A
MB 235.0
MIL-L-2105D

Packaging
Item N°

1L Plastic	EN789001
4L Plastic	EN789004
5L Plastic	EN789005
20L Plastic	EN789020
208L Drum	EN789200

Application

Wagner TransX 85W-140 GL-5 is designed for use in differentials, final drives, and gearboxes in heavy-duty vehicles and equipment. It is particularly well-suited for applications where high loads, high temperatures or severe operating conditions are common, such as in construction, mining and long-haul trucking.

Properties

- » High viscosity stability ensures consistent protection under heavy loads and high temperatures
- » Superior extreme pressure (EP) additives protect against gear wear and pitting
- » Excellent oxidation resistance prevents oil thickening and sludge formation
- » Outstanding protection against corrosion in harsh operating environments

Approvals & Recommendations

MIL-L-2105D
MAN 342 Typ M-1
Volvo 97310

Packaging
Item N°

1L Plastic	EN784001
4L Plastic	EN784004
5L Plastic	EN784005
20L Plastic	EN784020
208L Drum	EN784200

WAGNER TransX SAE 90 GL-5



Wagner TransX SAE 90 GL-5 is a high-performance gear oil specifically engineered to provide exceptional protection in manual transmissions, differentials and final drives that operate under high pressure and heavy loads.

This oil features a carefully formulated blend of base oils and extreme pressure (EP) additives that work together to prevent gear wear, scuffing and corrosion.

WAGNER TransX SAE 90 GL-4



Wagner TransX SAE 90 GL-4 is a premium gear oil formulated to provide superior protection and performance in manual transmissions and gearboxes. This oil offers excellent wear protection, smooth shifting and long-lasting performance.

Its advanced formulation includes high-quality base oils and carefully selected additives that work together to maintain optimal lubrication and prevent gear wear.

Application

Wagner TransX SAE 90 GL5 is ideal for use in a wide range of vehicles and equipment, including commercial trucks, off-road vehicles and heavy machinery. It is particularly well-suited for applications where high load-carrying capacity and reliable performance are critical, such as in construction and agriculture.

Properties

- » Excellent thermal stability ensures long service life and consistent performance
- » Superior extreme pressure (EP) protection minimizes gear wear and extends component lifespan
- » High oxidation resistance prevents oil degradation and sludge formation
- » Outstanding corrosion protection safeguards gears and bearings from environmental damage

Approvals & Recommendations

MIL-L-2105D

Packaging

Item N°

1L Plastic	EN790001
4L Plastic	EN790004
5L Plastic	EN790005
20L Plastic	EN790020
208L Drum	EN790200

Application

Wagner TransX SAE 90 GL-4 is suitable for use in manual transmissions and gearboxes of passenger cars, light trucks and commercial vehicles. It is particularly well-suited for applications where precise gear operation and long-term reliability are essential, such as in vehicles with synchronized manual transmissions.

Properties

- » Enhanced gear protection under load ensures extended component lifespan
- » Excellent corrosion resistance protects against environmental damage
- » Stable viscosity across a wide temperature range provides consistent performance
- » High thermal stability prevents oil breakdown and extends service intervals

Approvals & Recommendations

ZF TE-ML 16A/17A/19A

Packaging

Item N°

1L Plastic	EN690001
4L Plastic	EN690004
5L Plastic	EN690005
20L Plastic	EN690020
208L Drum	EN690200



BRAKE

Advanced
Break Fluids

W BRAKE DOT-3



Wagner BRAKE DOT-3 is a high-performance fluid formulated to meet the needs of modern braking systems. With its superior thermal stability and excellent corrosion protection, Wagner Brake DOT 3 ensures reliable and consistent braking performance under a wide range of conditions.

This fluid is suitable for use in both disc and drum brake systems. Its high boiling point helps prevent vapor lock, ensuring that your braking system remains responsive even in extreme conditions.

Application

Wagner Brake DOT-3 is designed for use in passenger cars, light trucks and motorcycles where DOT-3 brake fluid is specified.

It is compatible with all conventional brake system materials, providing reliable performance in both urban and highway driving conditions.

Properties

- » High boiling point reduces the risk of vapor lock, ensuring consistent braking performance
- » Superior corrosion protection helps extend the lifespan of brake components
- » Excellent compatibility with all brake system materials prevents fluid degradation and leaks
- » Stable viscosity across a wide temperature range ensures reliable operation in both cold and hot conditions

Approvals & Recommendations

F.M.V.SS.NO.116
SAE J1703
ISO 4925

Packaging

Item N°

250ml Plastic	EN990250
500ml Plastic	EN990500
1L Plastic	EN990001
208L Drum	EN990200

W BRAKE DOT-4



Wagner BRAKE DOT-4 is an advanced brake fluid designed to deliver exceptional performance in modern braking systems, including those equipped with ABS and ESP. This high-quality fluid provides superior thermal stability and corrosion protection, ensuring consistent and reliable braking performance under even the most demanding conditions.

Formulated to resist moisture absorption, which helps maintain a high boiling point and reduces the risk of vapor lock.

Application

Wagner Brake DOT-4 is suitable for use in a wide range of vehicles, including high-performance cars and motorcycles, where DOT-4 brake fluid is required.

It is particularly well-suited for vehicles equipped with advanced braking systems such as ABS and ESP, where consistent braking performance is critical.

Properties

- » Higher boiling point for improved safety margins, especially in high-temperature conditions
- » Exceptional corrosion resistance protects brake system components from rust and wear
- » High thermal stability ensures consistent braking performance under extreme conditions
- » Reduced moisture absorption helps maintain fluid integrity and extends the lifespan of the braking system

Approvals & Recommendations

F.M.V.SS.NO.116
SAE J1703
ISO 4925

Packaging

Item N°

250ml Plastic	EN991250
500ml Plastic	EN991500
1L Plastic	EN991001
208L Drum	EN991200

W BRAKE DOT-5.1



Wagner Brake DOT-5.1 is a cutting-edge synthetic brake fluid specifically formulated for high-performance and racing applications. It offers exceptional thermal stability and corrosion protection, making it ideal for vehicles that operate under extreme conditions. It has a higher boiling point than DOT-3 and DOT-4 fluids, providing an extra margin of safety against vapor lock, especially in high-speed or high-load situations.

Application

Wagner Brake DOT-5.1 is perfect for use in high-performance vehicles, including sports cars and motorcycles, as well as in racing applications where maximum braking performance is required. It is also suitable for vehicles equipped with advanced braking systems, providing consistent and reliable performance under extreme conditions.

Properties

- » Extremely high boiling point provides superior vapor lock protection, even in the most demanding conditions
- » Outstanding compatibility with all brake system materials ensures long-term reliability
- » Enhanced corrosion protection extends the lifespan of brake components, reducing maintenance costs
- » Stable viscosity across a wide temperature range ensures consistent braking performance in both cold and hot climates

Approvals & Recommendations

F.M.V.SS.NO.116
SAE J1703
ISO 4925

Packaging

Item N°

250ml Plastic	EN992250
500ml Plastic	EN992500
1L Plastic	EN992001
208L Drum	EN992200

A detailed close-up photograph of industrial machinery. Several large, dark-colored metal gears are visible, with their teeth interlocking. A central shaft with a hexagonal nut and a smaller pinion gear is prominent in the upper left. The lighting is dramatic, highlighting the metallic textures and the sharp edges of the gear teeth. The overall tone is industrial and mechanical.

GEAR

High-Performance Industrial Gear Oils

WAGNER GEAR CLP VG 100



WAGNER GEAR CLP VG100 is a modern high-performance gear oil based on especially selected base oils showing excellent thermal stability, good ageing resistance as well as extraordinary wear protection properties.

Application

Wagner Gear CLP Oils are used in industrial gear boxes subject to high loads, eg. spur gears, bevel gears and planetary gears.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability against aging
- » High thermal stability
- » Excellent corrosion protection

Approvals & Recommendations

DIN 51517-PART III
AGMA 9005-F16(AS)
ISO 12925-1(CKC)

Packaging

Packaging	Item N°
20L Plastic	EN180020
208L Drum	EN180200

WAGNER GEAR CLP VG 150



WAGNER GEAR CLP VG150 is a modern high-performance gear oil based on especially selected base oils showing excellent thermal stability, good ageing resistance as well as extraordinary wear protection properties.

Application

Wagner Gear CLP Oils are used in industrial gear boxes subject to high loads, eg. spur gears, bevel gears and planetary gears.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability against aging
- » High thermal stability
- » Excellent corrosion protection

Approvals & Recommendations

DIN 51517-PART III
AGMA 9005-F16(AS)
ISO 12925-1(CKC)

Packaging

Packaging	Item N°
20L Plastic	EN181020
208L Drum	EN181200

WAGNER GEAR CLP VG 220



WAGNER GEAR CLP VG220 is a modern high-performance gear oil based on especially selected base oils showing excellent thermal stability, good ageing resistance as well as extraordinary wear protection properties.

Application

Wagner Gear CLP Oils are used in industrial gear boxes subject to high loads, eg. spur gears, bevel gears and planetary gears.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability against aging
- » High thermal stability
- » Excellent corrosion protection

Approvals & Recommendations

DIN 51517-PART III
AGMA 9005-F16(AS)
ISO 12925-1(CKC)

Packaging

Item N°

20L Plastic	EN182020
208L Drum	EN182200

WAGNER GEAR CLP VG 320



WAGNER GEAR CLP VG320 is a modern high-performance gear oil based on especially selected base oils showing excellent thermal stability, good ageing resistance as well as extraordinary wear protection properties.

Application

Wagner Gear CLP Oils are used in industrial gear boxes subject to high loads, eg. spur gears, bevel gears and planetary gears.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability against aging
- » High thermal stability
- » Excellent corrosion protection

Approvals & Recommendations

DIN 51517-PART III
AGMA 9005-F16(AS)
ISO 12925-1(CKC)

Packaging

Item N°

20L Plastic	EN183020
208L Drum	EN183200

WAGNER GEAR
CLP VG 460


WAGNER GEAR CLP VG460 is a modern high-performance gear oil based on especially selected base oils showing excellent thermal stability, good ageing resistance as well as extraordinary wear protection properties.

Application

Wagner Gear CLP Oils are used in industrial gear boxes subject to high loads, eg. spur gears, bevel gears and planetary gears.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability against aging
- » High thermal stability
- » Excellent corrosion protection

Approvals & Recommendations

DIN 51517-PART III
AGMA 9005-F16(AS)
ISO 12925-1(CKC)

Packaging
Item N°

20L Plastic	EN184020
208L Drum	EN184200

WAGNER GEAR
CLP VG 680


WAGNER GEAR CLP VG680 is a modern high-performance gear oil based on especially selected base oils showing excellent thermal stability, good ageing resistance as well as extraordinary wear protection properties.

Application

Wagner Gear CLP Oils are used in industrial gear boxes subject to high loads, eg. spur gears, bevel gears and planetary gears.

Properties

- » Highest load carrying capacity
- » Excellent wear protection
- » Good stability against aging
- » High thermal stability
- » Excellent corrosion protection

Approvals & Recommendations

DIN 51517-PART III
AGMA 9005-F16(AS)
ISO 12925-1(CKC)

Packaging
Item N°

20L Plastic	EN185020
208L Drum	EN185200



Xtreme *Cool*

Antifreeze & Coolants


WAGNER Xtreme Cool
 Premix **33% BLUE**


WAGNER Xtreme Cool Premix 33% Blue is an economical corrosion inhibitor and anti-freeze concentrate for radiators in water cooled vehicles. It is free of phosphates, silicates, nitrite, amine and nitrates. This antifreeze provides excellent frost and corrosion protection without any negative impact on coolant hoses or gaskets.

WAGNER Xtreme Cool
 Premix **33% GREEN**


WAGNER Xtreme Cool Premix 33% Green is an economical corrosion inhibitor and anti-freeze concentrate for radiators in water cooled vehicles. It is free of phosphates, silicates, nitrite, amine and nitrates. This antifreeze provides excellent frost and corrosion protection without any negative impact on coolant hoses or gaskets.

Application

Wagner Xtreme Cool Premix 33% Blue offers good corrosion protection to a wide range of metals. Compatible with most seal materials, contributing to leak protection. Provides efficient freeze protection and boiling resistance.

Properties

- » Provides effective long term anti-corrosion support by protecting brass, cast iron, steel, solder and copper components
- » Provides superior high temperature protection for aluminium components

Approvals & Recommendations

BS6580
SAE J1034
ASTM 3306 & 4985
PSA B715110

Packaging
Item N°

1L Plastic	EN924001
4L Plastic	EN924004
5L Plastic	EN924005
20L Plastic	EN924020
208L Drum	EN924200

Application

Wagner Xtreme Cool Premix 33% Green offers good corrosion protection to a wide range of metals. Compatible with most seal materials, contributing to leak protection. Provides efficient freeze protection and boiling resistance.

Properties

- » Provides effective long term anti-corrosion support by protecting brass, cast iron, steel, solder and copper components
- » Provides superior high temperature protection for aluminium components

Approvals & Recommendations

BS6580
Ford ESE
MAN N/248/324
MB 325.3
Renault 41-01-001
Porsche/VW/Audi/Seat/Skoda
TL 774 D

Packaging
Item N°

1L Plastic	EN927001
4L Plastic	EN927004
5L Plastic	EN927005
20L Plastic	EN927020
208L Drum	EN927200



WAGNER Xtreme Cool Premix 50% BLUE



WAGNER Xtreme Cool Premix 33% Red is an economical corrosion inhibitor and anti-freeze concentrate for radiators in water cooled vehicles. It is free of phosphates, silicates, nitrite, amine and nitrates. This antifreeze provides excellent frost and corrosion protection without any negative impact on coolant hoses or gaskets.

Application

Wagner Xtreme Cool Premix 33% Red offers good corrosion protection to a wide range of metals. Compatible with most seal materials, contributing to leak protection. Provides efficient freeze protection and boiling resistance.

Properties

- » Provides effective long term anti-corrosion support by protecting brass, cast iron, steel, solder and copper components
- » Provides superior high temperature protection for aluminium components

Approvals & Recommendations

BS6580
SAE J1034
ASTM 3306 & 4985
PSA B715110

Packaging

Item N°

1L Plastic	EN926001
4L Plastic	EN926004
5L Plastic	EN926005
20L Plastic	EN926020
208L Drum	EN926200

[illegible]

WAGNER
High Quality Lubricants

Global Solutions



Wagner Spezialschmierstoffe GmbH & Co. KG
Speckbrodi 8 • 86759 Wechingen
Germany

☎ +49 9085 96 00 910
www.wagner-german-oil.com
www.classic-oil.com