



The clean solution

DV 270.2

**HOT WATER
SANITIZING
DOOR-TYPE POT AND
PAN WASHER**



Standard Features:

- Capacity 15 cycles per hour
- Water consumption 2.55 gallons (9.65 liters) per cycle
- Oscillating wash arms for complete ware coverage
- Double-wall construction keeps heat inside the machine, reducing energy consumption and heat loss into the dishroom environment
- Variable programmed time cycles - 4, 6 and 8 minutes
- Fully automatic - automatic fill, automatic start, and automatic reset
- Pumped drain for both floor and wall drain applications
- Machine shutdown activates an automatic rinse of the wash chamber to ease cleaning
- Stainless steel non-clogging wash and rinse arms
- Sloping wash tank directs food soil into large, easily-removed pan strainers
- Front mounted controls with digital temperature displays
- Two 3 Hp (2.2 kW) wash pumps
- 304 and 316L stainless steel construction for corrosion resistance
- Type A air gap system eliminates need for vacuum breaker
- Wheeled stainless steel wire basket with removable sheet pan insert

Special Features:

- **High capacity** - Wheeled stainless steel basket has clearances of 50-1/2" W x 26" D (1280 x 660mm). Supplied sheet pan insert holds 11 sheet pans per cycle. One additional insert is optional for a full capacity of 22 sheet pans per cycle.
- **Auto Safe temperature control system** - *Guarantees 180°F (82°C) sanitizing final rinse temperature, regardless of incoming water temperature*
- **MIKE 2 electronic control system** - advanced micro-computer technology for service diagnostics and end-user machine settings. Includes one-touch operation, one-touch selection of three different cycle lengths, automatic temperature monitoring with digital display, and advanced service diagnostics
- **Active Plus filtration system** - Double filtration of wash water removes food soil, improves washing efficiency and saves detergent while easing cleaning chores
- **Soft Start wash pumps** - Protects fragile ware from chipping or breaking
- **Aqua-Stop** - Automatically stops machine operation and turns off the water fill if internal leaking is detected
- **Built-in booster heater with power rinse pump** - Guarantees constant final rinse pressure and temperature for consistent, outstanding results



Options:

- Built-in liquid detergent and rinse aid pumps
- Flanged, bolt-down feet
- External vent fan control
- Drain water tempering kit (installed by others)
- Drain water tempering kit (factory-installed)
- Additional sheet pan insert (holds 11 pans) - increases machine capacity to 22 sheet pans per cycle


This dishwasher is compliant with the Reduction of Lead in Drinking Water Act (2011) amendment to the Safe Drinking Water Act (SDWA).



Dimensions

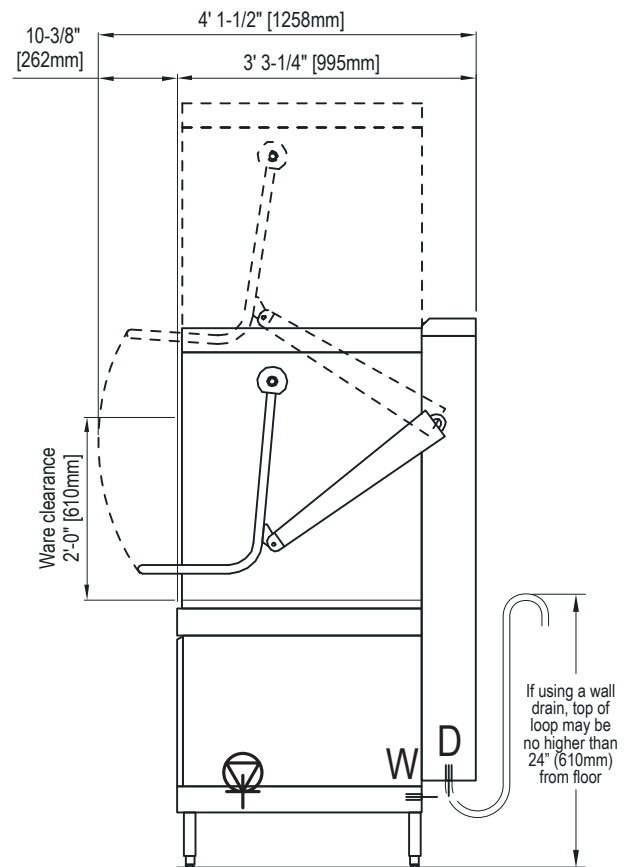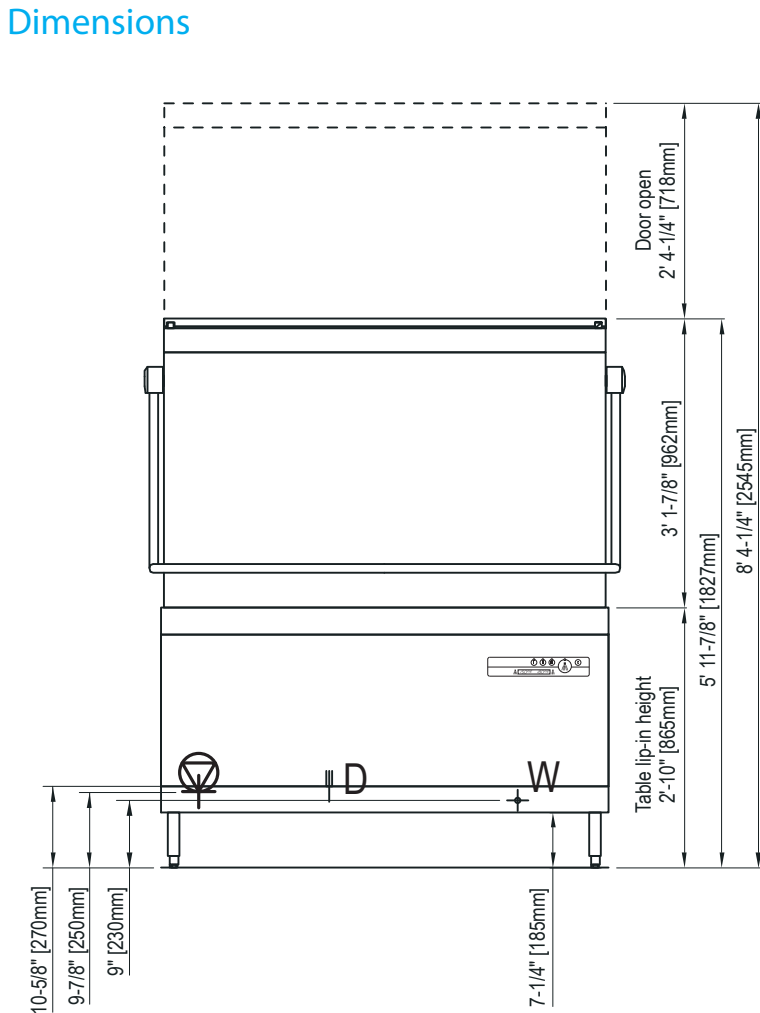

**All dimensions
from floor +/- 1/2"
(13mm) due to
adjustable feet.**

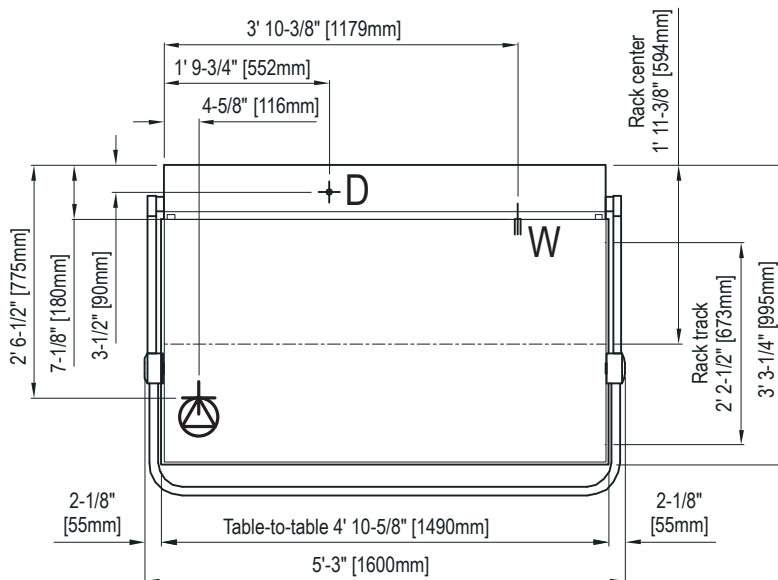

Electrical terminal block

Strain relief provided at lower rear of machine.
Terminal block is located at front of machine and is accessed by removing lower front panel.
Adequate slack in the wiring should be provided to allow the machine to be moved for servicing.



Fresh water connection

3/4" female garden hose supply connection is provided. Supplied hose is 4' 7" (2616mm) in length.



Drain connection

Requires indirect connection to 2" (50mm) drain pipe (wall or floor). Supplied hose is 4' 7" (2616mm) long and should be cut to appropriate length at time of installation to allow machine to be repositioned for servicing.

Table Length

The DV 270.2 is designed to be used with tabling on both sides for efficient pass-through loading and unloading. Ensure that the clear tabletop (not including edging, backsplash, etc.) extends at least 4' 6" (1372mm) from the machine to provide clearance for the ware basket.

Note that this dimension refers to the clear tabletop space for the basket, not the complete table length. Most tables use a rolled edge or backsplash at the end which adds to the table length.

Note that the DV 270.2 cannot be installed in a corner if tabling is used on both sides of the machine.



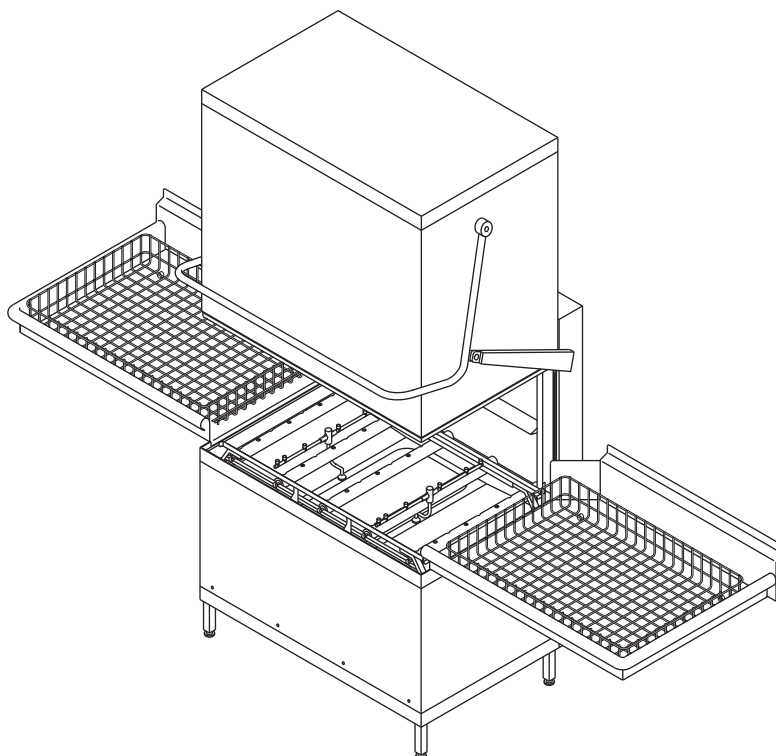


Table Positioning


Without backsplash,
or island installation

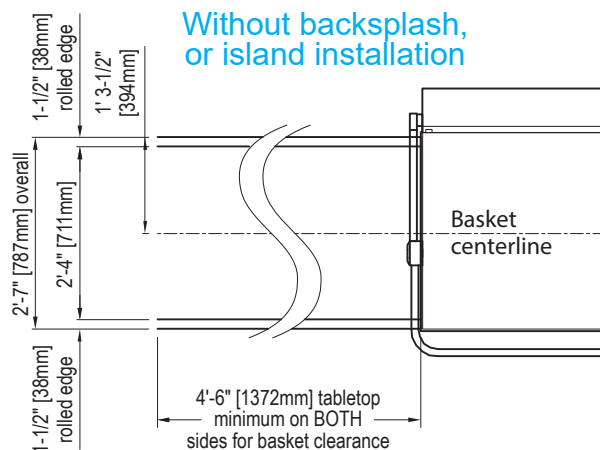

With backsplash,
tables flush to wall

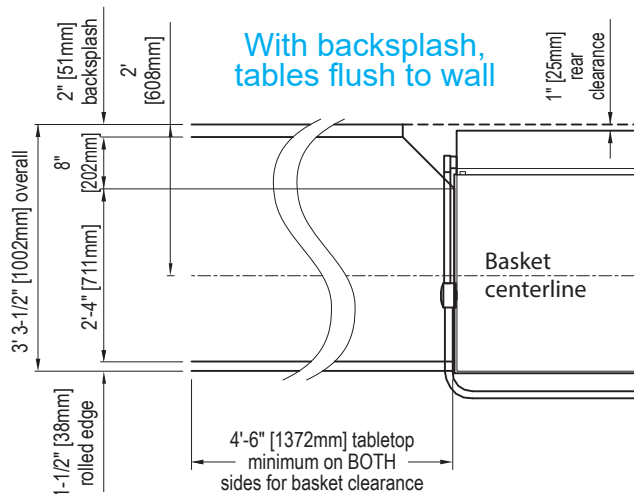

Recommended Tabling Construction

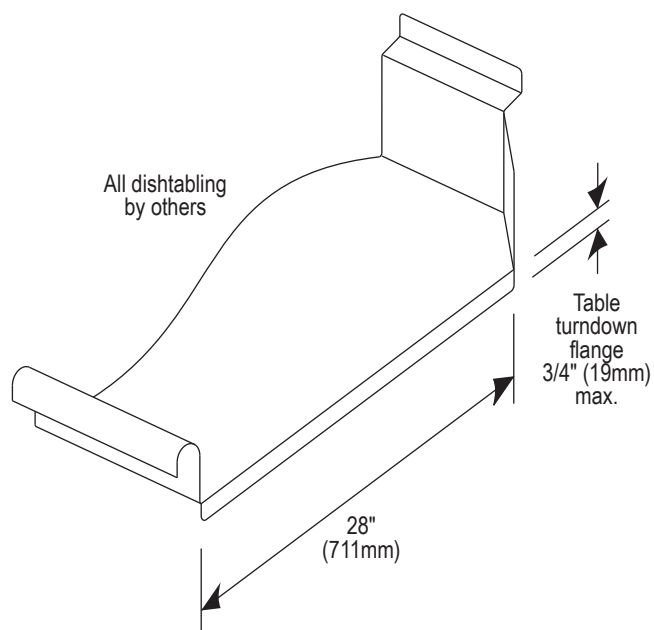

Technical Specifications

Optimum Capacity:			
Cycles per hour			15
Optimum Cycle Time (Seconds):			
Wash Cycle			204
Dwell / Drain Time			26
Rinse Cycle			10
Total Cycle			240
Water Requirements:			
Incoming Water Temperature (Optimum)			140°F (60°C)
Recommended Water Hardness			1-6 grains per U.S. gal.
Water Consumption per Rack			2.55 gals. (9.65 liters)
Water Consumption per Hour (max)			38.25 gals. (144.79 liters)
Flow Pressure			8.7-72.5 psi (0.6-5.0 bars)
Incoming Waterline			3/4" garden hose
Drain line size			7/8" ID, 1-1/8" OD flexible hose
Maximum drain flow rate			33 gals. (124.9 liters) per minute
Required Operating Temperatures:			
Wash (Minimum)			150°F (66°C)
Rinse (Minimum)			180°F (82°C)
Tank Capacities:			
Wash Tank			26.42 gals. (100 liters)
Booster Heater			4.76 gals. (18 liters)
Electrical Requirements:			
Wash Tank Heat			12 kW
Booster Heater			18 kW
Wash Pump			2 x 3 HP (2 x 2.2 kW)
Drain Pump			0.09 hp (0.07 kW)
Electrical supply	Peak load ampacity	Min. supply circuit ampacity	Max. breaker/disconnect
208-230V/	86.8A @ 208V	125A	125A
60Hz/3Ph	94.0A @ 230V	125A	125A
460V/60Hz/3Ph	46.6A @ 460V	60A	60A
Dimensions:			
Overall (W x D x H)			58-5/8" x 39-1/4" x 71-7/8"
			(1490 x 995 x 1827mm)
Ware Clearances			50-1/2" x 26" x 24"
(inside basket, W x D x H)			(1280 x 660 x 610mm)
Wall Clearance			Rear 1" (25mm) min.
Machine / Shipping Details:			
Shipping Weight			1125 lbs. (510.3 kg)
Shipping Size (W x D x H)			72" x 56" x 78"
			(1830 x 1423 x 1982mm)
This machine may not pass through standard doorways without machine disassembly or doorway modification. Check all dimensions carefully prior to ordering, or contact MEIKO at sales@meiko.us for assistance.			

Specification

DV 270.2 Item Number _____

Unit will be an NSF and ETL-listed MEIKO DV 270.2 hot water sanitizing pass-through door type pot and pan washer.

Operating voltage will be:

____ 208-230 V / 60Hz / 3 Ph

____ 460 V / 60 Hz / 3 Ph

Unit will have front mounted microcomputer controls, a 240 second total time cycle, and utilize 2.55 gallons (9.65liters) fresh rinse water per cycle. Unit will utilize a fresh water pumped rinse for constant pressure and temperature every cycle. Unit will have oscillating wash arms to ensure complete coverage of ware as well as enhanced performance. Unit will have integral wash tank soil removal system to maintain clean wash water. Unit will have built-in temperature safeguards to guarantee final rinse temperature meets minimum 180°F (82°C) requirement. Wash pumps will be equipped with a soft start feature to reduce risk of chipped or broken ware. Unit will incorporate features to stop operation and turn off water fill valve if an internal leak is detected. Unit will have variable time cycles for heavier than normal soil loads.

“Auto Safe” Feature

The DV 270.2 guarantees that the minimum NSF 180°F (82°C) sanitizing final rinse temperature is achieved regardless of the incoming water temperature, even if connected to a cold water line, by automatically extending the wash cycle (if necessary) to provide additional heating time. Listed cycle length assumes use of recommended 140°F (60°C) water supply. Exact cycle length is dependent upon the incoming water temperature and on the electrical supply voltage.

Note: All specifications are subject to change without notice based on MEIKO’s dedicated product improvement program.

This dishwasher is compliant with the Reduction of Lead in Drinking Water Act (2011) amendment to the Safe Drinking Water Act (SDWA).

