



HIGH TEMPERATURE SINGLE RACK POT WASHER

PT-15

High Temperature
Pot Washer



FEATURES

- 4 Cycles; 5 minute, 6 minute, 8 minute & 10 minute.
- Fully automatic cycle for easy operation.
- 5" touch display constantly informs user of machine status. Controls are easy to understand and simple to operate.
- Double skin for quiet operation.
- Auto start/stop makes operation safe and easy.
- Integrated scrap tray.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- Pumped final rinse.
- Stainless Steel scrap tray, long lasting.
- Unique spray arm system features upper and lower stainless steel wash arms.
- Large 31-3/4" height accommodates large pots and sheet pans.
- Includes 21-3/4" X 26-1/4" stainless steel rack.
- Uses 1.1 gallons per cycle.
- Standard gravity drain.

CMA
MIZER
Registered Trademark




PT-15

High Temperature
Single Rack Pot Washer

WARNINGS:

- Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

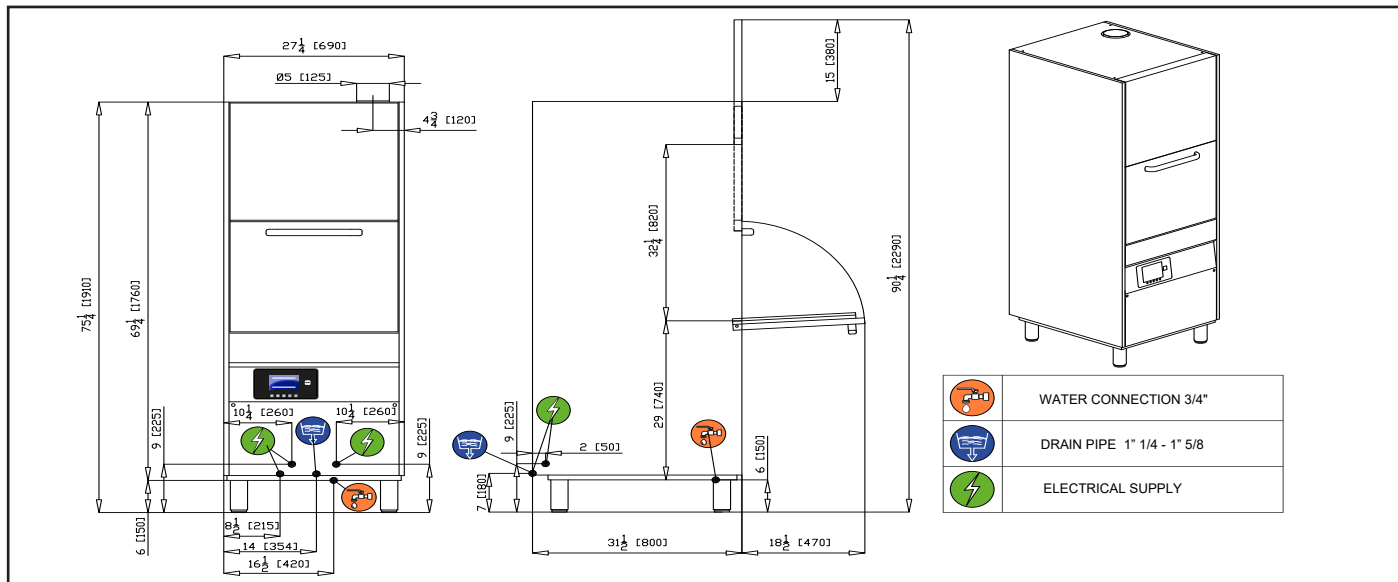

Specifications:

MODEL PT-15	USA	METRIC	USA	METRIC
WATER CONSUMPTION			DIMENSIONS	
PER RACK	1.1 GAL	4.2 L	DEPTH	31-1/2" 80.0cm
12 Racks per hour	13.2 GAL	50.0 L	WIDTH (OUTSIDE DIMENSION)	27-1/4" 69.0cm
10 Racks per hour	11.0 GAL	41.6 L	TOTAL HEIGHT WITH DOOR OPEN	90-1/4" 229.0cm
7 Racks per hour	7.7 GAL	29.1 L	MAX CLEARANCE FOR DISHES	31-3/4" 80.5cm
6 Racks per hour	6.6 GAL	25.0 L	DRAIN CONNECTION (OFF FLOOR)	6" 15.2cm
			DISHRACK DIMENSIONS 21-3/4" x 26-1/4" 55.0 x 66.5cm	
OPERATING CAPACITY				
RACKS PER HOUR	12/10/7/6	12/10/7/6		
WASH TANK CAPACITY 13.2 GAL 50.0 L			ELECTRICAL RATING	
PUMP CAPACITY 250 GPM 950 LPM			VOLTS	PHASE
				AMPS
WATER REQUIREMENTS			WITH BOOSTER	
WATER INLET	3/4"	1.9cm	208	3
DRAIN CONNECTION	2"	5.1cm	240	3
OPERATING TEMPERATURE			APPROXIMATE SHIPPING WEIGHT 475#	
WASH-°F (MIN)	165°F	71°C		
RINSE-°F (MIN)	185°F	85°C	SHIPPING DIMENSIONS PALLET & BOX @ 45" X 40" X 77"	

Summary Specifications: Model PT-15

The model PT-15 single tank, high temperature pot washer is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. The PT-15 is NSF, UL, CUL approved. Constructed of stainless steel.

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



CMA Dishmachines 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 01-2025 CMA, Inc.

