


TOPOLOGY FOR VLAN

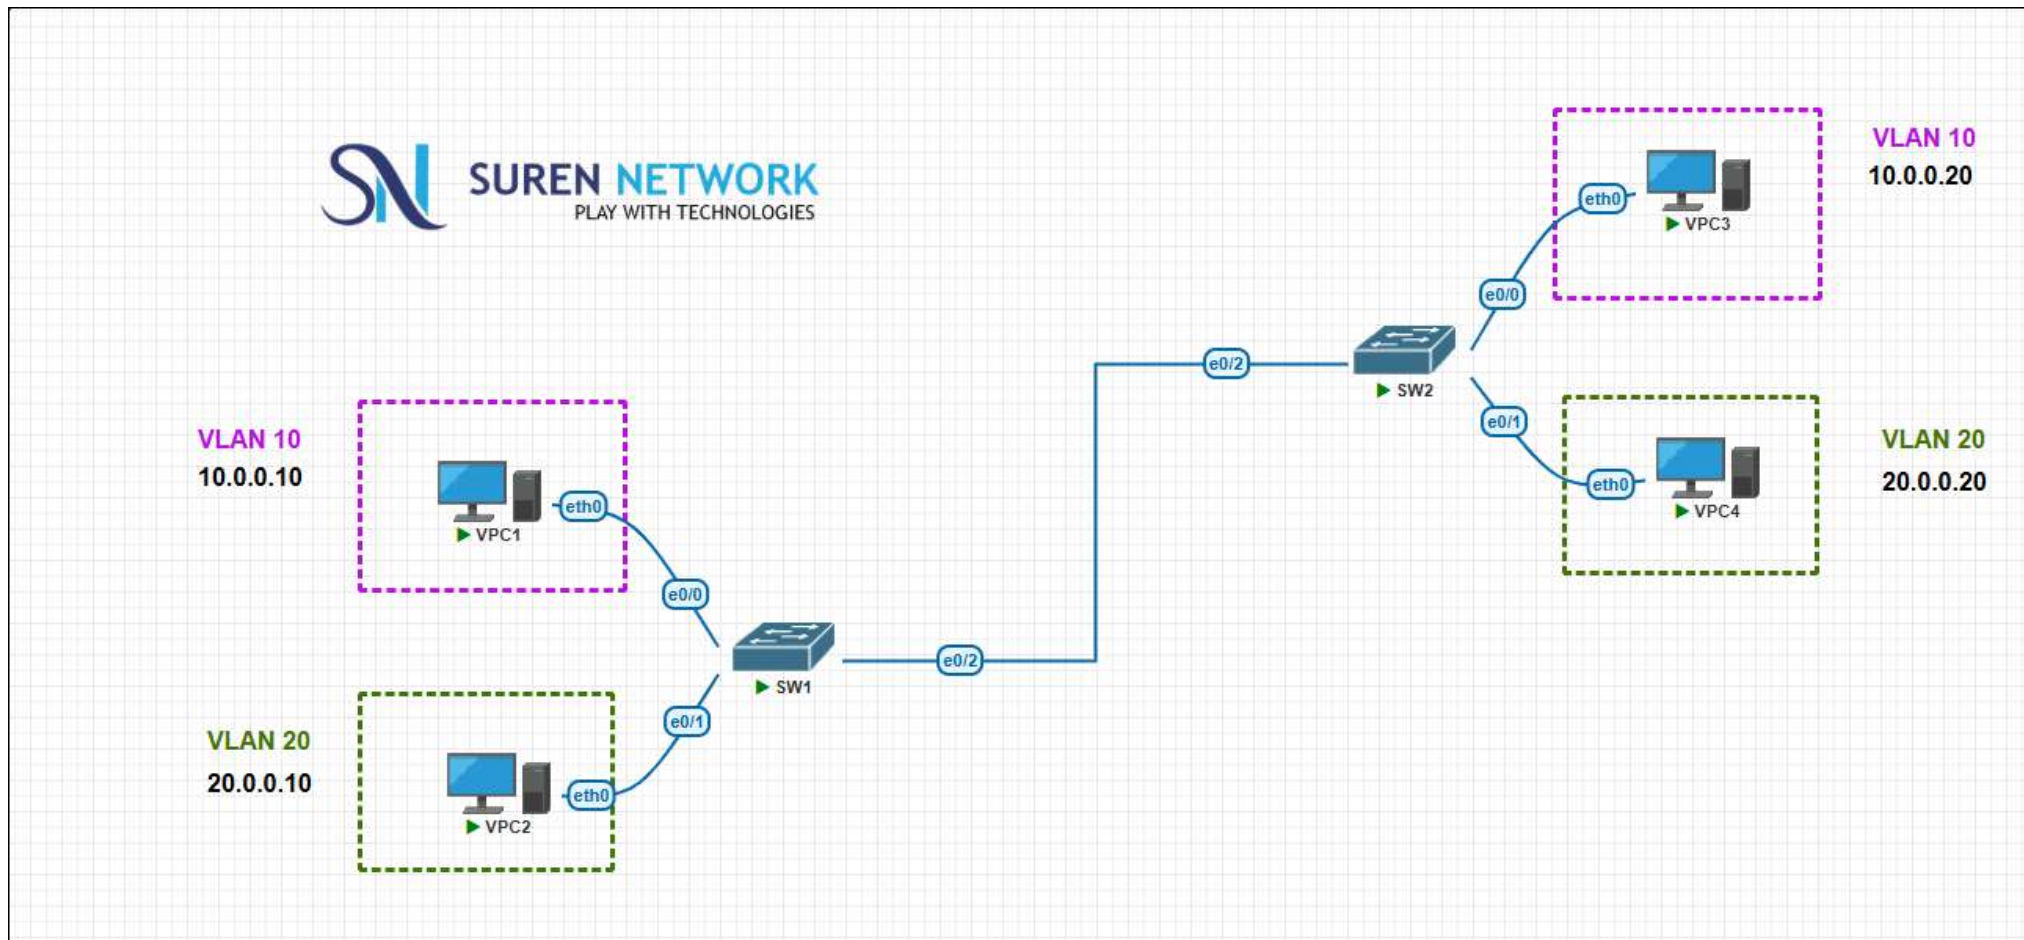

SWITCH 1&2 Configuration

```
SW1
1    default                active    Et0/3
10   HR                    active    Et0/0
20   SALES                  active    Et0/1
1002 fddi-default           act/unsup
1003 token-ring-default     act/unsup
1004 fddinet-default        act/unsup
1005 trnet-default          act/unsup
SW1#show trunk
*Aug 11 02:22:48.944: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
SW1#show int trunk

Port      Mode          Encapsulation  Status        Native vlan
Et0/2     on            802.1q         trunking      1

Port      Vlans allowed on trunk
Et0/2     1-4094

Port      Vlans allowed and active in management domain
Et0/2     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Et0/2     1,10,20
SW1#
```

```
SW2
Port      Mode          Encapsulation  Status        Native vlan
Et0/2     on            802.1q         trunking      1


Port      Vlans allowed on trunk
Et0/2     1-4094

Port      Vlans allowed and active in management domain
Et0/2     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Et0/2     1,10,20
SW2#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Et0/3
10   HR                    active    Et0/0
20   SALES                  active    Et0/1
1002 fddi-default           act/unsup
1003 token-ring-default     act/unsup
1004 fddinet-default        act/unsup
1005 trnet-default          act/unsup
SW2#
```

Network Using Trunk Protocol

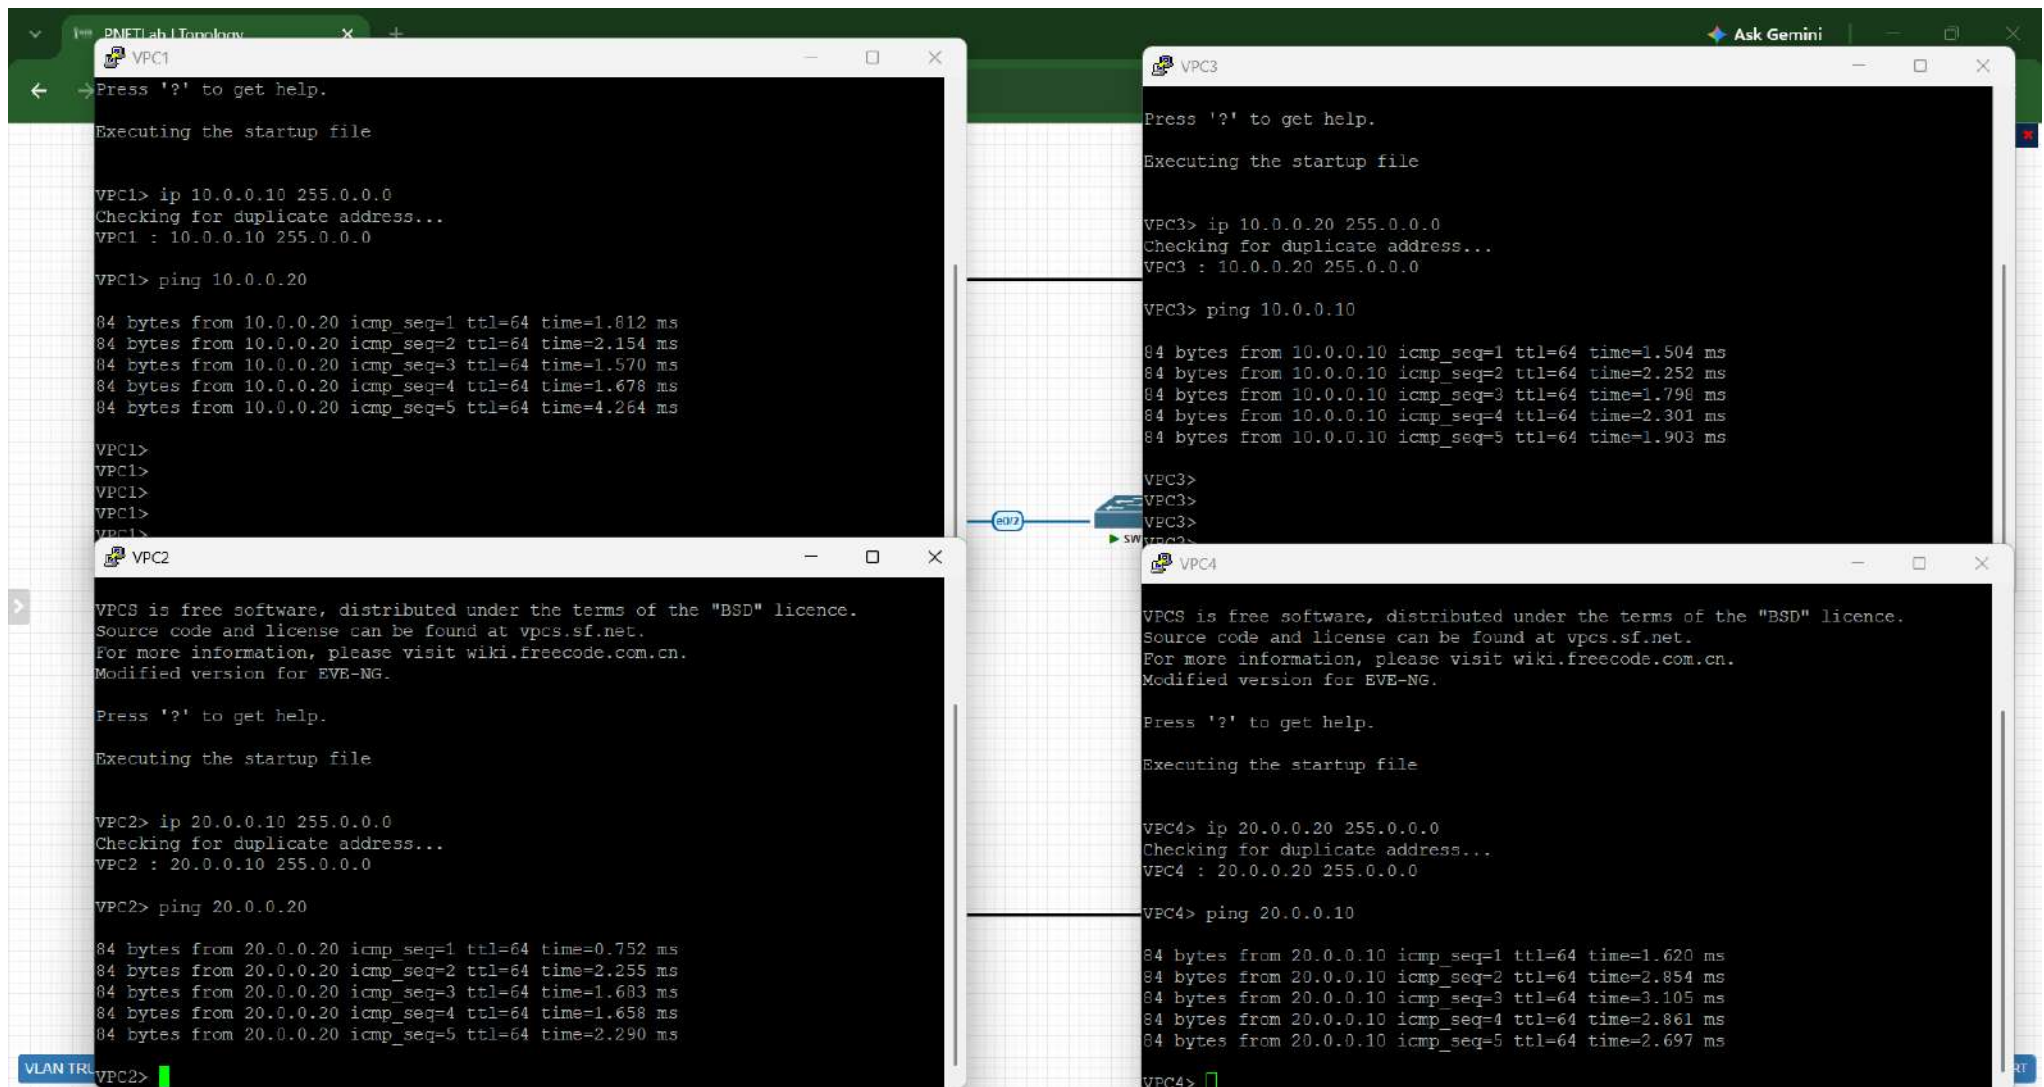

```
Press '?' to get help.
Executing the startup file

VPC1> ip 10.0.0.10 255.0.0.0
Checking for duplicate address...
VPC1 : 10.0.0.10 255.0.0.0

VPC1> ping 10.0.0.20

84 bytes from 10.0.0.20 icmp_seq=1 ttl=64 time=1.812 ms
84 bytes from 10.0.0.20 icmp_seq=2 ttl=64 time=2.154 ms
84 bytes from 10.0.0.20 icmp_seq=3 ttl=64 time=1.570 ms
84 bytes from 10.0.0.20 icmp_seq=4 ttl=64 time=1.678 ms
84 bytes from 10.0.0.20 icmp_seq=5 ttl=64 time=4.264 ms

VPC1>
VPC1>
VPC1>
VPC1>
VPC1>

VPC2
VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC2> ip 20.0.0.10 255.0.0.0
Checking for duplicate address...
VPC2 : 20.0.0.10 255.0.0.0

VPC2> ping 20.0.0.20

84 bytes from 20.0.0.20 icmp_seq=1 ttl=64 time=0.752 ms
84 bytes from 20.0.0.20 icmp_seq=2 ttl=64 time=2.255 ms
84 bytes from 20.0.0.20 icmp_seq=3 ttl=64 time=1.603 ms
84 bytes from 20.0.0.20 icmp_seq=4 ttl=64 time=1.658 ms
84 bytes from 20.0.0.20 icmp_seq=5 ttl=64 time=2.290 ms

VLAN TRUNK
VPC2>

VPC3
Press '?' to get help.
Executing the startup file

VPC3> ip 10.0.0.20 255.0.0.0
Checking for duplicate address...
VPC3 : 10.0.0.20 255.0.0.0

VPC3> ping 10.0.0.10

84 bytes from 10.0.0.10 icmp_seq=1 ttl=64 time=1.504 ms
84 bytes from 10.0.0.10 icmp_seq=2 ttl=64 time=2.252 ms
84 bytes from 10.0.0.10 icmp_seq=3 ttl=64 time=1.798 ms
84 bytes from 10.0.0.10 icmp_seq=4 ttl=64 time=2.301 ms
84 bytes from 10.0.0.10 icmp_seq=5 ttl=64 time=1.903 ms

VPC3>
VPC3>
VPC3>
VPC3>
VPC3>

VPC4
VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC4> ip 20.0.0.20 255.0.0.0
Checking for duplicate address...
VPC4 : 20.0.0.20 255.0.0.0

VPC4> ping 20.0.0.10

84 bytes from 20.0.0.10 icmp_seq=1 ttl=64 time=1.620 ms
84 bytes from 20.0.0.10 icmp_seq=2 ttl=64 time=2.854 ms
84 bytes from 20.0.0.10 icmp_seq=3 ttl=64 time=3.105 ms
84 bytes from 20.0.0.10 icmp_seq=4 ttl=64 time=2.861 ms
84 bytes from 20.0.0.10 icmp_seq=5 ttl=64 time=2.697 ms

VPC4>
```