


TOPOLOGY FOR RIP IN ROUTER

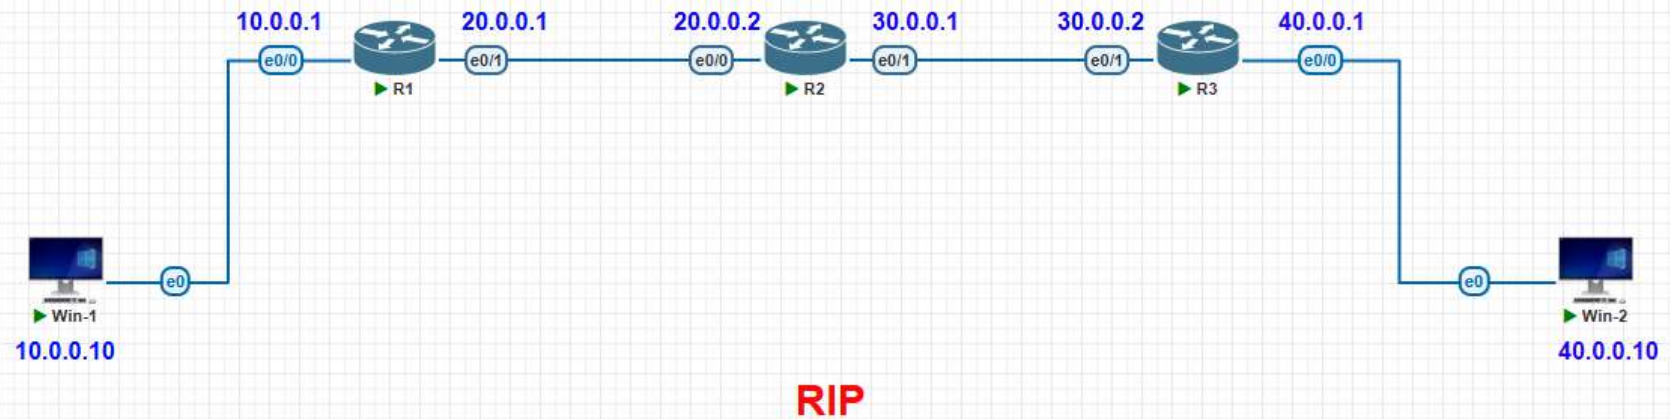

Configuration in ROUTER

R1

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/8 is directly connected, Ethernet0/0
L 10.0.0.1/32 is directly connected, Ethernet0/0
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/1
L 20.0.0.1/32 is directly connected, Ethernet0/1
R 30.0.0.0/8 [120/1] via 20.0.0.2, 00:00:21, Ethernet0/1
R 40.0.0.0/8 [120/2] via 20.0.0.2, 00:00:21, Ethernet0/1
R1#
*Aug 17 09:14:11.037: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Configuration Wizard)
R1#

R2

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

R 10.0.0.0/8 [120/1] via 20.0.0.1, 00:00:07, Ethernet0/0
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/0
L 20.0.0.2/32 is directly connected, Ethernet0/0
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.1/32 is directly connected, Ethernet0/1
R 40.0.0.0/8 [120/1] via 30.0.0.2, 00:00:17, Ethernet0/1
R2#

R3

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

R 10.0.0.0/8 [120/2] via 30.0.0.1, 00:00:11, Ethernet0/1
R 20.0.0.0/8 [120/1] via 30.0.0.1, 00:00:11, Ethernet0/1
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.2/32 is directly connected, Ethernet0/1
40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 40.0.0.0/8 is directly connected, Ethernet0/0
L 40.0.0.1/32 is directly connected, Ethernet0/0
R3#

Physical 01:00:00 START

