




DASCOM LED LIGHTING SOLUTIONS

LED Downlight 1000 Series

Application: Shopping Mall, Meeting Room, Retail Store,
Exhibition Hall, Home Lighting and Hotels

SONARAY




LED Downlight


DL-1007 (2.5" With Transparent Cover)

CE RoHS IP20

Power: 7W
 Luminous Flux: 497~518lm
 Luminous Efficacy: 71l~74lm/w
 Color Temperature: 3000K/4000K
 CRI: ≥80
 Beam Angle: 25°
 Material: Aluminum
 Housing Color: White
 Power Supply: External
 Input Voltage: DC30-40V
 Input Current: 160mA
 Dimming: 20~100%
 Weight: 220g
 Operation Temperature: -20°C ~ +40°C
 Average Lifetime: ≥35000hrs

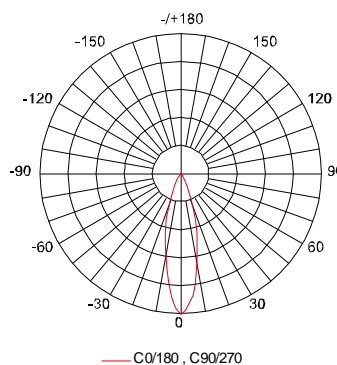

H(m)	E(lx)	D(cm)
1	1179	50
2	294	100
3	131	150
4	73	200




LED Downlight


DL-1007 (2.5" With Reflector only)

CE RoHS IP20

Power: 7W
 Luminous Flux: 518~532lm
 Luminous Efficacy: 74l~76lm/w
 Color Temperature: 3000K/4000K
 CRI: ≥80
 Beam Angle: 25°
 Material: Aluminum
 Housing Color: White
 Power Supply: External
 Input Voltage: DC30-40V
 Input Current: 160mA
 Dimming: 20~100%
 Weight: 220g
 Operation Temperature: -20°C ~ +40°C
 Average Lifetime: ≥35000hrs

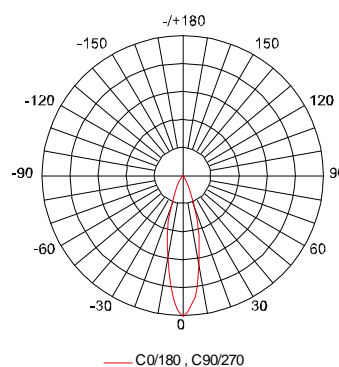

H(m)	E(lx)	D(cm)
1	1554	50
2	388	100
3	172	150
4	97	200




LED Downlight


DL-1015 (3" With Transparent Cover)

CE RoHS IP20

Power: 15W
 Luminous Flux: 945~1005lm
 Luminous Efficacy: 63lm/w
 Color Temperature: 3000K/4000K
 CRI: ≥80
 Beam Angle: 40°
 Material: Aluminum
 Housing Color: White
 Power Supply: External
 Input Voltage: DC30-40V
 Input Current: 340mA
 Dimming: 20~100%
 Weight: 340g
 Operation Temperature: -20°C ~ +40°C
 Average Lifetime: ≥35000hrs

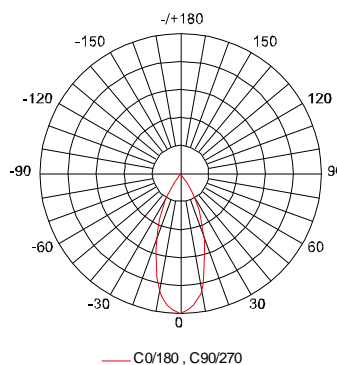

H(m)	E(lx)	D(cm)
1	1247	80
2	331	160
3	138	240
4	77	320




LED Downlight


DL-1015 (3" With Reflector only)

CE RoHS IP20

Power: 15W
 Luminous Flux: 960~1050lm
 Luminous Efficacy: 64-70lm/w
 Color Temperature: 3000K/4000K
 CRI: ≥ 80
 Beam Angle: 40°
 Material: Aluminum
 Housing Color: White
 Power Supply: External
 Input Voltage: DC30-40V
 Input Current: 340mA
 Dimming: 20~100%
 Weight: 340g
 Operation Temperature: $-20^\circ\text{C} \sim +40^\circ\text{C}$
 Average Lifetime: $\geq 35000\text{hrs}$

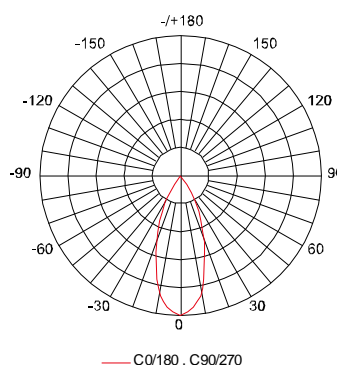

H(m)	E(lx)	D(cm)
1	1433	80
2	358	160
3	159	240
4	89	320




LED Downlight

DL-1020 (4" With Transparent Cover)


CE RoHS IP20

Power: 20W
 Luminous Flux:
 1200~1260lm(40°), 1260~1420lm(80°)
 Luminous Efficacy: 63~71lm/w
 Color Temperature: 3000K/4000K
 CRI: ≥80
 Beam Angle: 40°/80°
 Material: Aluminum
 Housing Color: White
 Power Supply: External
 Input Voltage: DC30-40V
 Input Current: 460mA
 Dimming: 20~100%
 Weight: 550g
 Operation Temperature: -20°C ~ +40°C
 Average Lifetime: ≥35000hrs

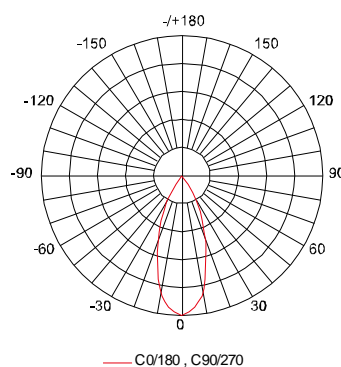

4000K 40°		
H(m)	E (lx)	D(cm)
1	1262	80
2	315	160
3	140	240
4	80	320

4000K 80°		
H(m)	E (lx)	D(cm)
1	663	200
2	165	400
3	73	600
4	42	800




LED Downlight

DL-1020 (4" With Reflector only)

CE RoHS IP20

Power: 20W
 Luminous Flux: 1260-1400lm
 Luminous Efficacy: 63-70lm/w
 Color Temperature: 3000K/4000K
 CRI: ≥ 80
 Beam Angle: 40°
 Material: Aluminum
 Housing Color: White
 Power Supply: External
 Input Voltage: DC30-40V
 Input Current: 460mA
 Dimming: 20~100%
 Weight: 550g
 Operation Temperature: -20°C ~ +40°C
 Average Lifetime: ≥ 35000 hrs

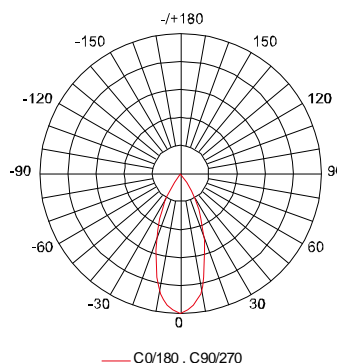

H(m)	E(lx)	D(cm)
1	1400	80
2	405	160
3	150	240
4	85	320