






DASCOM LED LIGHTING SOLUTIONS

LED LIGHT STRIP

Applications: Jewelry Products \Cosmetics Counters, Advertising
Lighting Boxes, Stores Decoration

SONARAY

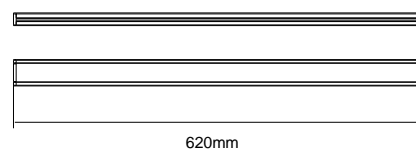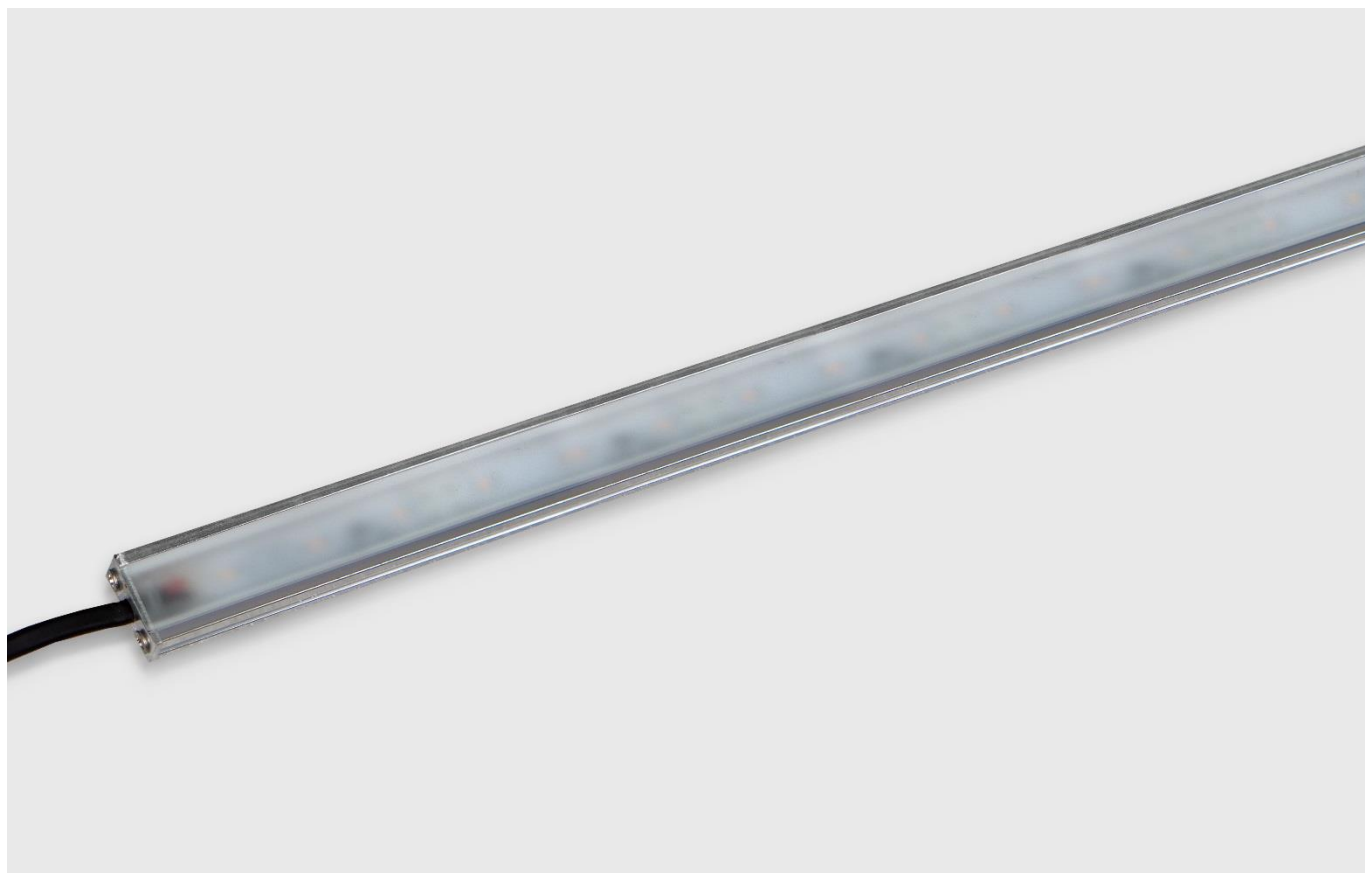


LED LIGHT STRIP




LS-2007

IP20

Power: 7.2W
 Luminous Flux: 510lm
 Luminous Efficacy: 70lm/w
 Color Temperature: 6300K
 CRI: ≥ 65
 Beam Angle: $105^{\circ} \times 100^{\circ}$
 Material: Aluminum
 Power Supply: External
 Input Voltage: DC12V
 Input Current: 580mA
 Weight: 130g
 Operation Temperature: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 Design Lifespan : $\geq 60000\text{hrs}$

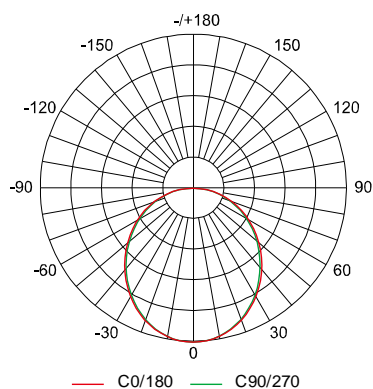

| H(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1 | 197 | 226 |
| 2 | 49 | 453 |
| 3 | 22 | 679 |
| 4 | 12 | 906 |

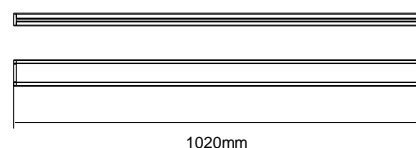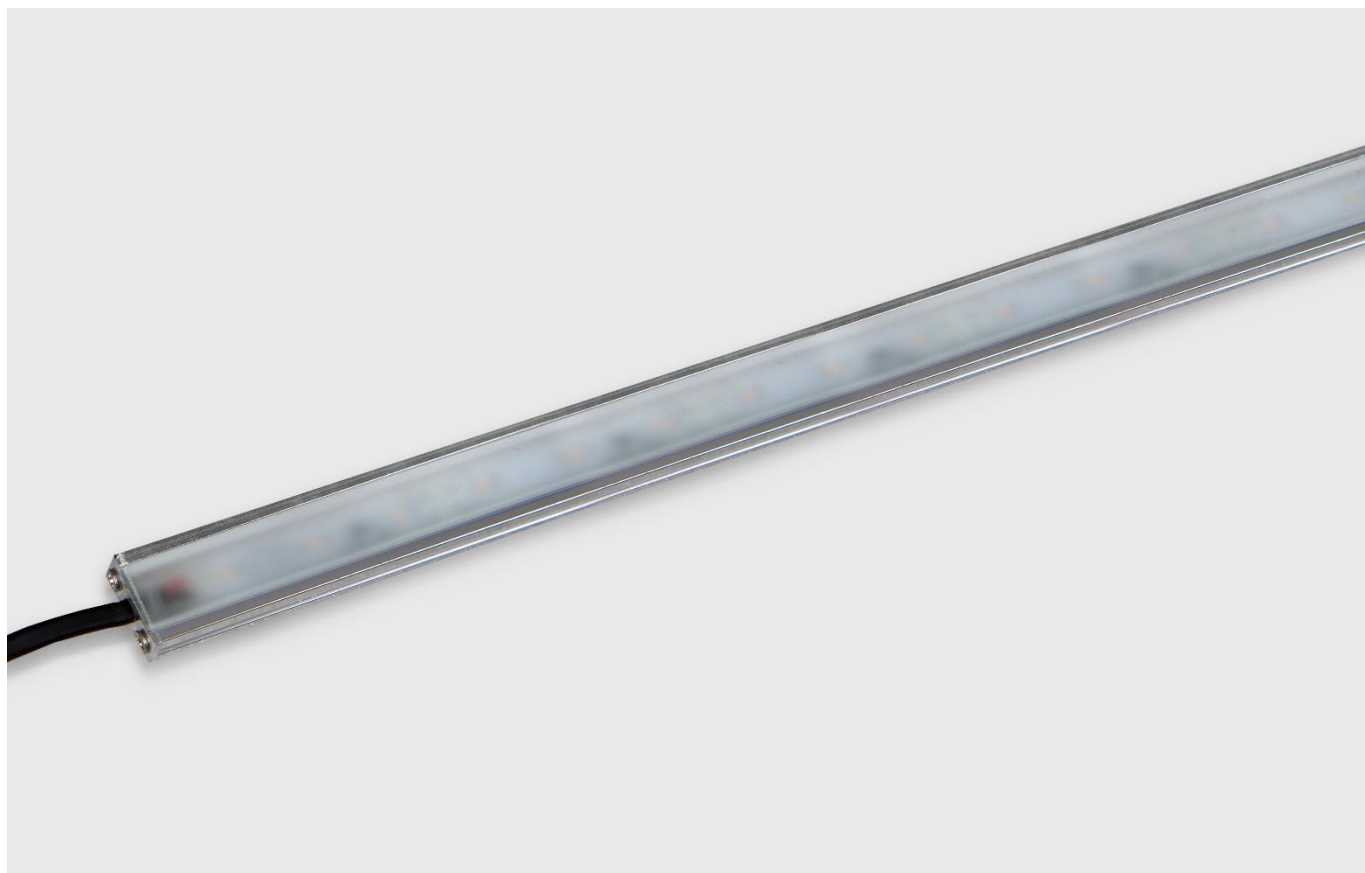


LED LIGHT STRIP




LS-2012

IP20

Power: 12W
 Luminous Flux: 840lm
 Luminous Efficacy: 70lm/w
 Color Temperature: 6300K
 CRI: ≥ 65
 Beam Angle: $105^{\circ} \times 100^{\circ}$
 Material: Aluminum
 Power Supply: External
 Input Voltage: DC12V
 Input Current: 1A
 Weight: 200g
 Operation Temperature: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 Design Lifespan : $\geq 60000\text{hrs}$

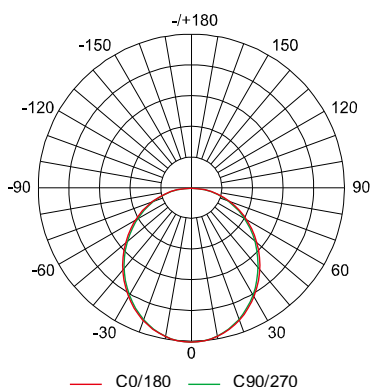

| H(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1 | 240 | 262 |
| 2 | 60 | 525 |
| 3 | 26 | 787 |
| 4 | 15 | 1060 |

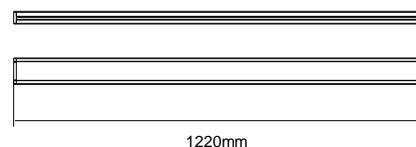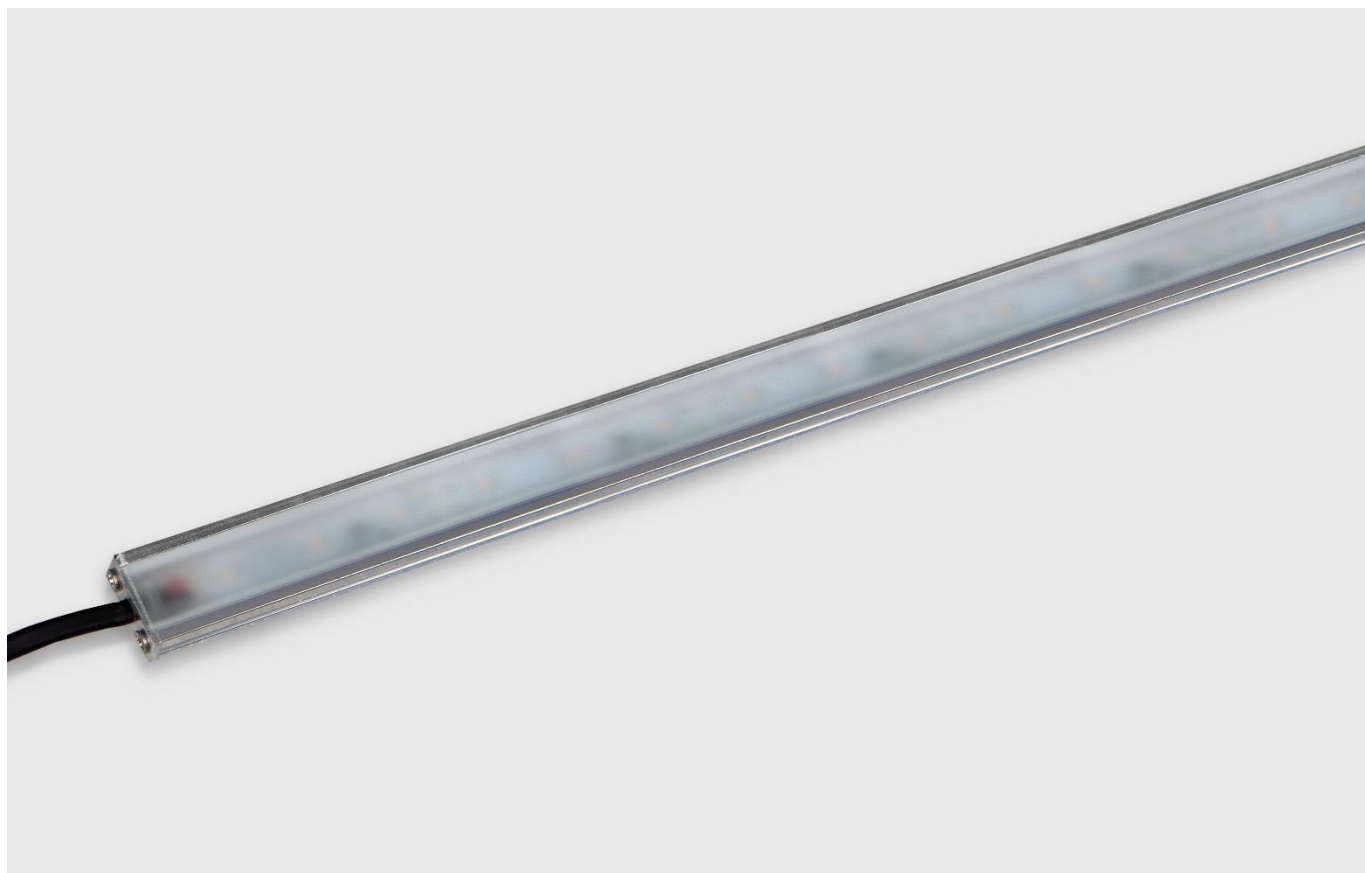


LED LIGHT STRIP



LS-2014

IP20

Power: 14.4W
 Luminous Flux: 872lm
 Luminous Efficacy: 61lm/w
 Color Temperature: 6300K
 CRI: ≥ 65
 Beam Angle: $105^{\circ} \times 100^{\circ}$
 Material: Aluminum
 Power Supply: External
 Input Voltage: DC12V
 Input Current: 1.16A
 Weight: 230g
 Operation Temperature: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 Design Lifespan : $\geq 60000\text{hrs}$

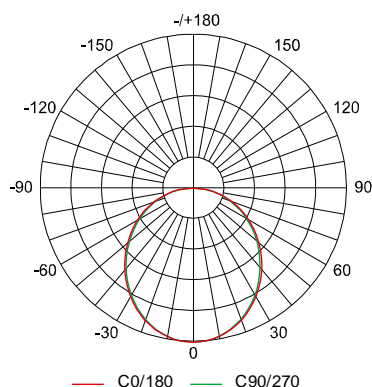

| H(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1 | 326 | 227 |
| 2 | 81 | 454 |
| 3 | 26 | 681 |
| 4 | 20 | 908 |

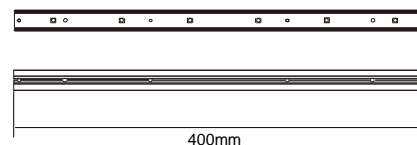


LED LIGHT STRIP

LS-1007

IP20

Power: 6.7W
 Luminous Flux: 670lm
 Luminous Efficacy: 100lm/w
 Color Temperature: 7000K
 CRI: ≥ 85
 Beam Angle: $115^{\circ} \times 115^{\circ}$
 Material: Aluminum
 Power Supply: External
 Input Voltage: DC19.5V
 Input Current: 350mA
 Weight: 145g
 Operation Temperature: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 Design Lifespan : $\geq 60000\text{hrs}$

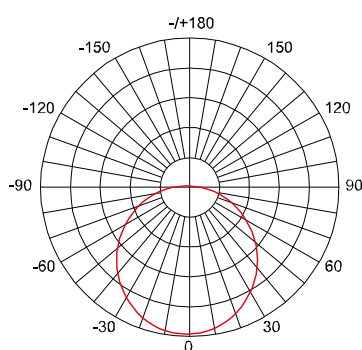

| H(m) | E(lx) | D(cm) |
|------|-------|-------|
| 1 | 205 | 310 |
| 2 | 52 | 620 |
| 3 | 22 | 930 |
| 4 | 13 | 1240 |