





BRIGHTSCAPE 1000 LED FLOOD LIGHT



Big Light, Low Glare

It is different from the common low wattage Flood Light in the market. The big diffuser covering the array of LEDs provides a better light distribution while effectively reducing the glare and discomfort.



Wall mounting

This luminaire is good for general lighting installations, and is easily mounted on walls. It is also useful as supplementary lighting, such as over work surfaces (in a warehouse, factory, or where ever you like).



Energy Saving

The combination of high-efficacy LED components with excellent whole system design has SONARAY LED lighting achieving energy savings of 40% - 80% compared with traditional lighting sources.



Complies with Multinational Certifications

Approved by authorized national laboratories for UL (USA and Canada), CE (Europe) and RCM (Australia).



Quality Core Component

Excellent luminaire design to the core: starting with the LED packages themselves. These luminaires only use high quality SMD packages from CITILED – chipsets that have great quality and long life as backed by LM-80 and TM-21 reports. Quality inside the luminaires that shines from the outside.



Desirable CRI

With a CRI of 80 SONARAY's Light Bar brings out the colors you want where ever and however you decide to install it.

SONARAY™


BRIGHTSCAPE 1000 LED FLOOD LIGHT

SONARAY™



Specifications

Material: Aluminum
Driver: Built-in
Input Voltage: AC 90-277V~50/60Hz
Power Factor: ≥ 0.9
Operating Temperature: -20°C~+40°C, -4°F~+104°F
Lifetime: $\geq 40,000$ hrs


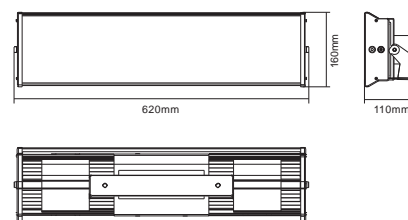


Color Temperature



Model No.	Power	Luminous Flux	Luminous Efficacy	Color Temperature	CRI	Beam Angle	Weight
	(W)	(lm)	(lm/W)	(K)	(Ra)	(°)	(kg/lb)
FL-1060E1-30	30	2580	85	5000	≥ 80	110	3.9/8.60
FL-1060E1-40	40	3312	83	5000	≥ 80	110	3.9/8.60

Light Distribution Curve

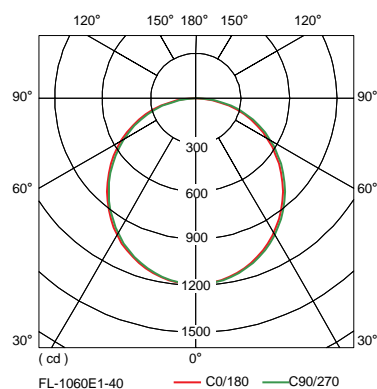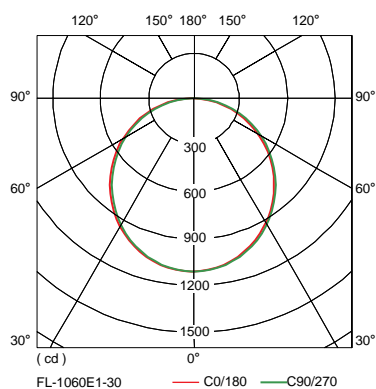

Illuminance Distribution

FL-1060E1-30		
1	902	293
2	226	586
3	100	880
4	56	1173
5	36	1465
H(m)	E(lx)	D(cm)

FL-1060E1-40		
1	1175	293
2	294	586
3	131	880
4	73	1173
5	47	1465
H(m)	E(lx)	D(cm)

www.sonarayled.com

© 2014 DASCOM LED LIGHTING (JIANGMEN) CO.,LTD. All rights reserved.

All company and product names are trademarks or registered trademarks of their respective owner. Specifications are subject to change without notice.

Version 1.0. Edited 2014.05