



DASCOM LED LIGHTING SOLUTIONS

External LED T8 Tube



Applications: Be widely used in shopping mall, restaurant, meeting rooms,exhibiton hall, advertising lighting and other places of lighting.



T8-1006

CE RoHS IP20

Power*: 6W
 Luminous Flux: 630lm
 Luminous Efficacy: 105lm/w
 Total Power*: 8W
 Circuit Efficacy: 79lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC40-46V
 Input Current: 150mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 175g
 Average Lifetime: ≥35000hrs

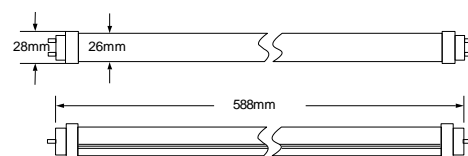
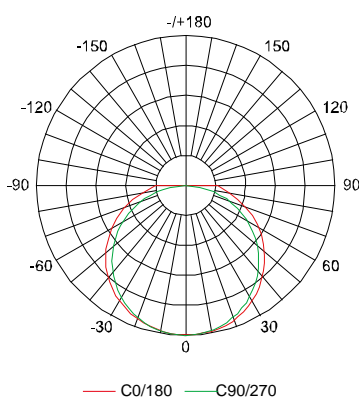




T8-1008

CE RoHS IP20

Power*: 8W
 Luminous Flux: 840lm
 Luminous Efficacy: 105lm/w
 Total Power*: 10W
 Circuit Efficacy: 84lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC34-40V
 Input Current: 220mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 175g
 Average Lifetime: ≥35000hrs

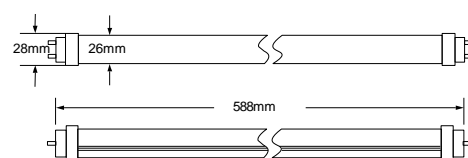
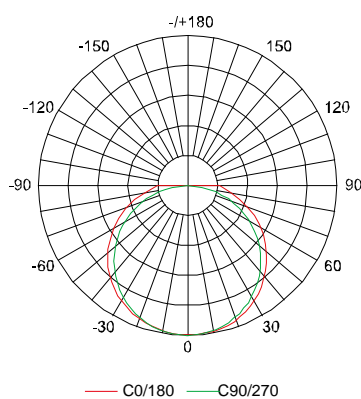




T8-1010

CE RoHS IP20

Power*: 10W
 Luminous Flux: 1000lm
 Luminous Efficacy: 100lm/w
 Total Power*: 12W
 Circuit Efficacy: 83lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC43-49V
 Input Current: 220mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 175g
 Average Lifetime: ≥35000hrs

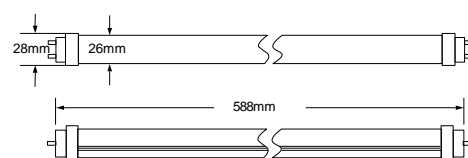
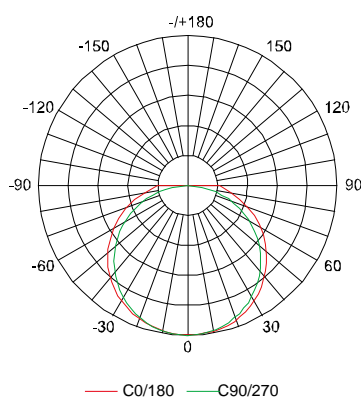




T8-1012

CE RoHS IP20

Power*: 12W
 Luminous Flux: 1308lm
 Luminous Efficacy: 109lm/w
 Total Power*: 15W
 Circuit Efficacy: 87lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC40-46V
 Input Current: 300mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 350g
 Average Lifetime: ≥35000hrs

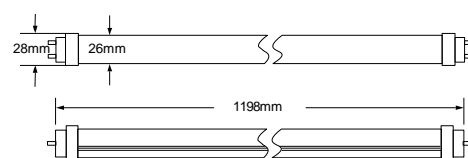
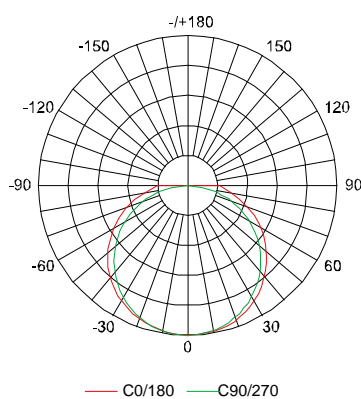




T8-1016

CE RoHS IP20

Power*: 16W
 Luminous Flux: 1776lm
 Luminous Efficacy: 111lm/w
 Total Power*: 19W
 Circuit Efficacy: 93lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC34-40V
 Input Current: 440mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 350g
 Average Lifetime: ≥35000hrs

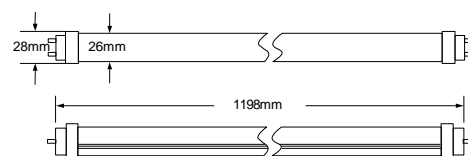
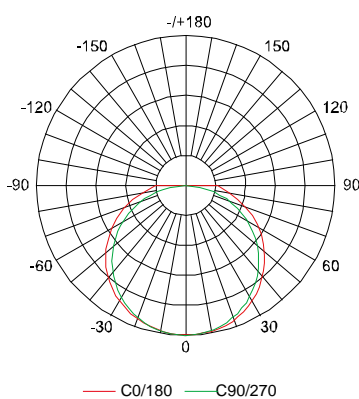




T8-1021

CE RoHS IP20

Power*: 21W
 Luminous Flux: 2205lm
 Luminous Efficacy: 105lm/w
 Total Power*: 24W
 Circuit Efficacy: 92lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC43-49V
 Input Current: 440mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 350g
 Average Lifetime: ≥35000hrs

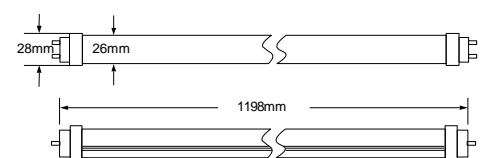
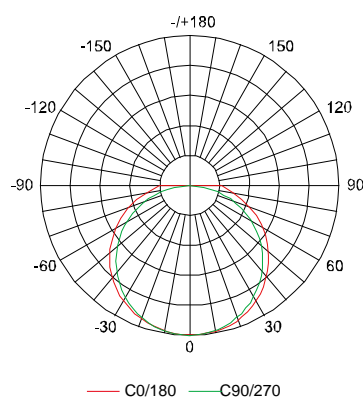




T8-1016c

CE RoHS IP20

Power*: 16W
 Luminous Flux: 1800lm
 Luminous Efficacy: 112lm/w
 Total Power*: 19W
 Circuit Efficacy: 95lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC37-43V
 Input Current: 420mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 350g
 Average Lifetime: ≥35000hrs

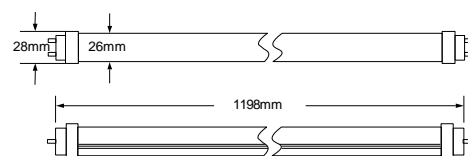
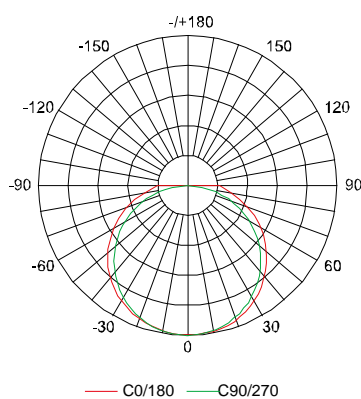




T8-1024c

CE RoHS IP20

Power*: 24W
 Luminous Flux: 2712lm
 Luminous Efficacy: 113lm/w
 Total Power*: 27W
 Circuit Efficacy: 100lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC40-46V
 Input Current: 560mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 350g
 Average Lifetime: ≥35000hrs

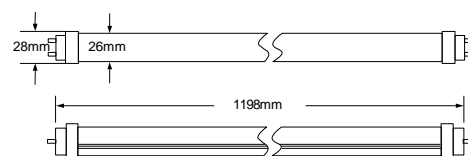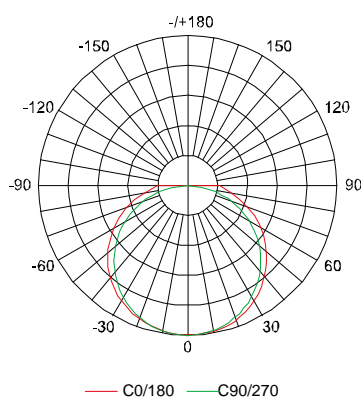



T8-1024

CE RoHS IP20

Power*: 24W
 Luminous Flux: 2688lm
 Luminous Efficacy: 112lm/w
 Total Power*: 27W
 Circuit Efficacy: 100lm/w
 Color Temperature: 6300K
 CRI: 63~80
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage: DC38-42V
 Input Current: 600mA
 Lamp Base: G13
 Cover: Matte Cover
 Weight: 460g
 Average Lifetime: ≥35000hrs

