




DASCOM LED LIGHTING SOLUTIONS

LED High Bay Light 2000 Series (Bell-shaped Lampshade)

High Ceiling Applications, Factories, Warehouse, Railway station, Gym, Supermarket


SONARAY

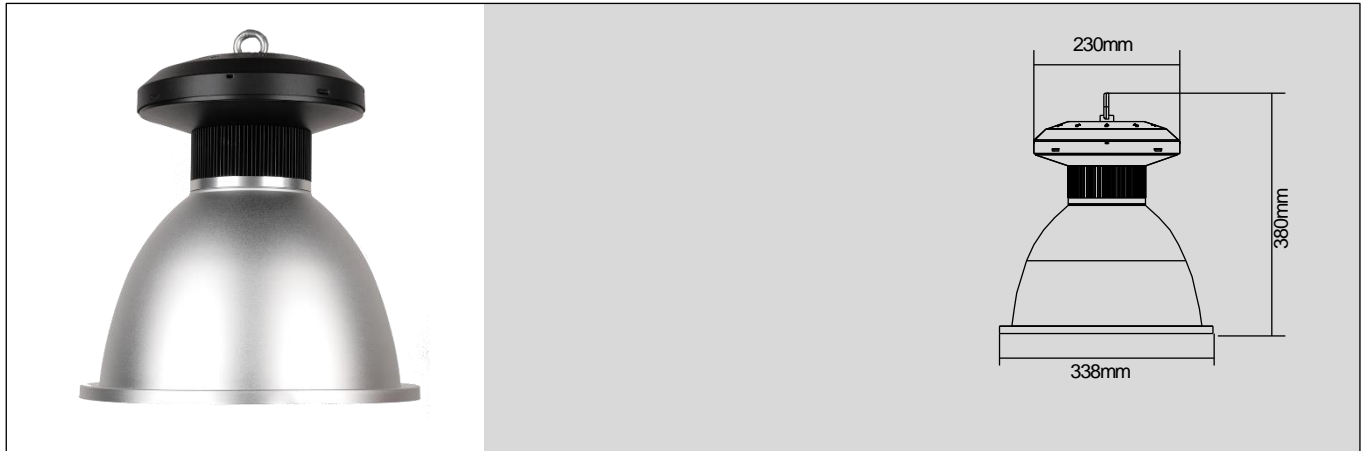


HB-A-2025


CE RoHS IP20

Power: 25W
 Luminous Flux: 2202lm
 Luminous Efficacy: 88lm/w
 Color Temperature: 5000K
 CRI: ≥ 80
 Beam Angle: 35°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V, 50/60Hz
 Power Factor: ≥ 0.9
 Weight: 2.7kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifetime: ≥ 60000 hrs

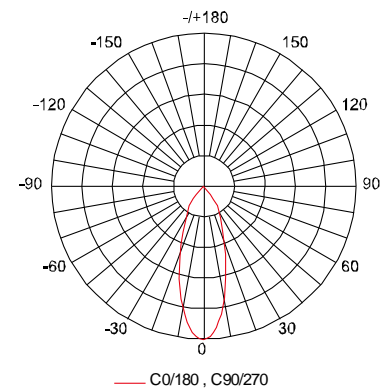

Illuminance Distribution

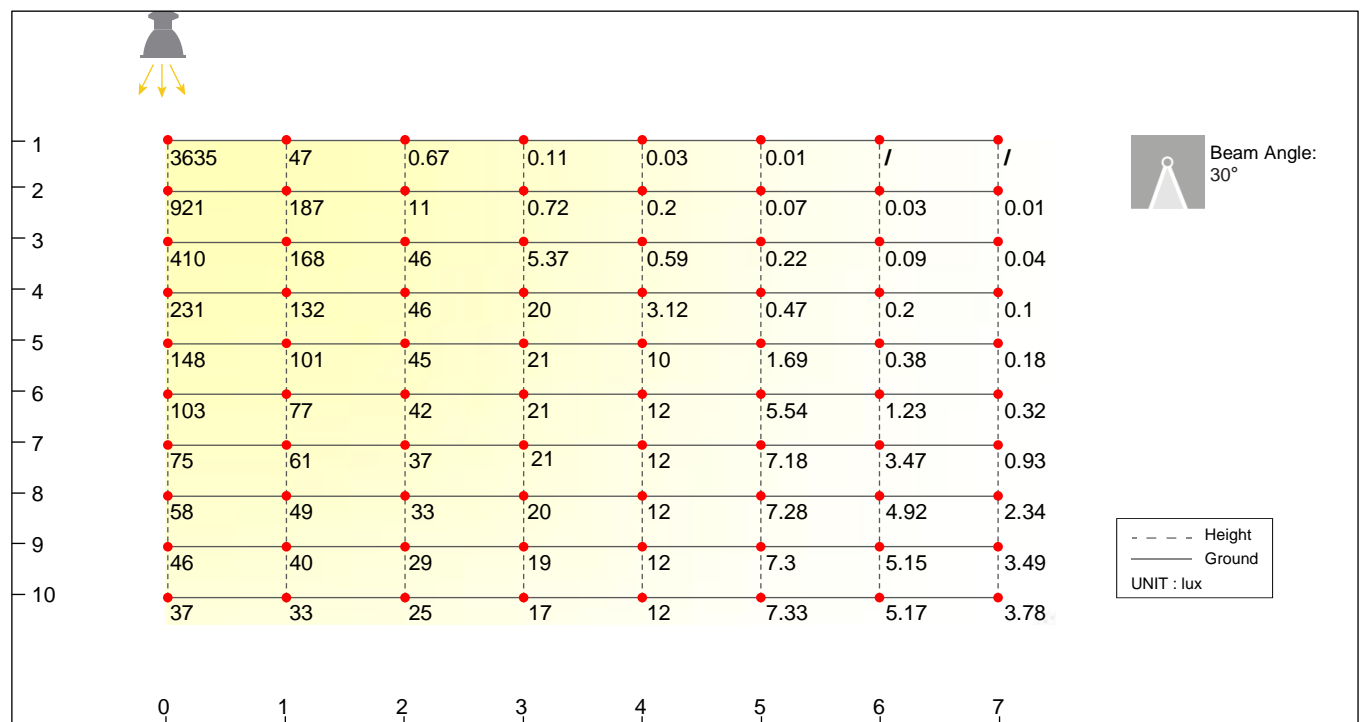


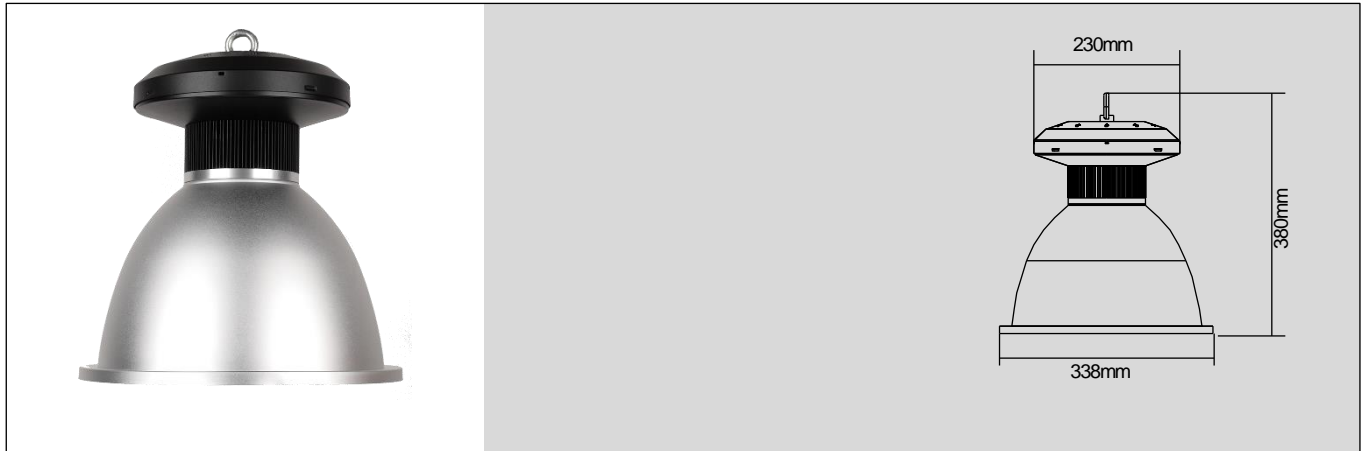


HB-A-2035


CE RoHS IP20

Power: 35W
 Luminous Flux: 2923lm
 Luminous Efficacy: 84lm/w
 Color Temperature: 5000K
 CRI: ≥80
 Beam Angle: 35°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V,50/60Hz
 Power Factor: ≥0.9
 Weight: 2.7kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifetime: ≥60000hrs

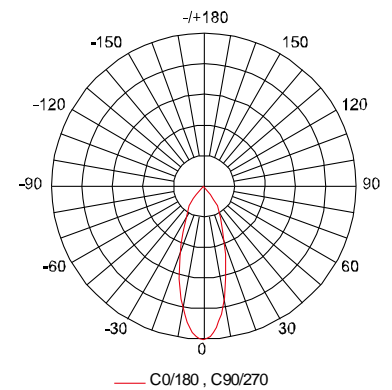


Illuminance Distribution

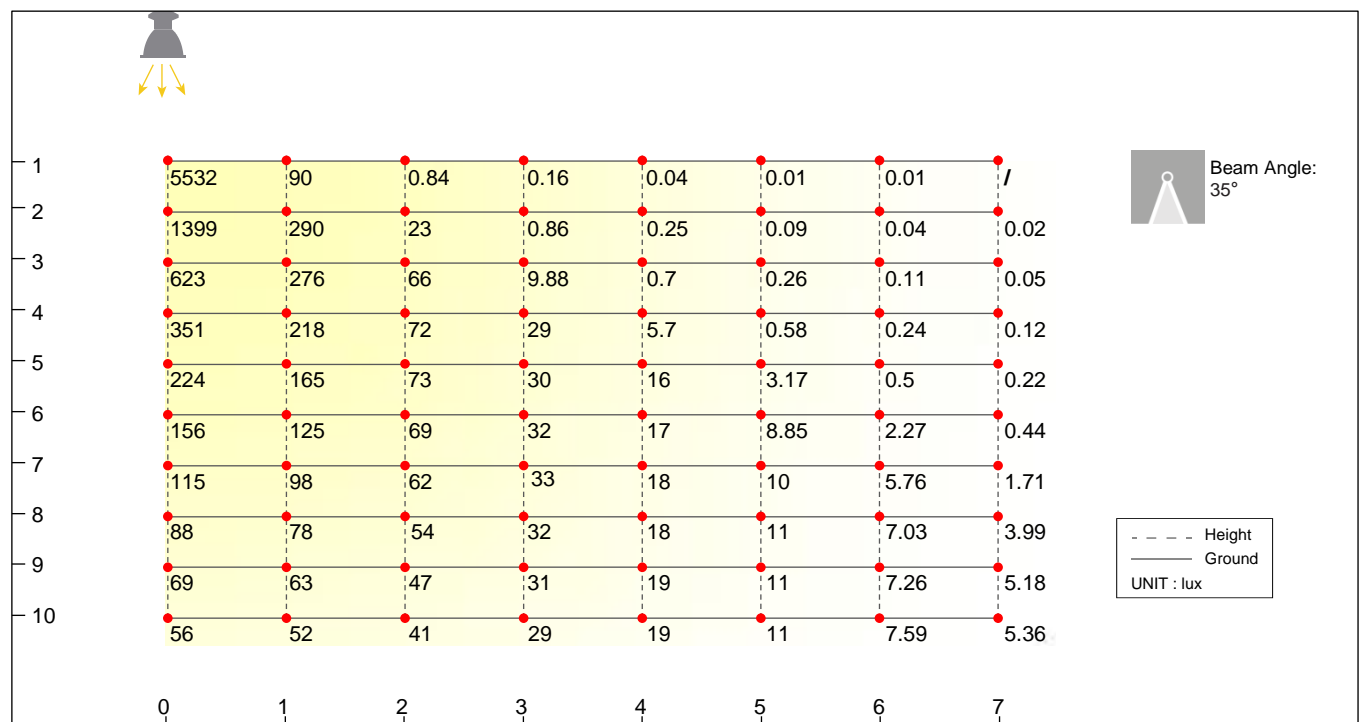


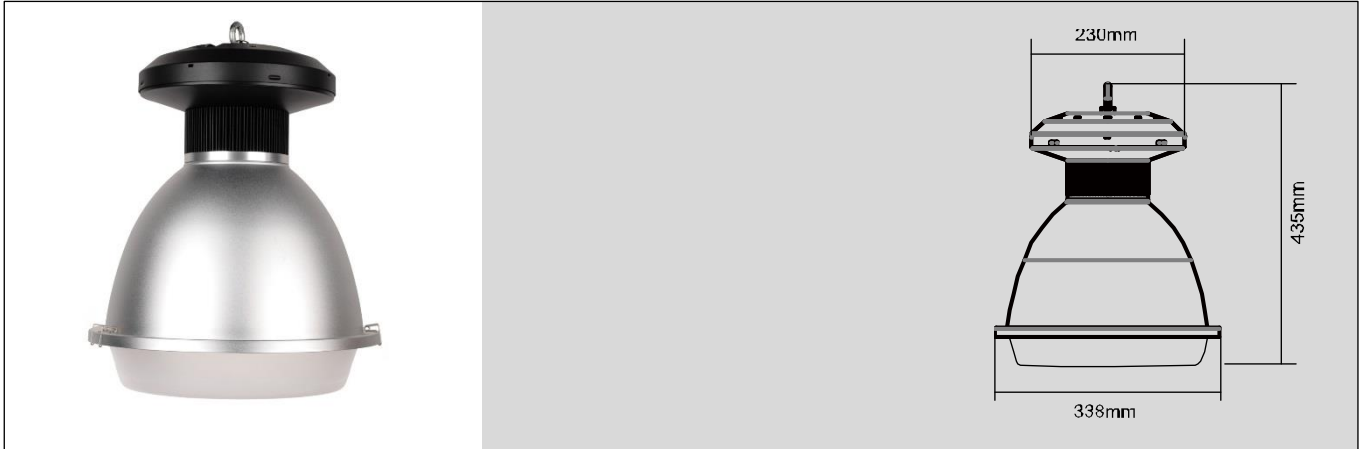
HB-AD-2035
CE CCC RoHS IP20

Power: 35W
 Luminous Flux: 2777lm
 Luminous Efficacy: 79lm/w
 Color Temperature: 5000K
 CRI: ≥ 80
 Beam Angle: 52°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V, 50/60Hz
 Power Factor: ≥ 0.9
 Weight: 3kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifetime: ≥ 60000 hrs

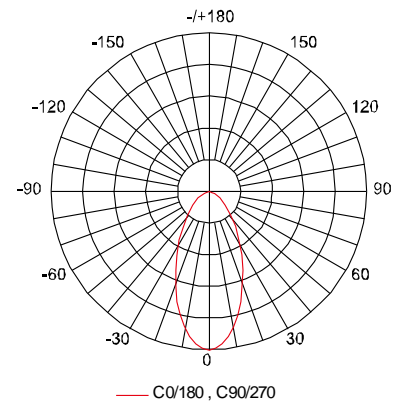
Illuminance Distribution


H(m)	E(lx)	D(cm)
1	2265	99
2	566	198
3	252	296
4	142	395
5	91	494

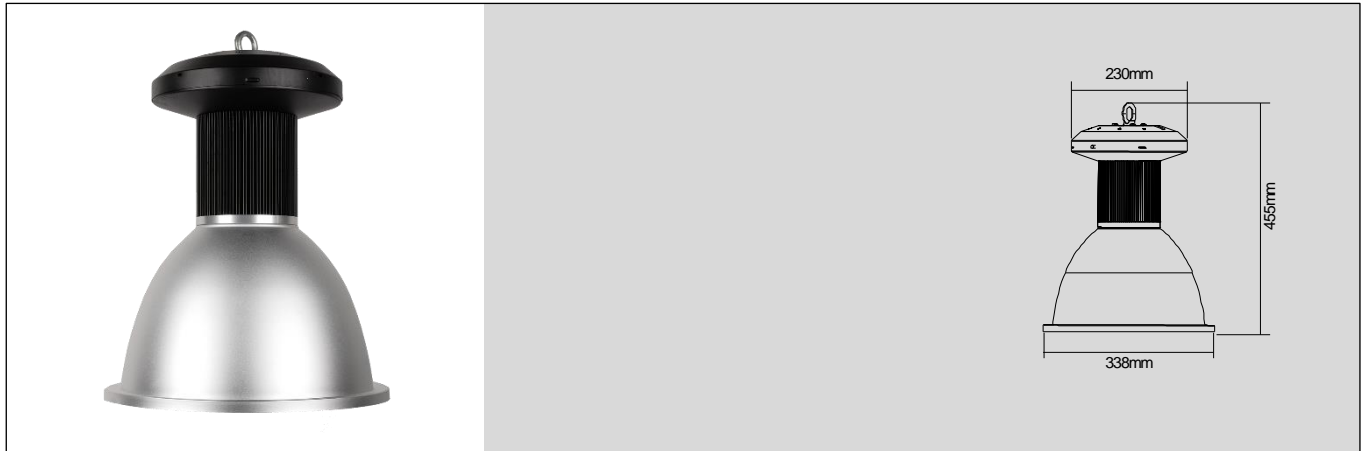


HB-A-2045


CE RoHS IP20

Power: 45W
 Luminous Flux: 3150lm
 Luminous Efficacy: 70lm/w
 Color Temperature: 5000K
 CRI: ≥ 80
 Beam Angle: 35°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V, 50/60Hz
 Power Factor: ≥ 0.9
 Weight: 3.5kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifetime: ≥ 60000 hrs

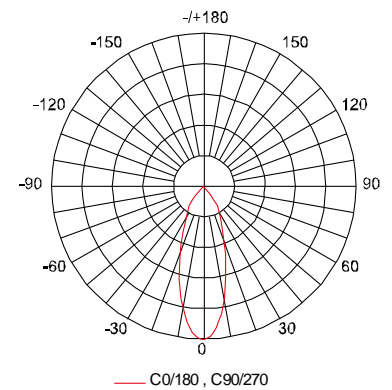

Illuminance Distribution

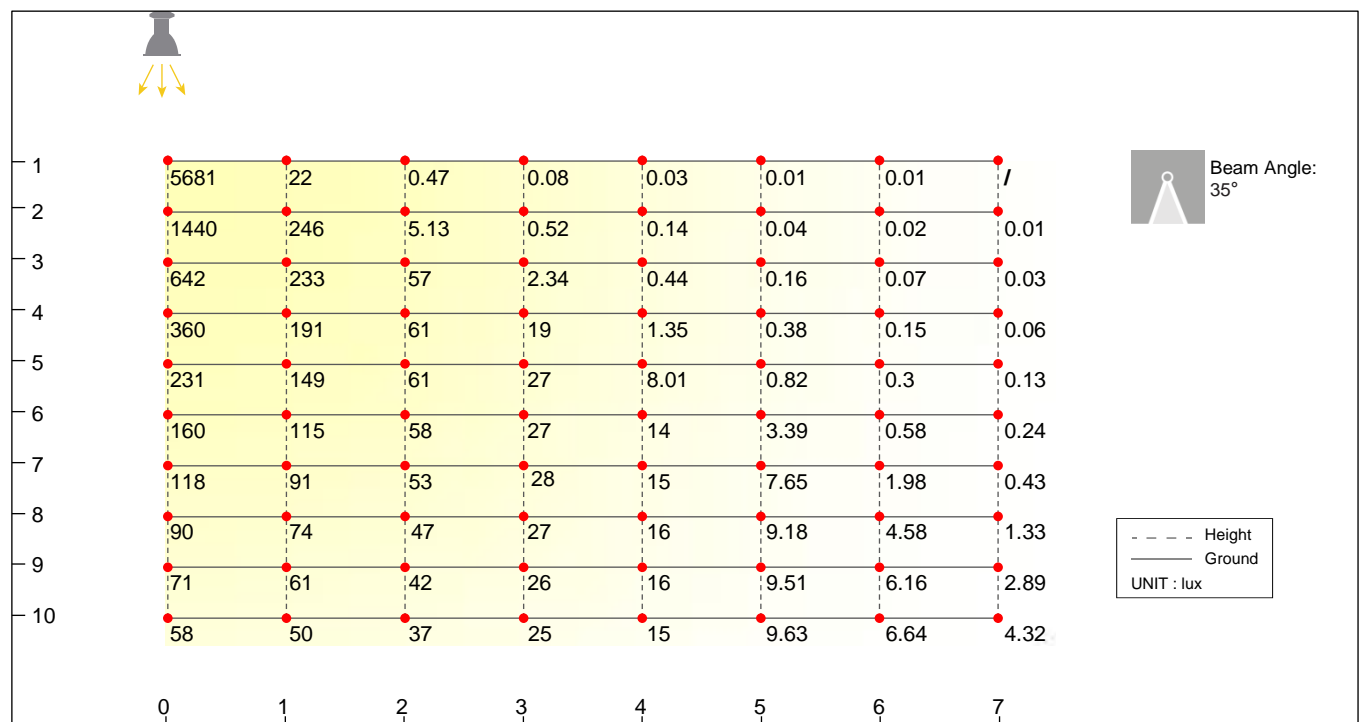





HB-A-2065


CE RoHS IP20

Power: 65W
 Luminous Flux: 5028lm
 Luminous Efficacy: 77lm/w
 Color Temperature: 5000K
 CRI: ≥ 80
 Beam Angle: 35°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V, 50/60Hz
 Power Factor: ≥ 0.9
 Weight: 3.5kg
 Operation Temperature: $-20^\circ\text{C} \sim +40^\circ\text{C}$
 Design Lifetime: $\geq 60000\text{hrs}$

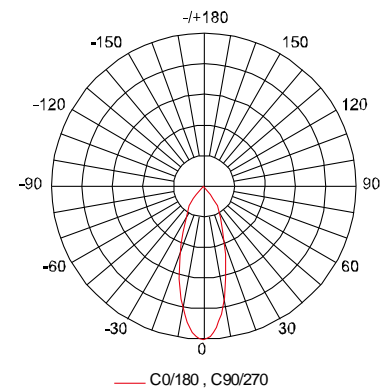

Illuminance Distribution

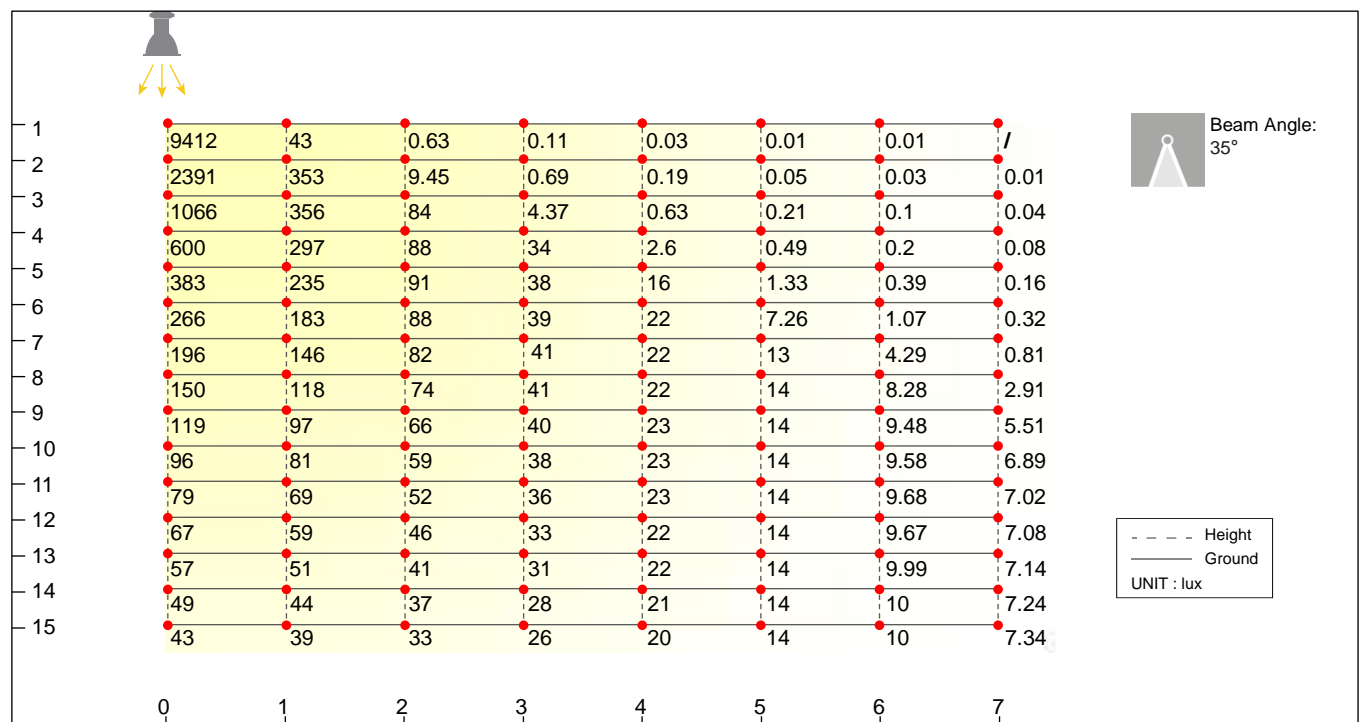





HB-AD-2065


CE CCC RoHS IP20

Power: 65W
 Luminous Flux: 4418lm
 Luminous Efficacy: 70lm/w
 Color Temperature: 5000K
 CRI: ≥80
 Beam Angle: 48°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V, 50/60Hz
 Power Factor: ≥0.9
 Weight: 3.8kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifetime: ≥60000hrs

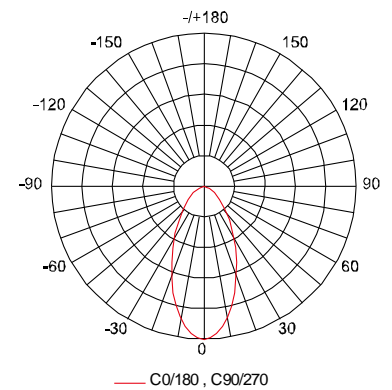

Illuminance Distribution

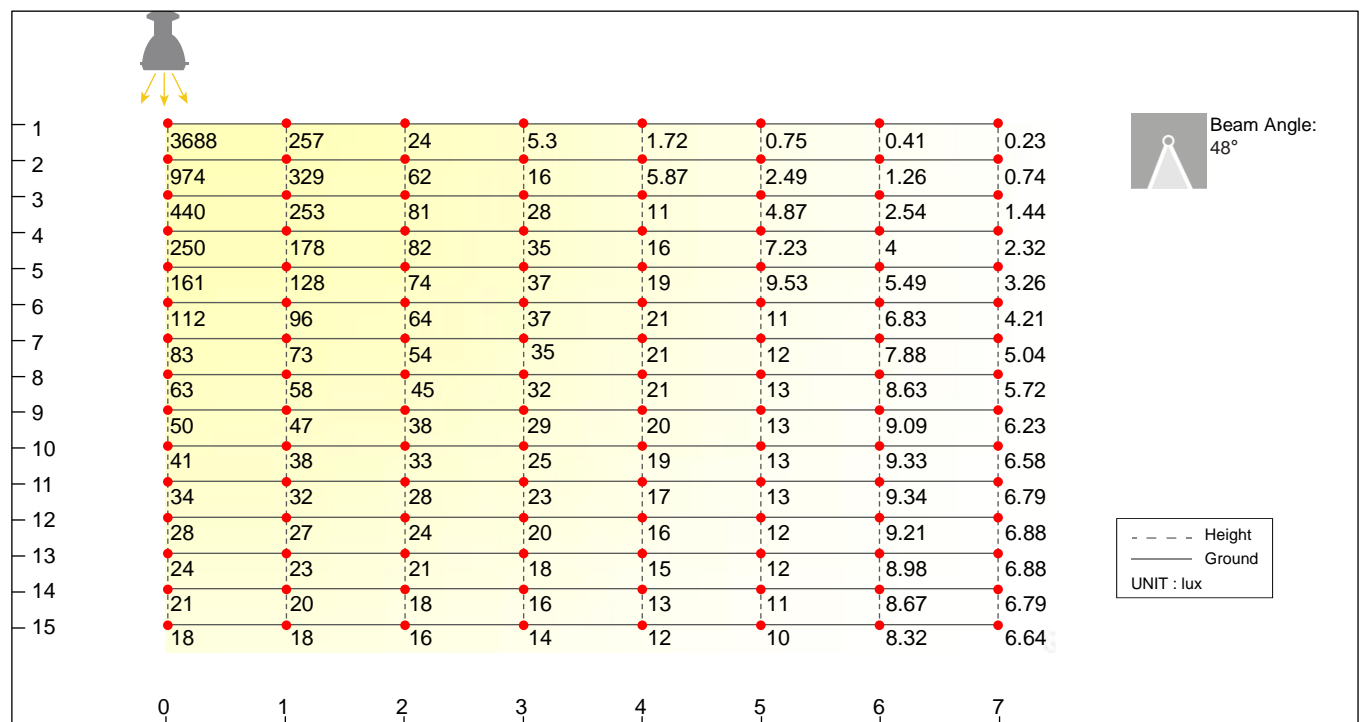

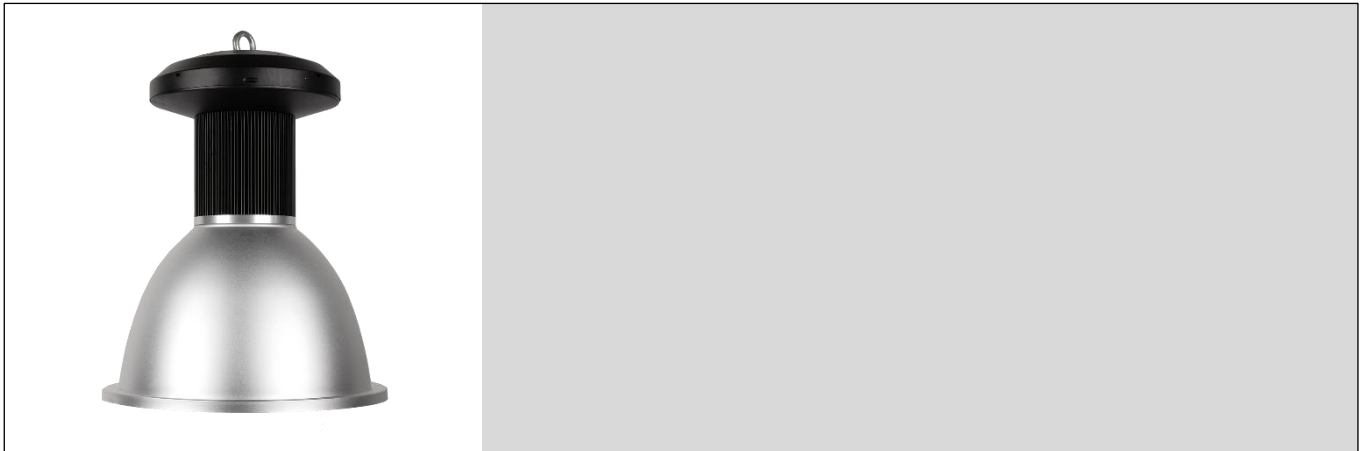

HB-A-2085

CE CCC RoHS IP20

Power: 85W
 Luminous Flux: 6134lm
 Luminous Efficacy: 74lm/w
 Color Temperature: 5000K
 CRI: ≥80
 Beam Angle: 68°
 Material: Aluminum
 Power Supply: Built-in
 Input Voltage: AC100-240V,50/60Hz
 Power Factor: ≥0.9
 Weight: kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifetime: ≥60000hrs

