



DASCOM LED LIGHTING SOLUTIONS

External LED T5 Tube



Applications: Be widely used in shopping mall, restaurant, meeting rooms,exhibiton hall, advertising lighting and other places of lighting.



T5-1006(0.6m)

CE RoHS IP20

Power*: 6W
 Luminous Flux : 582lm
 Luminous Efficacy : 97lm/w
 Total Power: 8W
 Circuit Efficacy* : 73lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC40-46V
 Input Current : 150mA
 Lamp Base : G5
 Cover: Matte Cover
 Weight : 75g
 Average Lifetime: ≥35000hrs

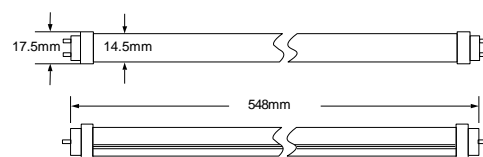
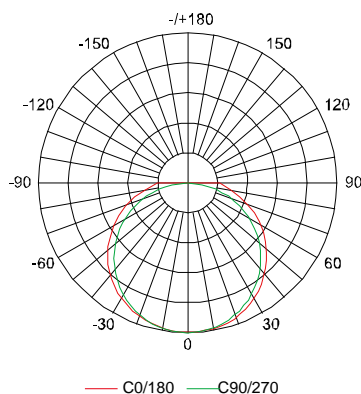




T5-1008(0.6m)

CE RoHS IP20

Power*: 8W
 Luminous Flux : 736lm
 Luminous Efficacy : 92lm/w
 Total Power: 10W
 Circuit Efficacy* : 74lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC34-40V
 Input Current : 220mA
 Lamp Base : G5
 Cover: Matte Cover
 Weight : 75g
 Average Lifetime: ≥35000hrs

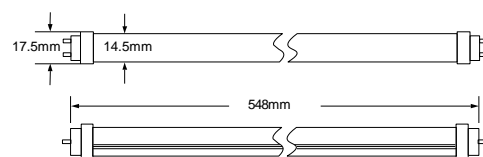
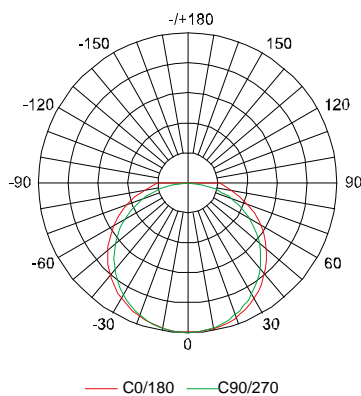




T5-1010(0.6m)

CE RoHS IP20

Power*: 10W
 Luminous Flux : 950lm
 Luminous Efficacy : 95lm/w
 Total Power: 12W
 Circuit Efficacy* : 79lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC43-49V
 Input Current : 220mA
 Lamp Base : G5
 Cover: Matte Cover
 Weight : 75g
 Average Lifetime: ≥35000hrs

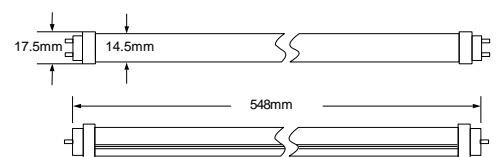
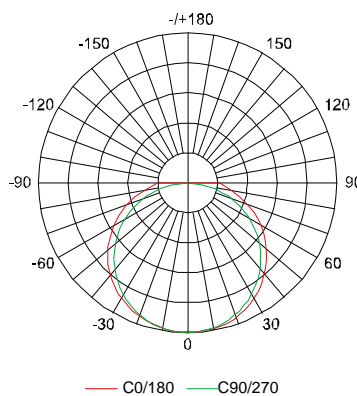




T5-1009(0.9m)

CE RoHS IP20

Power*: 9W
 Luminous Flux : 890lm
 Luminous Efficacy : 99lm/w
 Total Power: 11W
 Circuit Efficacy* : 88lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC43-49V
 Input Current : 250mA
 Lamp Base : G5
 Cover: Matte Cover
 Weight : 125g
 Average Lifetime: ≥35000hrs

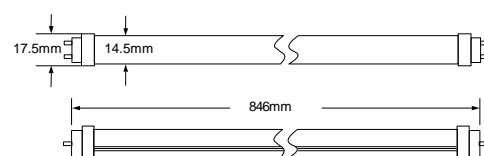
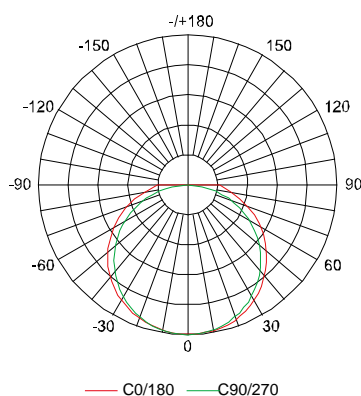




T5-1012(1.2m)

CE RoHS IP20

Power*: 12W
 Luminous Flux : 1212lm
 Luminous Efficacy : 101lm/w
 Total Power: 15W
 Circuit Efficacy* : 81lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC40-46V
 Input Current : 300mA
 Lamp Base : G5
 Cover: Matte Cover
 Weight : 150g
 Average Lifetime: ≥35000hrs

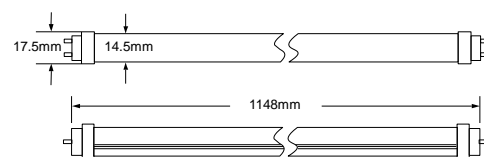
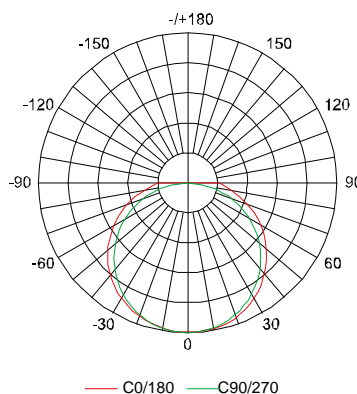




T5-1016(1.2m)

CE RoHS IP20

Power*: 16W
 Luminous Flux : 1632lm
 Luminous Efficacy : 102lm/w
 Total Power: 19W
 Circuit Efficacy* : 86lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC34-40V
 Input Current : 440mA
 Lamp Base : G5
 Cover: Matte Cover
 Weight : 150g
 Average Lifetime: ≥35000hrs

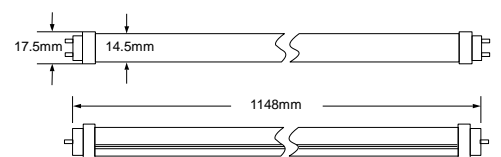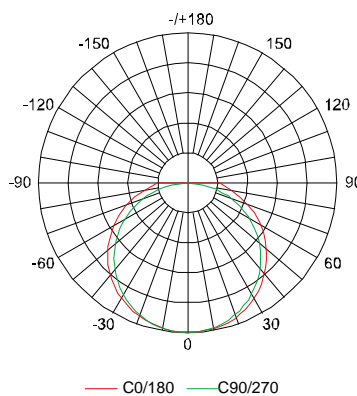



T5-1021(1.2m)

CE RoHS IP20

Power*: 21W
 Luminous Flux : 2058lm
 Luminous Efficacy : 98lm/w
 Total Power: 24W
 Circuit Efficacy* : 86lm/w
 Color Temperature : 6300K
 CRI : 63~80
 Beam Angle : 90°×110°
 Material: Aluminum+PC
 Power Supply: External
 Input Voltage : DC43-49V
 Input Current : 440mA
 Lamp Base : G13
 Cover: Matte Cover
 Weight : 150g
 Average Lifetime: ≥35000hrs

