

2026 PRODUCT CATALOGUE



Connectivity beyond limits...

One Partner. **Infinite Solutions.**


www.fluxindia.co.in

SR NO.	INDEX	PAGE NO.
	Copper Lugs	
1.	Copper Tubular Terminal Ends Light Duty	1-2
2.	Copper Tubular terminal Ends Long Barrel Heavy Duty	2
3.	High Conductivity Copper Tubular Terminal Ends with Inspection Window	3-4
4.	Copper Tubular Compression Type Cable Lugs (DIN 46235)	5-6
5.	Copper Tubular Cable Lugs (90) (DIN 46235)	6-7
6.	Copper Tubular Cable Lugs (45) (DIN 46235)	7-8
7.	Copper Cable Lugs Narrow palm for circuit breaker cable termination	8
8.	Copper Tubular Cable Lugs with Inspection Window (BS 4579)	9-10
9.	Copper Tubular Cable Lugs (45) (BS 4579)	11-12
10.	Copper Tubular Cable Lugs (90) (BS 4579)	12-13
	AWG Series Copper Tubular Lugs	
11	Long Barrel Cable Lugs Single Hole	13-14
12	Short Barrel Cable Lugs Single Hole	14-15-16
13	Long Barrel Cable Lugs Double Hole	16-17
14	Copper cable lugs with Flare Entry (Bell Shape)	18
15	Copper Ring Tongue Terminal ends	19-20
16	Copper Pin Type Terminal ends (Insulated)	21
17	Copper Ring Tongue Terminal ends (Insulated)	22
18	Copper Pin Type Terminal ends	23
19	Snap Female	23
20	Copper Fork terminal Ends	24
21	Copper Fork Terminal Ends (Insulated)	24
	Copper Connector	
22	Copper Tubular Inline Connector(Heavy Duty)	25
23	Copper Tubular Inline Connector with cable stoper(DIN 46267)	25

SR NO.	INDEX	PAGE NO.
	Copper Connector	
24	Copper insulated cable end sleeves to DIN 46228	26
	Aluminium Lugs	
25	Compression type Aluminium Lugs (EXR)	27
26	Compression Type Aluminium Long Palm double stud tubular terminal ends	27
27	Compression Type Aluminum Tubular terminal ends (PILC-8309-93)	28
28	Aluminium cable lugs As per DIN 46329	29
	AWG Series Aluminium Lugs	
29	EATL Series (Tin Plated Aluminium Lug)	30
30	EATL2 Series (Tin Plated Double Hole Aluminium Lug)	30
31	EACL Series (Tin Plated Aluminium Ferrule)	33
	Aluminium Connectors/Ferrules	
32	Aluminium Ferrule (XRM)	32
	Bimetallic Lugs & Connectors	
33	Bi-metallic cable lugs	33
34	Bi-metallic cable connectors	34
35	Bi-metallic lugs with copper & Forged palm	35
36	Reverse Bi-metallic Lug with aluminium cables	35
37	Bi-metallic copper pin connectors for aluminium cables	36
38	Bi-metallic aluminium pin connectors for copper cables	36
	Mechanical / Screw Connector & Lugs	
39	Intro Introduction ECC Mechanical Connectors	38-39
40	ECC Mechanical Lugs	39
41	ECC Repair Connectors	39
42	ECC Reducer Type Bolted Connectors	40
43	ECC Mechanical Lugs Center Palm	41
44	Low Tension Mechanical Connectors	41

COPPER TUBULAR TERMINAL ENDS

LIGHT DUTY

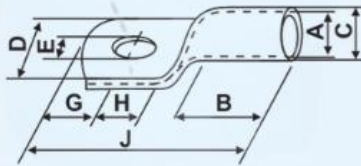


Material : ETP Copper
Finish : Tin Plated

CABLE SIZE mm ²	STUD HOLE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
2.5	5.2	2.4	4.0	8	8	5	5	21	ECT - 2.5 / 5	20000000
4	6.5	3.1	4.8	11	7	6	6	22	ECT - 4 / 6	20000001
6	6.5	3.8	5.5	11	9	6	6	24	ECT - 6 / 6	20000002
10	6.5	4.5	6.2	11	9	6	6	24	ECT - 10 / 6	20000003
16	6.5	5.4	7.1	12	12	8	6	30	ECT - 16 / 6	20000004
25	6.5	6.8	8.8	13	12	12	8	37	ECT - 25 / 6	20000005
35*	6.5	8.2	10	15	13.5	12	8	37	ECT - 35 / 6	20000006
	8.4	8.2	10	15	13.5	12	8	37	ECT - 35 / 8	20000007
	10.5	8.2	10	15	13.5	12	8	37	ECT - 35 / 10	20000008
	13	8.2	10	18	13.5	12	10	41	ECT - 35 / 12	20000009
50*	6.5	9.5	11.2	16	16	12	9	45	ECT - 50 / 6	20000010
	8.4	9.5	11.2	16	17	12	9	45	ECT - 50 / 8	20000011
	10.5	9.5	11.2	16	17	12	9	45	ECT - 50 / 10	20000012
	13	9.5	11.2	20	17	12	10	45	ECT - 50 / 12	20000013
70	8.4	11.5	13.8	20	18	15	13	56	ECT - 70 / 8	20000014
	10.5	11.5	13.8	20	18	15	13	56	ECT - 70 / 10	20000015
	13	11.5	13.8	20	18	15	13	56	ECT - 70 / 12	20000016
	14.5	11.5	13.8	20	18	15	14	56	ECT - 70 / 14	20000017
95	8.4	13.0	15.6	23	21	15	13	58	ECT - 95 / 8	20000018
	10.5	13.0	15.6	23	21	15	13	58	ECT - 95 / 10	20000019
	13	13.0	15.6	23	21	15	13	58	ECT - 95 / 12	20000020
	14.5	13.0	15.6	23	22	15	14	58	ECT - 95 / 14	20000021
	17	13.0	15.6	23	22	16	14	58	ECT - 95 / 16	20000022
120	8.4	15.0	17.8	26	22	14	13	60	ECT - 120 / 8	20000023
	10.5	15.0	17.8	26	22	14	13	60	ECT - 120 / 10	20000024
	13	15.0	17.8	26	22	14	13	60	ECT - 120 / 12	20000025
	14.5	15.0	17.8	26	22	14	13	60	ECT - 120 / 14	20000026
	17	15.0	17.8	26	22	16	16	64	ECT - 120 / 16	20000027
150	8.4	16.0	19.6	28	26	18	15	70	ECT - 150 / 8	20000028
	10.5	16.0	19.6	28	26	18	15	70	ECT - 150 / 10	20000029
	13	16.0	19.6	28	26	18	15	70	ECT - 150 / 12	20000030
	14.5	16.0	19.6	28	26	16	16	70	ECT - 150 / 14	20000031
	17	16.0	19.6	28	26	16	16	70	ECT - 150 / 16	20000032
	21	16.0	19.6	28	26	16	16	73	ECT - 150 / 20	20000033
185	10.5	18.5	22	32	28	21	21	83	ECT - 185 / 10	20000034
	13	18.5	22	32	28	21	21	83	ECT - 185 / 12	20000035
	14.5	18.5	22	32	28	21	21	83	ECT - 185 / 14	20000036

COPPER TUBULAR TERMINAL ENDS LIGHT DUTY


CABLE SIZE mm ²	STUD HOLE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
240	10.5	22	26	38	34	24	24	97	ECT - 240 / 10	20000037
	13	22	26	38	34	24	24	97	ECT - 240 / 12	20000038
	14.5	22	26	38	34	24	24	97	ECT - 240 / 14	20000039
	17	22	26	38	34	24	24	97	ECT - 240 / 16	20000040
	21	22	26	38	34	24	24	97	ECT - 240 / 20	20000041
300	10.5	24.5	28.7	42	42	25	26	103	ECT - 300 / 10	20000042
	13	24.5	28.7	42	42	25	26	103	ECT - 300 / 12	20000043
	14.5	24.5	28.7	42	42	25	26	103	ECT - 300 / 14	20000044
	17	24.5	28.7	42	42	25	26	103	ECT - 300 / 16	20000045
	21	24.5	28.7	42	42	25	26	103	ECT - 300 / 20	20000046
	BL	24.5	28.7	42	51		51	103	ECT - 300 / BL	20000047
400	13	28	33.2	49	44	25	25	112	ECT - 400 / 12	20000048
	14.5	28	33.2	49	44	25	25	112	ECT - 400 / 14	20000049
	17	28	33.2	49	44	25	25	112	ECT - 400 / 16	20000050
	21	28	33.2	49	44	25	25	112	ECT - 400 / 20	20000051
	BL	28	33.2	49	50		50	112	ECT - 400 / BL	20000052
500	14.5	30	36	53	50	27	27	121	ECT - 500 / 14	20000053
	17	30	36	53	50	27	27	121	ECT - 500 / 16	20000054
	21	30	36	53	50	27	27	121	ECT - 500 / 20	20000055
	BL	30	36	53	54		54	121	ECT - 500 / BL	20000056
630	14.5	35	41.5	61	70	25	25	144	ECT - 630 / 14	20000057
	17	35	41.5	61	70	25	25	144	ECT - 630 / 16	20000058
	21	35	41.5	61	70	25	25	144	ECT - 630 / 20	20000059
	BL	35	41.5	61	70		50	144	ECT - 630 / BL	20000060

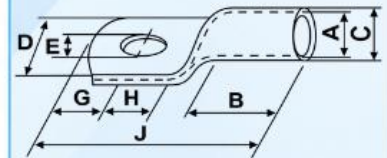

Material : ETP Copper
Finish : Tin Plated

COPPER TUBULAR TERMINAL ENDS LONG BARREL HEAVY DUTY


CABLE SIZE mm ²	STUD HOLE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
6	6.5	3.8	5.5	11	15	8	6	34	ECTLB - 6/6	20100000
10	8.4	4.5	6.2	12	18	7	6	37	ECTLB - 10/8	20100001
16	8.4	5.4	7.1	12	28	7	7	47	ECTLB - 16/8	20100002
25	8.4	6.8	8.8	13	31.2	7	7	50	ECTLB - 25/8	20100003
35	8.4	8.2	10.6	16	28	9	9	53	ECTLB - 35/8	20100004
50	13	9.5	12.4	18	33	10	9	66	ECTLB - 50/12	20100005
70	13	11.3	14.6	21	37.6	11	11	68.6	ECTLB - 70/12	20100006
95	13	13.5	17.4	25	40	13	12	73	ECTLB - 95/12	20100007
120	13	14.2	17.8	25.5	41.9	14	13	77	ECTLB - 120/12	20100008
150	13	16.5	21.2	30	53	17	16	100	ECTLB - 150/12	20100009
185	13	18.5	23.5	34	54	19	17	104	ECTLB - 185/12	20100010
240	17	21	26.5	38	64.7	17	16	115	ECTLB - 240/16	20100011
300	21	23.5	30	43	74	22	22	137	ECTLB - 300/20	20100012
400	21	28.5	36.5	52.5	84	25	25	154	ECTLB - 400/20	20100013
500	21	30	39	56	85	26	25	161	ECTLB - 500/20	20100014
630	21	35	45	63.8	78	33	33	156	ECTLB - 630/20	20100015
800	21	39	50.6	72	95	37.5	37.5	187	ECTLB - 800/20	20100016

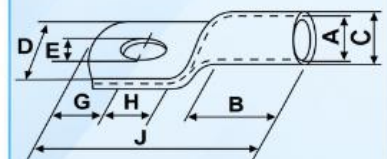

Material : ETP Copper
Finish : Tin Plated

HIGH CONDUCTIVITY COPPER TUBULAR TERMINAL ENDS WITH INSPECTION WINDOW

for solderless crimping to copper or XLPE cables



Material-ETP Copper
Finish- Tin Plated


CABLE SIZE mm ²	STUD HOLE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
1.5	4.2	1.8	3.7	8	6	5	4	17	EHCT - 1.5 / 4	20200000
	5.2	1.8	3.7	8	6	5	4	17	EHCT - 1.5 / 5	20200001
	6.5	1.8	3.7	10	6	6	4	18	EHCT - 1.5 / 6	20200002
2.5	4.2	2.4	4.0	8	8	5	4	19	EHCT - 2.5 / 4	20200003
	5.2	2.4	4.0	8	8	5	4	19	EHCT - 2.5 / 5	20200004
	6.5	2.4	4.0	10	8	6	5	21	EHCT - 2.5 / 6	20200005
	8.4	2.4	4.0	12	8	9	6	26	EHCT - 2.5 / 8	20200006
4	4.2	3.1	4.8	10	8	6	5	21	EHCT - 4 / 4	20200007
	5.2	3.1	4.8	10	8	6	5	21	EHCT - 4 / 5	20200008
	6.5	3.1	4.8	10	8	6	5	21	EHCT - 4 / 6	20200009
	8.4	3.1	4.8	12	8	9	6	24	EHCT - 4 / 8	20200010
6	5.2	3.8	5.5	10	10	6	6	23	EHCT - 6 / 5	20200011
	6.5	3.8	5.5	10	10	6	5	24	EHCT - 6 / 6	20200012
	8.4	3.8	5.5	12	10	9	6	27	EHCT - 6 / 8	20200013
10	6.5	4.5	6.2	11	10	7	6	26	EHCT - 10 / 6	20200014
	8.4	4.5	6.2	12	10	9	6	27.5	EHCT - 10 / 8	20200015
	10.5	4.5	6.8	15	11	11	8	32	EHCT - 10 / 10	20200016
16	6.5	5.4	7.1	12	12	7	7	30	EHCT - 16 / 6	20200017
	8.4	5.4	7.1	12	12	7	7	30	EHCT - 16 / 8	20200018
	10.5	5.4	7.6	15	12	12	8	35	EHCT - 16 / 10	20200019
	12.5	5.4	7.6	15	12	13	11	39	EHCT - 16 / 12	20200020
25	6.5	6.8	8.8	13	12	7	7	30	EHCT - 25 / 6	20200021
	8.4	6.8	8.8	13	12	7	7	30	EHCT - 25 / 8	20200022
	10.5	6.8	8.8	15	13	11	10	36.5	EHCT - 25 / 10	20200023
35	6.5	8.2	10.6	16	14	9	9	36	EHCT - 35 / 6	20200024
	8.4	8.2	10.6	16	14	9	9	36	EHCT - 35 / 8	20200025
	10.5	8.2	10.6	16	14	9	9	37	EHCT - 35 / 10	20200026
	13	8.2	10.6	18	13.5	12	10	41	EHCT - 35 / 12	20200027
50	8.4	9.5	12.4	18	16	10	10	42	EHCT - 50 / 8	20200028
	10.5	9.5	12.4	18	16	10	10	42	EHCT - 50 / 10	20200029
	13	9.5	12.4	20	17	12	10	45	EHCT - 50 / 12	20200030
70	8.4	11.3	14.6	21	18.5	11	11	47	EHCT - 70 / 8	20200031
	10.5	11.3	14.6	21	18.5	11	11	47	EHCT - 70 / 10	20200032
	13.0	11.3	14.6	21	18.5	11	11	47	EHCT - 70 / 12	20200033
	14.5	11.3	14.6	22	18.5	15	14	55	EHCT - 70 / 14	20200034
95	8.4	13.5	17.4	25	21	13	12	53	EHCT - 95 / 8	20200035
	10.5	13.5	17.4	25	21	13	12	53	EHCT - 95 / 10	20200036
	13.0	13.5	17.4	25	21	13	12	53	EHCT - 95 / 12	20200037
	14.5	13.5	17.4	25	22	15	14	55	EHCT - 95 / 14	20200038
	17	13.5	17.4	25	22	16	14	58	EHCT - 95 / 16	20200039

EHCT Continued....

HIGH CONDUCTIVITY COPPER TUBULAR TERMINAL ENDS WITH INSPECTION WINDOW


for solderless crimping to copper or XLPE cables

CABLE SIZE mm ²	STUD HOLE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
120	10.5	15	19.4	28	23	14	13	60	EHCT-120 / 10	20200040
	13.0	15	19.4	28	23	14	13	60	EHCT-120 / 12	20200041
	14.5	15	19.4	28	23	14	13	60	EHCT-120 / 14	20200042
	17.0	15	19.4	28	23	16	16	64	EHCT-120 / 16	20200043
150	10.5	16.5	21.2	30	27	15	16	70	EHCT-150 / 10	20200044
	13.0	16.5	21.2	30	27	15	16	70	EHCT-150 / 12	20200045
	14.5	16.5	21.2	30	27	15	16	70	EHCT-150 / 14	20200046
	17.0	16.5	21.2	30	27	16	16	70	EHCT-150 / 16	20200047
	21	16.5	21.2	30	27	16	19	73	EHCT-150 / 20	20200048
185	10.5	18.5	23.5	34	32	19	17	80	EHCT-185 / 10	20200049
	13.0	18.5	23.5	34	32	19	17	80	EHCT-185 / 12	20200050
	14.5	18.5	23.5	34	32	19	17	80	EHCT-185 / 14	20200051
	17.0	18.5	23.5	34	32	19	17	80	EHCT-185 / 16	20200052
	21.0	18.5	23.5	34	32	19	17	80	EHCT-185 / 20	20200053
240	10.5	21.0	26.5	38	37	20	20	94	EHCT-240 / 10	20200054
	13	21.0	26.5	38	37	20	20	94	EHCT-240 / 12	20200055
	14.5	21.0	26.5	38	37	20	20	94	EHCT-240 / 14	20200056
	17.0	21.0	26.5	38	37	20	20	94	EHCT-240 / 16	20200057
	21.0	21.0	26.5	38	37	20	20	94	EHCT-240 / 20	20200058
	BL	21.0	26.5	38	37	40		94	EHCT-240 / BL	20200059
300	10.5	23.5	30.0	43	42	22	22	101	EHCT-300 / 10	20200060
	13	23.5	30.0	43	42	22	22	101	EHCT-300 / 12	20200061
	14.5	23.5	30.0	43	42	22	22	101	EHCT-300 / 14	20200062
	17.0	23.5	30.0	43	42	22	22	101	EHCT-300 / 16	20200063
	21.0	23.5	30.0	43	42	22	22	101	EHCT-300 / 20	20200064
400	10.5	28.5	36.5	52.5	44	26	28	114	EHCT-400 / 10	20200065
	13	28.5	36.5	52.5	44	26	28	114	EHCT-400 / 12	20200066
	14.5	28.5	36.5	52.5	44	26	28	114	EHCT-400 / 14	20200067
	17.0	28.5	36.5	52.5	44	26	28	114	EHCT-400 / 16	20200068
	21.0	28.5	36.5	52.5	44	26	28	114	EHCT-400 / 20	20200069
500	17.0	30.0	39.0	56	48	28	23	129	EHCT-500 / 16	20200072
	21.0	30.0	39.0	56	48	28	23	129	EHCT-500 / 20	20200073
	BL	30.0	39.0	56	48	56		129	EHCT-600 / BL	20200074
630	17.0	35.0	45.0	63.8	58	33	33	148	EHCT-630 / 16	20200075
	21.0	35.0	45.0	63.8	58	33	33	148	EHCT-630 / 20	20200076
	BL	35.0	45.0	63.8	58	66		148	EHCT-630 / BL	20200077
800	BL	39.0	50.6	72	78	65.5		170	EHCT-800 / BL	20200078
1000	BL	43.0	56.2	79	90	85		200	EHCT-1000 / BL	20200079



Material-ETP Copper
Finish- Tin Plated

COPPER TUBULAR COMPRESSION TYPE CABLE LUGS (DIN 46235)



Material : ETP Copper; Surface : Tin Plated

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm									PRODUCT CODE	ECC ITEM CODE
		A	B	D	D	E	C	G	H	J		
6	M 5	3.8	10	8.5	5.3	5.5	9	6	3	33	EDT-6/5	20300000
	M 6	3.8	10	8.5	6.4	5.5	10.5	8	8	34.5	EDT-6/6	20300001
10	M 5	4.5	10	9	5.3	6.2	9	6	6	36	EDT-10/5	20300002
	M 6	4.5	10	9	6.4	6.2	10.5	8	8	37.5	EDT-10/6	20300003
	M 8	5.5	20	13	8.4	8.5	13.0	10	12	49	EDT-16/8	20300004
16	M 10	5.5	20	17	10.5	8.5	15	12	12	51	EDT-16/10	20300005
25	M 6	7	20	14	6.4	10	10.5	8	8	48.5	EDT-25/6	20300008
	M 8	7	20	16	8.4	10	13	10	10	51	EDT-25/8	20300009
	M 10	7	20	17	10.5	10	15	12	12	53	EDT-25/10	20300010
35	M 6 **	8.2	20	17	6.4	12.5	7.5	8	8	49.5	EDT-35/6	20300011
	M 8	8.2	20	17	8.4	12.5	13	10	10	55	EDT-35/8	20300012
	M 10	8.2	20	19	10.5	12.5	15	12	12	57	EDT-35/10	20300013
	M 12	8.2	20	21	13	12.5	16	13	13	58	EDT-35/12	20300014
50	M 8	10	28	20	8.4	14.5	13	10	10	65	EDT-50/8	20300015
	M 10	10	28	22	10.5	14.5	15	12	12	67	EDT-50/10	20300016
	M 12	10	28	24	13	14.5	16	13	13	68	EDT-50/12	20300017
70	M 8	11.5	28	24	8.4	16.5	13	10	10	68	EDT-70/8	20300018
	M 10	11.5	28	24	10.5	16.5	15	12	12	70	EDT-70/10	20300019
	M 12	11.5	28	24	13	16.5	16	13	13	71	EDT-70/12	20300020
95	M 8 **	13.5	35	28	8.4	19	15	12	12	80	EDT-95/8	20300021
	M 10	13.5	35	28	10.5	19	15	12	12	80	EDT-95/10	20300022
	M 12	13.5	35	28	13	19	16	13	17	81	EDT-95/12	20300023
	M 14 **	13.5	35	28	14.5	19	16	14.5	18	81	EDT-95/14	20300024
120	M 10	15.5	35	30	10.5	21	15	12	12	85	EDT-120/10	20300025
	M 12	15.5	35	30	13	21	16	13	17	86	EDT-120/12	20300026
	M 14 **	15.5	35	30	14.5	21	18	19	17	88	EDT-120/14	20300027
	M 16	15.5	35	30	17	21	19	16	17	89	EDT-120/16	20300028
150	M 10	17	35	34	10.5	23.5	15	12	12	93	EDT-150/10	20300029
	M 12	17	35	34	13	23.5	16	13	17	94	EDT-150/12	20300030
	M 14 **	17	35	34	14.5	23.5	16	14	14	94	EDT-150/14	20300031
	M 16	17	35	34	17	23.5	19	16	17	97	EDT-150/16	20300032
185	M 10	19	40	36	10.5	25.5	15	12	12	97	EDT-185/10	20300033
	M 12	19	40	36	13	25.5	16	13	13	98	EDT-185/12	20300034
	M 14 **	19	40	36	14.5	25.5	19	16	18	101	EDT-185/14	20300035
	M 16	19	40	36	17	25.5	19	16	17	101	EDT-185/16	20300036
	M 20	19	40	36	21	25.5	22	20	18	104	EDT-185/20	20300037


NOTE : ** Not standard

EDT Continued....

COPPER TUBULAR COMPRESSION TYPE CABLE LUGS (DIN 46235)

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm								PRODUCT CODE	ECC ITEM CODE
		A	B	D	E	C	G	H	J		
240	M 12	21.5	40	42	13	29	16	13	108	EDT - 240 / 12	20300038
	M 14**	21.5	40	42	14.5	29	19	16	111	EDT - 240 / 14	20300039
	M 16	21.5	40	42	17	29	19	16	111	EDT - 240 / 16	20300040
300	M 16**	24.5	50	48	14.5	32	19	16	119	EDT - 300 / 14	20300041
	M 16	24.5	50	48	17	32	19	16	119	EDT - 300 / 16	20300042
	M 20	24.5	50	48	21	32	22	20	122	EDT - 300 / 20	20300043
400	M 14**	27.5	70	55	14.5	38.5	25	16	140	EDT - 400 / 14	20300044
	M 16	27.5	70	55	17	38.5	25	16	140	EDT - 400 / 16	20300045
	M 20	27.5	70	55	21	38.5	25	20	140	EDT - 400 / 20	20300046
500	M 30**	31	70	60	17	42	25	20	150	EDT - 500 / 16	20300047
	M 20	31	70	60	21	42	25	20	150	EDT - 500 / 20	20300048
630	M 30**	34.5	80	64	17	44	25	20	160	EDT - 630 / 16	20300049
	M 20	34.5	80	64	21	44	25	20	160	EDT - 630 / 20	20300050
800	M 30**	40	100	75	17	52	25	20	190	EDT - 800 / 16	20300051
	M 20	40	100	75	21	52	25	20	190	EDT - 800 / 20	20300052
1000	M 30**	44	100	83	17	58	25	20	190	EDT - 1000 / 16	20300053
	M 20	44	100	83	21	58	25	20	190	EDT - 1000 / 20	20300054


NOTE : ** Not standardised

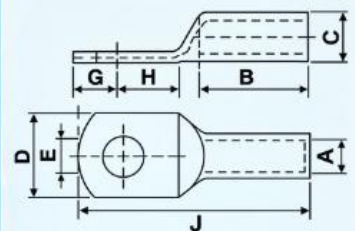

Material : ETP Copper; Surface : Tin Plated

COPPER TUBULAR 90°ANGLE CABLE LUGS (DIN 46235)


CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm								PRODUCT CODE	ECC ITEM CODE
		A	B	D	E	C	G	H	J		
6	M 5	3.8	10	8.5	3.8	5.4	5.5	9	6	EDTA - 90-6/5	20400000
	M 6	3.8	10	8.5	8.5	6.4	5.5	10.5	8	EDTA - 90-6/6	20400001
10	M 5	4.5	10	9	9	5.4	6.20	9	6	EDTA - 90-10/5	20400002
	M 6	4.5	10	9	9	6.4	6.20	10.5	8	EDTA - 90-10/6	20400003
16	M 6	5.5	20	20	13	6.4	8.5	10.5	8	EDTA - 90-16/6	20400004
	M 8	5.5	20	20	13	8.4	8.5	13	10	EDTA - 90-16/8	20400005
25	M 6	7	20	14	14	6.4	10	10.5	8	EDTA - 90-25/6	20400006
	M 8	7	20	17	14	8.4	10	13	10	EDTA - 90-25/8	20400007
	M 10	7	20	17	17	10.5	10	15	12	EDTA - 90-25/10	20400008
35	M 8	8.2	20	17	17	8.4	12.5	13	10	EDTA - 90-35/8	20400011
	M 10	8.2	20	19	19	10.5	12.5	15	12	EDTA - 90-35/10	20400012
	M 12	8.2	20	21	21	13	12.5	16	13	EDTA - 90-35/12	20400013
50	M 8	10	28	20	20	8.4	14.5	13	10	EDTA - 90-50/8	20400014
	M 10	10	28	22	20	10.5	14.5	15	12	EDTA - 90-50/10	20400015
	M 12	10	28	24	20	13	14.5	16	13	EDTA - 90-50/12	20400016
70	M 8	11.5	28	24	23	8.4	16.5	13	10	EDTA - 90-70/8	20400017
	M 10	11.5	28	24	20	10.5	16.5	15	12	EDTA - 90-70/10	20400018
	M 12	11.5	28	24	33	13	16.5	16	13	EDTA - 90-70/12	20400019



Tube Dimensions in accordance with DIN 46235
Material : ETP Copper;
Surface : Tin Plated


EDTA Continued....

COPPER TUBULAR 90°ANGLE CABLE LUGS (DIN 46235)

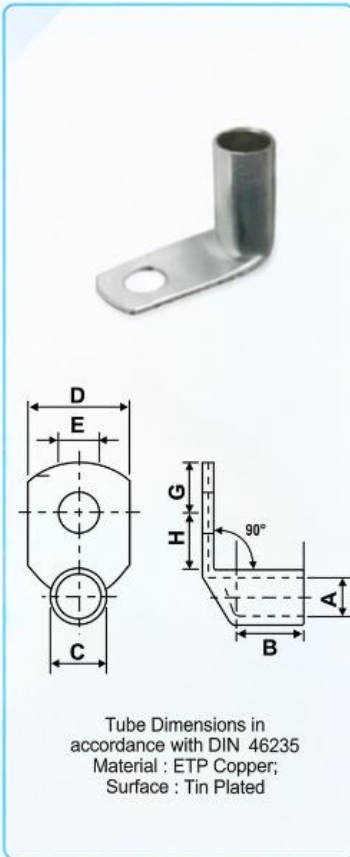

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	B	D	E	C	G	H		
95	M 10	13.5	35	28	10.5	19	15	12	EDTA - 90-95/10	20400020
	M 12	13.5	35	28	13	19	16	13	EDTA - 90-95/12	20400021
	M 14	13.5	35	28	15	19	16	16	EDTA - 90-95/14	20400022
120	M 10	15.5	35	30	10.5	21	15	12	EDTA - 90-120/10	20400023
	M 12	15.5	35	30	13	21	16	13	EDTA - 90-120/12	20400024
	M 14	15.5	35	30	15	21	18	13	EDTA - 90-120/14	20400025
	M 16	15.5	35	30	17	21	19	16	EDTA - 90-120/16	20400026
150	M 10	17	35	34	10.5	23.5	15	12	EDTA - 90-150/10	20400027
	M 12	17	35	34	13	23.5	16	13	EDTA - 90-150/12	20400028
	M 14	17	35	34	15	23.5	19	16	EDTA - 90-150/14	20400029
	M 16	17	35	34	17	23.5	19	16	EDTA - 90-150/16	20400030
185	M 10	19	40	36	10.5	25.5	15	12	EDTA - 90-185/10	20400031
	M 12	19	40	36	13	25.5	16	13	EDTA - 90-185/12	20400032
	M 14	19	40	36	15	25.5	19	16	EDTA - 90-185/14	20400033
	M 16	19	40	36	17	25.5	19	16	EDTA - 90-185/16	20400034
	M 20	19	40	36	21	25.5	22	20	EDTA - 90-185/20	20400035
240	M 12	21.5	40	42	13	29	16	13	EDTA - 90-240/12	20400036
	M 14	21.5	40	42	15	29	19	16	EDTA - 90-240/14	20400037
	M 16	21.5	40	42	17	29	19	16	EDTA - 90-240/16	20400038
	M 20	21.5	40	42	21	29	22	20	EDTA - 90-240/20	20400039


COPPER TUBULAR 45°ANGLE CABLE LUGS (DIN 46235)

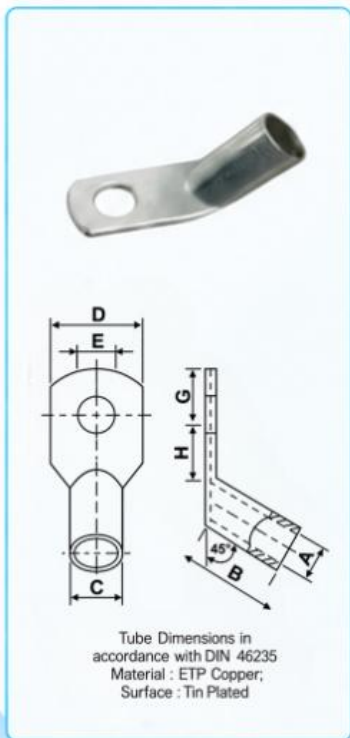

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	B	D	E	C	G	H		
6	M 5	3.8	10	8.5	5.4	5.5	9	6	EDTA - 45-6/5	20500000
	M 6	3.8	10	8.5	6.5	5.5	10.5	8	EDTA - 45-6/6	20500001
10	M 5	4.5	10	9	5.4	6.20	9	6	EDTA - 45-10/5	20500002
	M 6	4.5	10	9	6.5	6.20	10.5	8	EDTA - 45-10/6	20500003
16	M 6	5.5	20	13	6.4	8.5	10.5	8	EDTA - 45-16/6	20500004
	M 8	5.5	20	13	8.4	8.5	13	10	EDTA - 45-16/8	20500005
25	M 6	7	20	14	6.4	10	10.5	8	EDTA - 45-25/6	20500006
	M 8	7	20	16	8.4	10	13	10	EDTA - 45-25/8	20500007
	M 10	7	20	17	10.5	10	15	12	EDTA - 45-25/10	20500008
35	M 8	8.2	20	17	8.4	12.5	13	10	EDTA - 45-35/8	20500010
	M 10	8.2	20	19	10.5	12.5	15	12	EDTA - 45-35/10	20500011
	M 12	8.2	20	21	13	12.5	16	13	EDTA - 45-35/12	20500012
50	M 8	10	28	20	8.5	14.5	13	10	EDTA - 45-50/8	20500013
	M 10	10	28	22	10.5	14.5	15	12	EDTA - 45-50/10	20500014
	M 12	10	28	24	13	14.5	16	13	EDTA - 45-50/12	20500015
	M 14	10	28	24	15	14.5	19	16	EDTA - 45-50/14	20500016

COPPER TUBULAR 45° ANGLE CABLE LUGS (DIN 46235)


CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	B	D	E	C	G	H		
70	M 8	11.5	28	24	8.5	16.5	13	10	EDTA - 45-70/8	20500017
	M 10	11.5	28	24	10.5	16.5	15	12	EDTA - 45-70/10	20500018
	M 12	11.5	28	24	13	16.5	16	13	EDTA - 45-70/12	20500019
	M 14	11.5	28	24	15	16.5	19	16	EDTA - 45-70/14	20500020
95	M 10	13.5	35	28	10.5	19	15	12	EDTA - 45-95/10	20500021
	M 12	13.5	35	28	13	19	16	13	EDTA - 45-95/12	20500022
	M 14	13.5	35	28	15	19	16	16	EDTA - 45-95/14	20500023
120	M 10	15.5	35	30	10.5	21	15	12	EDTA - 45-120/10	20500024
	M 12	15.5	35	30	13	21	16	13	EDTA - 45-120/12	20500025
	M 14	15.5	35	30	15	21	19	16	EDTA - 45-120/14	20500026
	M 16	15.5	35	30	17	21	19	16	EDTA - 45-120/16	20500027
150	M 10	17	35	34	10.5	23.5	15	12	EDTA - 45-150/10	20500028
	M 12	17	35	34	13	23.5	16	13	EDTA - 45-150/12	20500029
	M 14	17	35	34	15	23.5	19	16	EDTA - 45-150/14	20500030
	M 16	17	35	34	17	23.5	19	16	EDTA - 45-150/16	20500031
	M 20	17	35	40	21	23.5	22	20	EDTA - 45-150/20	20500032
185	M 10	19	40	36	10.5	25.5	15	12	EDTA - 45-185/10	20500033
	M 12	19	40	36	13	25.5	16	13	EDTA - 45-185/12	20500034
	M 14	19	40	36	15	25.5	19	16	EDTA - 45-185/14	20500035
	M 16	19	40	36	17	25.5	19	16	EDTA - 45-185/16	20500036
	M 20	19	40	36	21	25.5	22	20	EDTA - 45-185/20	20500037
240	M 12	21.5	40	42	13	29	16	13	EDTA - 45-240/12	20500038
	M 14	21.5	40	42	15	29	19	16	EDTA - 45-240/14	20500039
	M 16	21.5	40	42	17	29	19	16	EDTA - 45-240/16	20500040
	M 20	21.5	40	42	21	29	22	20	EDTA - 45-240/20	20500041



Tube Dimensions in accordance with DIN 46235
Material : ETP Copper;
Surface : Tin Plated


COPPER CABLE LUGS-NARROW PALM FOR CIRCUIT BREAKER CABLE TERMINATION

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm						PRODUCT CODE	ECC ITEM CODE
		A	E	D	F	B	J		
35	M 6	8.2	6	15.0	3.0	21	41	ENCP-35/6	20600000
50	M 6	9.5	6	15.0	3.2	22	43	ENCP-50/6	20600001
	M 10	9.5	10	19	3.2	22	49	ENCP-50/10	20600002
70	M 6	11.2	6	17	3.3	24	45	ENCP-70/6	20600003
	M 10	11.2	10	19	3.3	24	51	ENCP-70/10	20600004
95	M 8	13.4	8	19	3.9	27	51	ENCP-95/8	20600005
	M 10	13.4	10	19	3.9	27	55	ENCP-95/10	20600006
120	M 8	15	8	19	5	30	61	ENCP-120/8	20600007
	M 10	15	10	19	5	30	61	ENCP-120/10	20600008
150	M 8	16.7	8	19	5.5	30	66	ENCP-150/8	20600009
	M 10	16.7	10	19	5.5	30	66	ENCP-150/10	20600010
185	M 10	18.4	10	31	5.7	38	82	ENCP-185/10	20600011
240	M 10	21.2	10	31	7.1	38	82	ENCP-240/10	20600012
300	M 10	23.5	10	31	7.8	42	87	ENCP-300/10	20600013



Material : ETP Copper;
Surface : Tin Plated

COPPER TUBULAR CABLE LUGS WITH INSPECTION WINDOW (BS 4579)




ETP Copper / Tin Plated
With / Without Inspection Window

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	E	B	D	J	J		
1.5	M 4	1.8	3.7	4.2	5.5	8	17	17	ECBT-1.5/4	20800000
	M 5	1.8	3.7	5.4	5.5	8	8	17	ECBT-1.5/5	20800001
	M 6	1.8	3.7	6.5	5.5	10	10	19	ECBT-1.5/6	20800002
2.5	M 4	2.4	4.0	4.2	8	8	8	21.5	ECBT-2.5/4	20800003
	M 5	2.4	4.0	5.4	8	8	8	21.5	ECBT-2.5/5	20800004
	M 6	2.4	4.0	6.5	8	10	10	24	ECBT-2.5/6	20800005
4	M 5	3.1	4.8	5.5	8	10	10	21	ECBT-4/5	20800006
	M 6	3.1	4.8	6.5	8	10	10	21	ECBT-4/6	20800007
	M 8	3.1	4.8	8.5	8	12	12	26.5	ECBT-4/8	20800008
6	M 5	3.8	5.5	5.4	10	10	10	23	ECBT-6/5	20800009
	M 6	3.8	5.5	6.5	10	10	10	23	ECBT-6/6	20800010
	M 8	3.8	5.5	8.5	10	12	12	27	ECBT-6/8	20800011
10	M 5	4.5	6.2	5.4	10	12	12	25.5	ECBT-10/5	20800012
	M 6	4.5	6.2	6.5	10	12	12	25.5	ECBT-10/6	20800013
	M 8	4.5	6.2	8.5	10	12	12	27.6	ECBT-10/8	20800014
16	M 5	5.4	7.1	5.5	13	12	12	31	ECBT-16/5	20800015
	M 6	5.4	7.1	6.5	13	12	12	31	ECBT-16/6	20800016
	M 8	5.4	7.1	8.5	13	12	12	31	ECBT-16/8	20800017
25	M 6	6.8	8.8	6.5	14	13	13	33	ECBT-25/6	20800018
	M 8	6.8	8.8	8.5	14	16	16	33	ECBT-25/8	20800019
	M 10	6.8	8.8	10.5	14	16	16	36.5	ECBT-25/10	20800020
35	M 6	8.2	10.6	6.5	14	15	15	38	ECBT-35/6	20800021
	M 8	8.2	10.6	8.5	14	15	15	38	ECBT-35/8	20800022
	M 10	8.2	10.6	10.5	14	15	15	40	ECBT-35/10	20800023
50	M 6	9.5	12.4	6.5	18	18	18	45	ECBT-50/6	20800024
	M 8	9.5	12.4	8.5	18	18	18	45	ECBT-50/8	20800025
	M 10	9.5	12.4	10.5	18	18	18	45	ECBT-50/10	20800026
	M 12	9.5	12.4	13	18	18	20	45	ECBT-50/12	20800027
70	M 6	11.3	14.6	6.5	20	21	21	52	ECBT-70/6	20800028
	M 8	11.3	14.6	8.5	20	21	21	52	ECBT-70/8	20800029
	M 10	11.3	14.6	10.5	20	21	21	52	ECBT-70/10	20800030
	M 12	11.3	14.6	13	20	21	21	52	ECBT-70/12	20800031
95	M 8	13.5	17.4	8.5	22	25	25	57	ECBT-95/8	20800032
	M 10	13.5	17.4	10.5	22	25	25	57	ECBT-95/10	20800033
	M 12	13.5	17.4	13	22	26	26	60	ECBT-95/12	20800034
	M 14	13.5	17.4	15	22	26	26	60	ECBT-95/14	20800035
120	M 8	15.0	19.4	8.5	24	28	28	63	ECBT-120/8	20800036
	M 10	15.0	19.4	10.5	24	28	28	63	ECBT-120/10	20800037
	M 12	15.0	19.4	13	24	28	28	63	ECBT-120/12	20800038
	M 14	15.0	19.4	15	24	28	28	63	ECBT-120/14	20800039
	M 16	15.0	19.4	17	24	28	28	63	ECBT-120/16	20800040
150	M 8	16.5	21.2	8.5	29	29	30	71	ECBT-150/8	20800041

ECBT Continued....


COPPER TUBULAR CABLE LUGS WITH INSPECTION WINDOW (BS 4579)

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	C	E	B	D	J		
150	M 10	16.5	21.2	10.5	29	39	30	71	ECBT-150/10	20800042
	M 12	16.5	21.2	13	29	29	30	71	ECBT-150/12	20800043
	M 14	16.5	21.2	15	29	30	30	71	ECBT-150/14	20800044
	M 16	16.5	21.2	17	29	39	30	71	ECBT-150/16	20800045
185	M 10	18.5	23.5	10.5	34	34	34	79	ECBT-185/10	20800046
	M 12	18.5	23.5	13	34	34	71	79	ECBT-185/12	20800047
	M 14	18.5	23.5	15	34	34	71	79	ECBT-185/14	20800048
	M 16	18.5	23.5	17	34	34	34	79	ECBT-185/16	20800049
240	M 10	21.0	26.5	10.5	39	38	98	93	ECBT-240/10	20800050
	M 12	21.0	26.5	13	39	38	98	93	ECBT-240/12	20800051
	M 14	21.0	26.5	15	39	38	98	93	ECBT-240/14	20800052
	M 16	21.0	26.5	17	39	38	98	93	ECBT-240/16	20800053
	M 20	21.0	26.5	21	39	38	98	93	ECBT-240/20	20800054
300	M 12	23.5	30.0	13	44	43	43	101	ECBT-300/12	20800055
	M 14	23.5	30.0	15	44	43	43	101	ECBT-300/14	20800056
	M 16	23.5	30.0	17	44	43	43	101	ECBT-300/16	20800057
	M 20	23.5	30.0	21	44	43	43	101	ECBT-300/20	20800058
400	M 12	26.8	34.8	13	47	49	49	116	ECBT-400/12	20800059
	M 14	26.8	34.8	15	47	49	49	116	ECBT-400/14	20800060
	M 16	26.8	34.8	17	47	49	49	116	ECBT-400/16	20800061
	M 20	26.8	34.8	21	47	49	49	116	ECBT-400/20	20800062
500	M 20	30.0	39.0	21	52	56.0	99	126	ECBT-500/20	20800063
630	M 16	35.0	45.0	17	59	65.0	9.0	146	ECBT-630/16	20800064
	M 20	35.0	45.0	21	59	65.0	9.6	146	ECBT-630/20	20800065
800	BL	39	50.6	-	78	72.9	7.9	171	ECBT-800/BL	20800066
1000	BL	43	56.2	-	90	80.8	8.8	202	ECBT-1000/BL	20800067



ETP Copper / Tin Plated
With / Without Inspection Window


COPPER TUBULAR CABLE LUGS (45° Angle) (BS 4579)

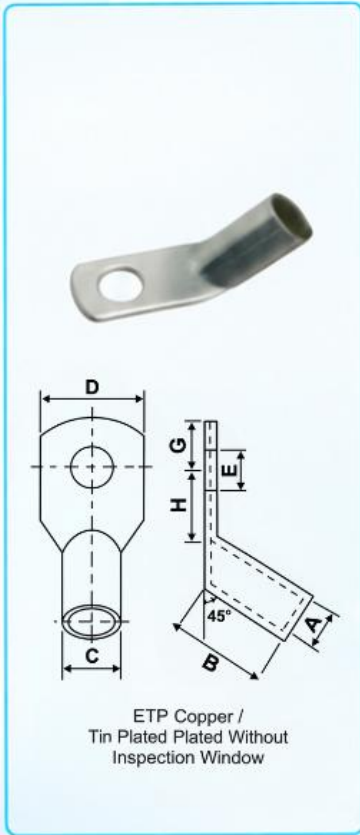

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	E	G	H		
6	M 4	3.8	5.5	9.5	9	4.2	4	7	ECBT-45-6/4	23200000
	M 5	3.8	5.5	9.5	9	5.2	4	7	ECBT-45-6/5	23200001
	M 6	3.8	5.5	10	9	6.2	5	9	ECBT-45-6/6	23200002
	M 8	3.8	5.5	12	9	8.4	7	11	ECBT-45-6/8	23200003
10	M 5	4.5	6.2	12	10	5.2	6	10	ECBT-45-10/5	23200004
	M 6	4.5	6.2	12	10	6.5	6	10	ECBT-45-10/6	23200005
	M 8	4.5	6.2	12	10	8.4	7	12	ECBT-45-10/8	23200006
16	M 5	5.4	7.1	12	13	5.2	7	10	ECBT-45-16/5	23200007
	M 6	5.4	7.1	12	13	6.5	7	10	ECBT-45-16/6	23200008
	M 8	5.4	7.1	12	13	8.4	7	12	ECBT-45-16/8	23200009
	M 10	5.5	7.9	16	13	10.5	10	13	ECBT-45-16/10	23200010
25	M 5	6.8	8.8	13	14	5.2	7	10	ECBT-45-25/5	23200011
	M 6	6.8	8.8	13	14	6.5	7	10	ECBT-45-25/6	23200012
	M 8	6.8	8.8	13	14	8.4	7	12	ECBT-45-25/8	23200013
	M 10	6.8	8.8	16	14	10.5	10	13	ECBT-45-25/10	23200014
35	M 6	8.2	10.6	15	16	6.5	9	12	ECBT-45-35/6	23200015
	M 8	8.2	10.6	15	16	8.4	9	12	ECBT-45-35/8	23200016
	M 10	8.2	10.6	18	16	10.5	10	13	ECBT-45-35/10	23200017
50	M 6	9.5	12.4	18	18	6.5	10	13	ECBT-45-50/6	23200018
	M 8	9.5	12.4	18	18	8.4	10	13	ECBT-45-50/8	23200019
	M 10	9.5	12.4	18	18	10.5	10	13	ECBT-45-50/10	23200020
70	M 8	11.3	14.6	21	20	8.4	10	13	ECBT-45-70/8	23200021
	M 10	11.3	14.6	21	20	10.5	10	17	ECBT-45-70/10	23200022
	M 12	11.3	14.6	21	20	13	12	17	ECBT-45-70/12	23200023
95	M 8	13.5	17.4	25	24	8.4	12	17	ECBT-45-95/8	23200024
	M 10	13.5	17.4	25	24	10.5	12	17	ECBT-45-95/10	23200025
	M 12	13.5	17.4	25	24	13	12	17	ECBT-45-95/12	23200026
	M 14	15	19.4	28	25	8.4	14	19	ECBT-45-120/8	23200027
120	M 10	15	19.4	28	25	10.5	14	19	ECBT-45-120/10	23200028
	M 12	15	19.4	28	25	13	14	19	ECBT-45-120/12	23200030
	M 14	15	19.4	28	25	17	14	19	ECBT-45-120/14	23200031
150	M 8	16.5	21.2	30	29	8.4	14	19	ECBT-45-150/8	23200032
	M 10	16.5	21.2	30	29	10.5	14	19	ECBT-45-150/10	23200033
	M 12	16.5	21.2	30	29	13	14	19	ECBT-45-150/12	23200034
185	M 10	18.5	23.5	34	30	10.5	17	22	ECBT-45-185/10	23200035
	M 12	18.5	23.5	34	30	13	17	22	ECBT-45-185/12	23200036
	M 14	18.5	23.5	34	30	14.5	17	22	ECBT-45-185/14	23200037
	M 16	18.5	23.5	34	30	17	17	22	ECBT-45-185/16	23200038
240	M 10	21	26.5	38	35	10.5	20	25	ECBT-45-240/10	23200039
	M 12	21	26.5	38	35	13	20	25	ECBT-45-240/12	23200040
	M 14	21	26.5	38	35	14.5	20	25	ECBT-45-240/14	23200041
	M 16	21	26.5	38	35	17	20	25	ECBT-45-240/16	23200042
300	M 12	23.5	30	43	42	13	22	27	ECBT-45-300/12	23200043
	M 14	23.5	30	43	42	14.5	22	27	ECBT-45-300/14	23200044
	M 16	23.5	30	43	42	17	22	27	ECBT-45-300/16	23200044


COPPER TUBULAR CABLE LUGS (45° Angle) (BS 4579)

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	E	G	H		
400	M 12	26.8	34.8	50	44	13	24	29	ECBT-45-400/12	23200045
	M 14	26.8	34.8	50	44	14.5	24	29	ECBT-45-400/14	23200046
	M 16	26.8	34.8	50	44	17	24	29	ECBT-45-400/16	23200047
	M 20	26.8	34.8	50	44	21	24	29	ECBT-45-400/20	23200048
	BL	26.8	34.8	50	44	24	53	–	ECBT-45-400-BL	23200049

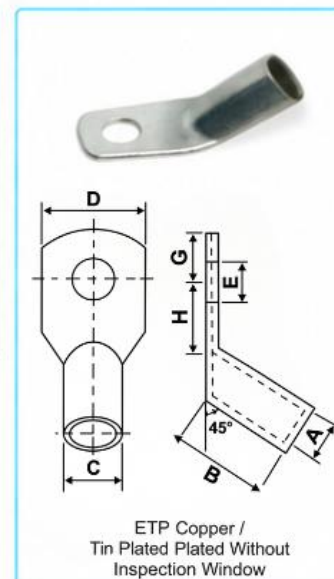


COPPER TUBULAR CABLE LUGS (90° Angle) (BS 4579)

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	E	G	H		
6	M 4	3.8	5.5	9.5	9	4.2	4	7	ECBT-90-6/4	23300000
	M 5	3.8	5.5	9.5	9	5.2	4	7	ECBT-90-6/5	23300001
	M 6	3.8	5.5	10	9	6.2	5	9	ECBT-90-6/6	23300002
10	M 5	4.5	8.2	12	10	5.2	6	10	ECBT-90-10/5	23300003
	M 6	4.5	8.2	12	10	6.5	6	10	ECBT-90-10/6	23300004
	M 8	4.5	8.2	12	10	8.4	7	12	ECBT-90-10/8	23300005
16	M 5	5.4	7.1	12	13	5.2	7	10	ECBT-90-16/5	23300006
	M 6	5.4	7.1	12	13	6.5	7	10	ECBT-90-16/6	23300007
	M 8	5.4	7.1	12	13	8.4	7	12	ECBT-90-16/8	23300008
25	M 5	6.8	8.8	13	14	5.2	7	10	ECBT-90-25/5	23300009
	M 8	6.8	8.8	13	14	8.4	7	12	ECBT-90-25/8	23300010
	M 10	6.8	8.8	16	14	10.5	10	13	ECBT-90-25/10	23300011
35	M 6	8.2	10.6	15	16	6.5	9	12	ECBT-90-35/6	23300012
	M 8	8.2	10.6	18	16	10.5	10	13	ECBT-90-35/8	23300013
	M 10	8.2	10.6	18	16	10.5	10	13	ECBT-90-35/10	23300014
50	M 6	9.5	12.4	18	18	6.5	10	13	ECBT-90-50/6	23300015
	M 8	9.5	12.4	18	18	8.4	10	13	ECBT-90-50/8	23300016
	M 10	9.5	12.4	18	18	10.5	10	13	ECBT-90-50/10	23300017
70	M 8	11.3	14.6	21	20	8.4	10	13	ECBT-90-70/8	23300018
	M 10	11.3	14.6	21	20	10.5	10	17	ECBT-90-70/10	23300019
	M 12	11.3	14.6	21	20	13	12	17	ECBT-90-70/12	23300020
95	M 8	13.5	17.4	25	24	8.4	12	17	ECBT-90-95/8	23300021
	M 10	13.5	17.4	25	24	10.5	12	17	ECBT-90-95/10	23300022
	M 12	13.5	17.4	25	24	13	12	17	ECBT-90-95/12	23300023

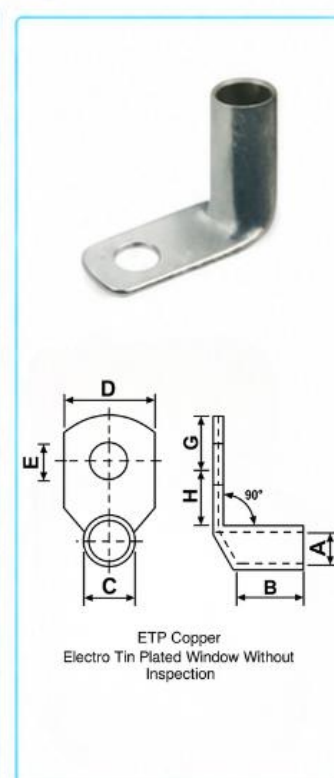



COPPER TUBULAR CABLE LUGS (90° Angle) (BS 4579)




ETP Copper
Electro Tin Plated Window Without
Inspection

CABLE SIZE mm ²	STUD SIZE E	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	E	G	H		
120	M 8	15	19.4	28	25	8.4	14	19	ECBT-90-120/8	23300026
	M 10	15	19.4	28	25	10.5	14	19	ECBT-90-120/10	23300027
	M 12	15	19.4	28	25	13	14	19	ECBT-90-120/12	23300028
150	M 8	16.5	21.2	30	29	8.4	14	19	ECBT-90-150/8	23300029
	M 10	16.5	21.2	30	29	10.5	14	19	ECBT-90-150/10	23300030
	M 12	16.5	21.2	30	29	13	14	19	ECBT-90-150/12	23300031
185	M 10	18.5	23.5	34	30	10.5	17	22	ECBT-90-185/10	23300032
	M 12	18.5	23.5	34	30	13	17	22	ECBT-90-185/12	23300033
	M 14	18.5	23.5	34	30	14.5	17	22	ECBT-90-185/14	23300034
	M 16	18.5	23.5	34	30	17	17	22	ECBT-90-185/16	23300035
240	M 10	21	26.5	38	35	10.5	20	25	ECBT-90-240/10	23300036
	M 12	21	26.5	38	35	13	20	25	ECBT-90-240/12	23300037
	M 14	21	26.5	38	35	14.5	20	25	ECBT-90-240/14	23300038
	M 16	21	26.5	38	35	17	20	25	ECBT-90-240/16	23300039
300	M 12	23.5	30.0	43	42	13	22	27	ECBT-90-300/12	23300040
	M 14	23.5	30.0	43	42	14.5	22	27	ECBT-90-300/14	23300041
	M 16	23.5	30.0	43	42	17	22	27	ECBT-90-300/16	23300042
400	M 12	26.8	34.8	50	44	13	24	29	ECBT-90-400/12	23300043
	M 14	26.8	34.8	50	44	14.5	24	29	ECBT-90-400/14	23300044
	M 16	26.8	34.8	50	44	17	24	29	ECBT-90-400/16	23300045
	M 20	26.8	34.8	50	44	21	24	29	ECBT-90-400/20	23300046
	BL	26.8	34.8	50	44	-	53	-	ECBT-90-400/BL	23300047

AWG Series

ECTL Series (Long Barrel cable lugs Single hole)



Electrolytic High
Conductivity Copper/
Tin Plated
With W/O Inspection Window


CONDUCTOR SIZE AWG	STUD HOLE ØE	DIMENSIONS mm								PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	D	G	H	J		
8 AWG	5.2	4.4	6.9	20.6	9.7	8	9.4	42.9	48.9	ECTL-8-10	23400000
	6.8	4.4	6.9	20.6	10.4	8	9.4	42.9	42.9	ECTL-8-1/4	23400001
	8.4	4.4	6.9	20.6	10.4	8	9.4	42.9	42.9	ECTL-8-5/16	23400002
6 AWG	5.2	5.0	7.4	28.4	10.4	6.5	7.1	48.3	-6.3	ECTL-6-10	23400003
	6.8	5.0	7.4	28.4	10.4	6.5	7.1	48.3	-6.3	ECTL-6-1/4	23400004
	10.2	5.0	7.4	28.4	*21.1	13	13.8	67.1	6.2	ECTL-6-3/8	23400005
	13.2	5.0	7.4	28.4	*21.1	13	13.8	67.1	67.3	ECTL-6-1/2	23400006
4 AWG	5.2	6.3	8.6	28.4	12.4	7	6.8	48.3	-6.3	ECTL-4-10	23400007
	6.8	6.3	8.6	28.4	*12.7	7	6.8	48.3	-6.3	ECTL-4-1/4	23400008
	8.4	6.3	8.6	28.4	*14.7	9.7	10.0	57.2	6.8	ECTL-4-5/16	23400009
	10.2	6.3	8.6	28.4	*14.7	9.7	10.0	57.2	4.8	ECTL-4-3/8	23400010
	13.2	6.3	8.6	28.4	*21.1	12.8	14.0	68.3	6.8	ECTL-4-1/2	23400011
2 AWG	5.2	7.8	10.6	31.8	15.5	10.0	9.4	56.0	47.0	ECTL-2-10	23400012
	6.8	7.8	10.6	31.8	15.5	10.0	9.4	56.0	67.5	ECTL-2-1/4	23400013
	8.4	7.8	10.6	31.8	15.5	10.0	9.4	58.2	-6.6	ECTL-2-5/16	23400014
	10.2	7.8	10.6	31.8	*21.1	14.1	14.0	73.2	67.3	ECTL-2-3/8	23400015
	13.2	7.8	10.6	31.8	*21.1	14.1	14.0	73.2	67.3	ECTL-2-1/2	23400016

*Special Palm width Lug

ECTL Series (Long Barrel cable lugs Single hole)

CONDUCTOR SIZE AWG	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	B	D	G	H	J		
1 AWG	5.2	9.0	11.7	35.1	17.3	17	18.7	78.7	ECTL-1-10	23400017
	8.4	9.0	11.7	35.1	17.3	17	18.7	78.7	ECTL-1-5/16	23400018
	10.2	9.0	11.7	35.1	17.3	17	18.7	78.7	ECTL-1-3/8	23400019
	13.2	9.0	11.7	35.1	21.1	17	18.7	77.7	ECTL-1-1/2	23400020
10 AWG	5.2	9.9	13.1	35.1	19.1	16	17.4	78.7	ECTL-10-10	23400021
	8.4	9.9	13.1	35.1	19.1	16	17.4	78.7	ECTL-10-5/16	23400022
	10.2	9.9	13.1	35.1	19.1	16	17.4	78.7	ECTL-10-3/8	23400023
	13.2	9.9	13.1	35.1	19.1	16	17.4	77.5	ECTL-10-1/2	23400024
20 AWG	8.4	11.3	14.3	38.1	20.8	16	16.4	81.3	ECTL-20-5/16	23400025
	10.2	11.3	14.3	38.1	20.8	16	16.4	81.3	ECTL-20-3/8	23400026
	13.2	11.3	14.3	38.1	20.8	16	16.4	81.5	ECTL-20-1/2	23400027
30 AWG	10.2	12.4	15.7	38.1	23.1	13	15.6	77.7	ECTL-30-3/8	23400028
	13.2	12.4	15.7	38.1	23.1	13	15.6	77.7	ECTL-30-1/2	23400029
30 AWG	10.2	12.4	15.7	38.1	25.1	14.5	16.6	75.7	ECTL-40-3/8	23400030
	13.2	14.2	17.6	41.1	25.4	14.5	14.4	82.0	ECTL-40-1/2	23400031
250 MCM	10.2	14.2	17.6	41.1	25.4	14.5	15.2	82.8	ECTL-250-3/8	23400032
	13.2	15.1	19.1	41.1	27.7	14.5	15.2	82.8	ECTL-250-1/2	23400033
300 MCM	8.4	16.5	20.7	50.8	30.5	15	15.9	93.7	ECTL-300-5/16	23400034
	10.2	16.5	20.7	50.8	30.5	15	15.9	93.7	ECTL-300-3/8	23400035
	13.2	16.5	20.7	50.8	30.5	15	15.9	93.7	ECTL-300-1/2	23400036
350 MCM	10.2	17.8	22.3	50.8	32.8	14	15.9	94.7	ECTL-350-3/8	23400037
	13.2	17.8	22.3	50.8	32.8	14	15.9	94.7	ECTL-350-1/2	23400038
400 MCM	10.2	19.3	24.2	53.8	35.1	18	19.6	104.1	ECTL-400-3/8	23400039
	13.2	19.3	24.2	53.8	35.1	18	19.6	104.1	ECTL-400-1/2	23400040
500 MCM	10.2	21.1	27.0	57.2	39.1	18	19.4	111.8	ECTL-500-3/8	23400041
	13.2	21.1	27.0	57.2	39.1	18	19.4	111.8	ECTL-500-1/2	23400042
600 MCM	13.2	23.4	30.1	68.3	43.4	18.5	19.6	121.7	ECTL-600-1/2	23400044
	16.8	23.4	30.1	68.3	43.4	18.5	19.6	121.9	ECTL-600-5/8	23400045
750 MCM	16.8	26.2	33.1	73.2	48.0	19	19.2	129.5	ECTL-750-1/2	23400047
	16.8	26.2	33.1	73.2	48.0	19	19.2	129.5	ECTL-750-5/8	23400048
1000 MCM	13.2	29.7	38.2	76.2	55.6	20	22.2	137.2	ECTL-1000-1/2	23400049
	16.8	29.7	38.2	76.2	55.6	20	22.2	137.2	ECTL-1000-5/8	23400050

*Special Palm width Lug

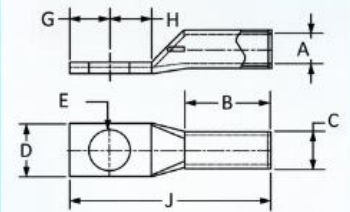


Electrolytic High
Conductivity Copper/
Tin Plated
With W/O Inspection Window

ECTS Series (Short Barrel cable lugs Single hole)


CONDUCTOR SIZE AWG	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	B	D	G	H	J		
8 AWG	5.2	4.4	6.9	11.18	10.7	6.0	9.8	32.0	ECTS-8-10	23500000
	6.8	4.4	6.9	11.18	10.7	8.0	7.8	32.0	ECTS-8-1/4	23500001
	8.4	4.4	6.9	11.18	10.7	8.0	5.3	30.0	ECTS-8-5/16	23500002
6 AWG	5.2	5.0	7.4	13.7	11.3	5.0	5.3	30.0	ECTS-6-10	23500003
	6.8	5.0	7.4	13.7	11.3	5.0	11.2	48.7	ECTS-6-1/4	23500004
	10.2	5.0	7.4	13.7	11.3	11.0	11.2	48.7	ECTS-6-3/8	23500005
4 AWG	5.2	6.3	8.6	20.5	14.7	10.0	11.2	48.7	ECTS-4-10	23500006
	6.8	6.3	8.6	20.5	14.7	11.0	10.2	48.7	ECTS-4-1/4	23500007

*Special Palm width Lug

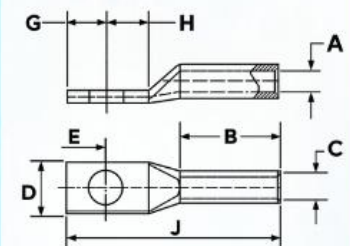

Electrolytic High
Conductivity Copper/Tin Plated
With/Without Inspection Window

ECTS Series (Short Barrel cable lugs Single hole)




Electrolytic High
Conductivity Copper/Tin Plated
With/Without Inspection Window

CONDUCTOR SIZE AWG	STUD HOLE (ϕ)	DIMENSIONS mm								PRODUCT CODE	ECC ITEM CODE
		A	C	B	D	F	G	H	J		
4 AWG	8.4	6.3	8.6	20.5	14.7	11.0	10.2	48.7		ECTS-4-5/16	23500006
	10.2	6.3	8.6	20.5	14.7	11.0	10.2	48.7		ECTS-4-3/8	23500007
	13.2	6.3	8.6	20.5	14.7	11.0	10.2	48.7		ECTS-4-1/2	23500008
2 AWG	8.4	7.8	10.6	18.0	22.3	14.5	15.1	58.9		ECTS-3-5/16	23500009
	10.2	7.8	10.6	18.0	22.3	14.5	15.1	58.9		ECTS-3-3/8	23500010
	13.2	7.8	10.6	18.0	22.3	14.5	15.1	58.9		ECTS-3-1/2	23500011
1 AWG	6.8	9.0	11.7	22.4	17.3	14.1	14.0	58.4		ECTS-1-1/4	23500012
	8.4	9.0	11.7	22.4	17.3	7.9	8.5	48.3		ECTS-1-5/16	23500013
	10.2	9.0	11.7	22.4	17.3	7.9	8.5	53.3		ECTS-1-3/8	23500014
	13.2	9.0	11.7	22.4	18.5	10.5	11.0	66.2		ECTS-1-1/2	23500015
1/0 AWG	6.8	9.9	13.1	22.4	19.1	7.9	10.0	50.8		ECTS-10-1/4	23500016
	8.4	9.9	13.1	22.4	19.1	7.9	10.0	50.8		ECTS-10-5/16	23500017
	10.2	9.9	13.1	22.4	19.1	9.7	10.5	53.1		ECTS-10-3/8	23500018
	13.2	9.9	13.1	22.4	19.1	13.1	13.5	58.4		ECTS-10-1/2	23500019
2/0 AWG	6.8	11.3	14.3	23.9	20.8	6.4	6.5	49.3		ECTS-20-1/4	23500020
	8.4	11.3	14.3	23.9	20.8	15.2	15.0	68.5		ECTS-20-5/16	23500021
	10.2	11.3	14.3	23.9	20.8	9.3	10.0	55.6		ECTS-20-3/8	23500022
	13.2	11.3	14.3	23.9	20.8	12.6	13.0	62.0		ECTS-20-1/2	23500023
3/0 AWG	8.4	12.4	15.7	25.4	23.1	16.0	9.0	54.9		ECTS-30-5/16	23500024
	10.2	12.4	15.7	25.4	23.1	10.0	10.5	54.4		ECTS-30-3/8	23500025
	13.2	12.4	15.7	25.4	23.1	13.1	13.5	64.5		ECTS-30-1/2	23500026
4/0 AWG	6.8	14.2	17.6	22.4	25.4	6.9	8.0	58.9		ECTS-40-1/4	23500027
	10.2	14.2	17.6	22.4	25.4	9.5	10.5	55.9		ECTS-40-5/16	23500028
	13.2	14.2	17.6	22.4	25.4	12.6	14.0	62.5		ECTS-40-3/8	23500029
	16.8	14.2	17.6	22.4	25.4	13.0	13.0	65.9		ECTS-40-1/2	23500030
250 MCM	8.4	15.1	18.1	28.9	27.7	7.5	8.0	55.9		ECTS-250-5/16	23500031
	10.2	15.1	18.1	28.9	27.7	7.5	8.0	55.9		ECTS-250-3/8	23500032
	13.2	15.1	18.1	28.9	27.7	10.0	11.9	61.5		ECTS-250-1/2	23500033
300 MCM	10.2	16.5	20.7	28.2	30.5	8.8	10.0	58.4		ECTS-300-3/8	23500034
	13.2	16.5	20.7	28.2	30.5	11.0	11.9	58.4		ECTS-300-1/2	23500035
	16.8	16.5	20.7	28.2	30.5	15.0	15.0	58.4		ECTS-300-5/8	23500036
350 MCM	10.2	17.8	22.3	32.8	32.8	10.1	11.0	63.5		ECTS-350-3/8	23500037
	13.2	17.8	22.3	32.8	32.8	10.6	11.0	63.9		ECTS-350-1/2	23500038
	16.8	17.8	22.3	32.8	32.8	13.4	14.5	78.2		ECTS-350-5/8	23500039
400 MCM	10.2	19.3	24.2	32.2	35.6	10.9	12.0	66.6		ECTS-400-3/8	23500040
	13.2	19.3	24.2	32.2	35.6	14.2	14.5	74.4		ECTS-400-1/2	23500041
	16.8	19.3	24.2	32.2	35.6	17.6	18.0	81.3		ECTS-400-5/8	23500042
	23.2	19.3	24.2	32.2	35.6	22.7	23.0	91.4		ECTS-400-3/4	23500043


ECTS Series (Short Barrel cable lugs Single hole)

CONDUCTOR SIZE AWG	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	B	D	G	H	J		
500 MCM	10.2	21.1	27.0	32.3	39.1	10.9	12.0	73.7	ECTS-500-3/8	23500050
	13.2	21.1	27.0	32.3	39.1	14.0	14.5	79.2	ECTS-500-1/2	23500051
	16.8	21.1	27.0	32.3	39.1	17.6	18.0	86.4	ECTS-500-5/8	23500052
	20.0	21.1	27.0	32.3	39.1	19.7	21.0	91.4	ECTS-500-3/4	23500053
	23.2	21.1	27.0	32.3	39.1	22.8	23.0	96.5	ECTS-500-7/8	23500054
600 MCM	13.2	23.4	30.1	35.1	43.4	14.3	15.0	83.8	ECTS-600-1/2	23500055
	16.8	23.4	30.1	35.1	43.4	19.4	20.0	94.0	ECTS-600-5/8	23500056
	20.0	23.4	30.1	35.1	43.4	19.4	20.0	94.0	ECTS-600-3/4	23500057
750 MCM	13.2	26.2	33.1	36.1	48.0	14.0	15.0	88.6	ECTS-750-1/2	23500058
	16.8	26.2	33.1	36.1	48.0	17.7	18.0	93.2	ECTS-750-5/8	23500059
	23.2	26.2	33.1	36.1	48.0	22.6	24.0	104.1	ECTS-750-7/8	23500060
1000 MCM	13.2	29.7	38.2	41.9	55.6	18.2	20.0	101.6	ECTS-1000-1/2	23500061
	16.8	29.7	38.2	41.9	55.6	18.2	20.0	101.6	ECTS-1000-5/8	23500062
	26.4	29.7	38.2	41.9	55.6	27.7	29.0	120.1	ECTS-1000-1	23500063




ECTL2 Series (Long Barrel cable lugs Double hole)

CONDUCTOR SIZE AWG	STUD HOLE (E)	TWO HOLE CENTER DIST. (J)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
			A	C	B	D	G	H	J		
8 AWG	6.8	15.88	4.4	6.9	20.6	10.7	8.5	8.3	59.2	ECTL2-8-1/4 I	23600000
	6.8	19.05	4.4	6.9	20.6	10.7	8.5	8.3	62.2	ECTL2-8-1/4 II	23600001
	6.8	25.4	5.0	7.4	28.4	10.7	8.0	8.0	67.3	ECTL2-6-1/4 I	23600003
6 AWG	6.8	25.4	5.0	7.4	28.4	*10.7	8.0	8.0	77.0	ECTL2-6-1/2 IV	23600003
	13.2	44.45	5.0	7.4	28.4	14.5	10.5	10.5	81.8	ECTL2-6-3/8 III	23600004
	10.2	19.05	5.0	7.4	28.4	14.5	10.5	10.5	75.4	ECTL2-6-3/8 II	23600005
4 AWG	6.8	15.88	6.3	8.6	28.4	12.7	8.5	8.5	68.6	ECTL2-4-1/4 I	23600006
	10.2	25.4	6.3	8.6	28.4	14.2	10.5	11.0	82.8	ECTL2-4-3/8 III	23600009
	13.2	44.45	6.3	8.6	28.8	20.6	15.5	17.0	113.0	ECTL2-4-1/2 IV	23600010
2 AWG	6.8	15.88	7.8	10.6	31.8	12.7	11.0	11.7	77.5	ECTL2-2-1/4 I	23600011
	8.4	19.05	7.8	10.6	31.8	15.5	11.0	11.7	80.5	ECTL2-2-5/16 II	23600013
	10.2	44.45	7.8	10.6	31.8	15.5	11.0	11.7	105.9	ECTL2-2-3/8 IV	23600014
	10.2	25.4	7.8	10.6	31.8	*21.1	11.0	11.7	105.9	ECTL2-2-3/8 III	23600015
	13.2	44.45	7.8	10.6	31.8	17.3	16.0	18.9	93.5	ECTL2-2-1/2 IV	23600016
1 AWG	6.8	19.05	9.0	11.7	35.1	17.3	16.0	18.9	96.5	ECTL2-1-1/4 II	23600017
	8.4	19.05	9.0	11.7	35.1	17.3	16.0	18.9	96.5	ECTL2-1-5/16 II	23600019
	10.2	25.4	9.0	11.7	35.1	17.3	16.0	18.9	102.9	ECTL2-1-3/8 III	23600020
	13.2	44.45	9.0	11.7	35.1	21.1	16.0	18.9	112.4	ECTL2-1-1/2 III	23600021



*Special Palm width Lug

ECTL2 Series (Long Barrel cable lugs Double hole)





Electrolytic High
Conductivity Copper/
Tin Plated

CONDUCTOR SIZE AWG	STUD HOLE (E)	TWO HOLE CENTER DIST. (L)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
			A	C	B	D	G	H	J		
1/0 AWG	6.8	15.88	9.9	13.1	35.1	19.1	16.0	17.7	91.9	ECTL2-10-1/4 II	236000022
	6.8	19.05	9.9	13.1	35.1	19.1	16.0	17.7	95.3	ECTL2-10-1/4 II	236000023
	8.4	25.4	9.9	13.1	35.1	19.1	16.0	17.7	102.0	ECTL2-10-5/16 II	236000024
	10.2	25.4	9.9	13.1	35.1	19.1	16.0	17.7	102.0	ECTL2-10-3/8 II	236000025
	10.2	44.45	9.9	13.1	35.1	19.1	16.0	17.7	121.9	ECTL2-10-3/8 IV	236000026
	13.2	44.45	9.9	13.1	35.1	*20.6	16.0	17.7	112.2	ECTL2-10-1/2 IV	236000027
20 AWG	6.8	15.88	11.3	14.3	38.1	20.8	16.0	16.7	96.3	ECTL2-20-1/4 I	236000028
	6.8	19.05	11.3	14.3	38.1	20.8	16.0	16.7	99.1	ECTL2-20-1/4 II	236000029
	10.2	25.4	11.3	14.3	38.1	20.8	16.0	16.7	105.4	ECTL2-20-3/8 II	236000030
	13.2	44.45	11.3	14.3	38.1	20.8	16.0	16.7	126.2	ECTL2-20-3/8 IV	236000031
	20.0	44.45	11.3	14.3	38.1	*28.0	16.0	18.0	130.5	ECTL2-20-3/4 IV	236000032
30 AWG	6.8	19.05	12.4	15.7	38.1	23.1	16.0	17.7	101.6	ECTL2-30-1/4 II	236000033
	10.2	25.4	12.4	15.7	38.1	23.1	16.0	17.7	108.0	ECTL2-30-3/8 II	236000034
	13.2	44.45	12.4	15.7	38.1	23.1	16.0	17.7	127.3	ECTL2-30-3/8 IV	236000035
	13.2	25.4	12.4	15.7	38.1	23.1	16.0	17.7	108.0	ECTL2-30-1/2 II	236000036
40 AWG	6.8	19.05	14.2	17.6	41.1	25.4	16.0	17.7	105.4	ECTL2-40-1/4 II	236000037
	10.2	44.45	14.2	17.6	41.1	25.4	16.0	17.7	130.8	ECTL2-40-3/8 IV	236000038
	10.2	25.4	14.2	17.6	41.1	25.4	16.0	17.7	111.8	ECTL2-40-3/8 II	236000039
	13.2	44.45	14.2	17.6	41.1	25.4	16.0	17.7	131.3	ECTL2-40-1/2 IV	236000040
250 MCM	10.2	25.4	15.1	19.1	41.1	27.7	17.0	17.7	113.3	ECTL2-250-3/8 II	236000041
	13.2	44.45	15.1	19.1	41.1	27.7	17.0	17.7	132.3	ECTL2-250-1/2 IV	236000042
300 MCM	10.2	25.4	16.5	20.7	50.8	30.5	18.0	18.0	124.2	ECTL2-300-3/8 II	236000043
	13.2	44.45	16.5	20.7	50.8	30.5	18.0	18.0	143.3	ECTL2-300-1/2 IV	236000044
	20.0	44.45	16.5	20.7	50.8	30.5	18.0	18.0	143.3	ECTL2-300-3/4 IV	236000045
350 MCM	6.8	19.05	17.8	22.3	50.8	32.8	17.0	18.0	115.6	ECTL2-350-1/4 II	236000046
	10.2	25.4	17.8	22.3	50.8	32.8	17.0	18.0	123.2	ECTL2-350-3/8 II	236000047
	13.2	25.4	17.8	22.3	50.8	32.8	17.0	18.0	144.3	ECTL2-350-1/2 II	236000048
400 MCM	10.2	17.8	22.3	24.2	53.8	35.1	18.0	18.3	127.0	ECTL2-400-3/8 II	236000049
	13.2	19.3	24.2	24.2	53.8	35.1	18.0	18.3	148.6	ECTL2-400-1/2 IV	236000050
500 MCM	10.2	19.3	21.1	27.0	57.2	39.1	17.0	18.3	123.2	ECTL2-500-1/4 II	236000051
	13.2	15.4	21.1	27.0	57.2	39.1	17.0	18.3	129.5	ECTL2-500-3/8 II	236000052
600 MCM	10.2	25.4	23.4	30.1	68.3	43.4	18.0	18.6	142	ECTL2-600-3/8 II	236000053
	13.2	44.45	23.4	30.1	68.3	43.4	18.0	18.6	167.4	ECTL2-600-1/2 IV	236000054
750 MCM	10.2	25.4	26.2	33.1	73.2	48.0	18.0	18.9	149.1	ECTL2-750-3/8 II	236000055
	13.2	44.45	26.2	33.1	73.2	48.0	18.0	18.9	174.5	ECTL2-750-1/2 IV	236000056
1000 MCM	10.2	29.7	38.2	38.2	76.2	55.6	20.0	20.7	156.0	ECTL2-1000-3/8 II	236000058
	13.2	44.45	29.7	38.2	76.2	55.6	20.0	20.7	181.4	ECTL2-1000-1/2 IV	236000059

*Special Palm width Lug


COPPER CABLE LUGS WITH FLARE ENTRY (BELL SHAPE)

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	G	H	J		
10	5.2	4.5	6.2	11	10	6	7	26	ECBM-10/5	20700000
	6.5	4.5	6.2	11	10	6	7	26	ECBM-10/6	20700001
	8.4	4.5	6.2	12	10	6	9	28	ECBM-10/8	20700002
	10.5	4.5	6.8	15	11	8	11	33	ECBM-10/10	20700003
16	5.2	5.4	7.1	12	12	7	7	30	ECBM-16/5	20700004
	6.5	5.4	7.1	12	12	7	7	30	ECBM-16/6	20700005
	8.4	5.4	7.1	12	12	7	7	30	ECBM-16/8	20700006
	10.5	5.4	7.6	15	12	8	12	36	ECBM-16/10	20700007
25	6.5	6.8	8.8	13	12	7	7	30	ECBM-25/6	20700008
	8.4	6.8	8.8	13	12	7	7	30	ECBM-25/8	20700009
	10.5	6.8	8.8	15	13	10	11	38	ECBM-25/10	20700010
35	6.5	8.2	10.6	15.3	13.5	9	9	37	ECBM-35/6	20700011
	8.4	8.2	10.6	15.3	13.5	9	9	37	ECBM-35/8	20700012
	10.5	8.2	10.6	15.3	13.5	9	9	37	ECBM-35/10	20700013
50	6.5	9.5	12.4	17.8	17	9	10	42	ECBM-50/6	20700014
	8.4	9.5	12.4	17.8	17	9	10	42	ECBM-50/8	20700015
	10.5	9.5	12.4	17.8	17	9	10	42	ECBM-50/10	20700016
70	8.4	11.3	14.6	21	18.5	11	11	47	ECBM-70/8	20700017
	10.5	11.3	14.6	21	18.5	11	11	47	ECBM-70/10	20700018
	13	11.3	14.6	21	18.5	11	11	47	ECBM-70/12	20700019
95	8.4	13.5	17.4	25	21	12	13	53	ECBM-95/8	20700020
	10.5	13.5	17.4	25	21	12	13	53	ECBM-95/10	20700021
	13	13.5	17.4	25	21	12	13	53	ECBM-95/12	20700022
	14.5	13.5	17.4	25	22	14	15	55	ECBM-95/14	20700023
120	8.4	15	19.4	28	23	13	14	60	ECBM-120/8	20700024
	10.5	15	19.4	28	23	13	14	60	ECBM-120/10	20700025
	13	15	19.4	28	23	13	14	60	ECBM-120/12	20700026
	14.5	15	19.4	28	23	13	14	60	ECBM-120/14	20700027
150	8.4	16.5	21.2	30	27	16	16	70	ECBM-150/8	20700028
	10.5	16.5	21.2	30	27	16	16	70	ECBM-150/10	20700029
	13	16.5	21.2	30	27	16	16	70	ECBM-150/12	20700030
	14.7	16.5	21.2	30	27	16	16	70	ECBM-150/14	20700031
185	10.5	18.5	23.5	34	32	17	19	80	ECBM-185/10	20700032
	13	18.5	23.5	34	32	17	19	80	ECBM-185/12	20700033
	14.7	18.5	23.5	34	32	17	19	80	ECBM-185/14	20700034
	17	18.5	23.5	34	32	17	19	80	ECBM-185/16	20700035
240	10.5	21	26.5	38	39	20	21	94	ECBM-240/10	20700036
	13	21	26.5	38	39	20	21	94	ECBM-240/12	20700037
	14.5	21	26.5	38	39	20	21	94	ECBM-240/14	20700038
	17	21	26.5	38	39	20	21	94	ECBM-240/16	20700039



Electrolytic High Conductivity Copper
Electro Tin Plated With / Without
Inspection Window

COPPER RING TONGUE TERMINAL ENDS




Material : Copper IS : 1897
Finish : Tin Plated

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	F	B	L-1	J		
10	3.2	1.6	3.2	6.8	0.75	5	9.6	13.0	ER-153	20900000
	3.7	1.6	3.2	6.8	0.75	5	9.6	13.0	ER-048	20900001
	4.2	1.6	3.2	6.8	0.75	5	9.6	13.0	ER-049	20900002
	8.4	1.6	3.2	6.0	0.75	5	11.0	14.0	ER-103	20900003
	10.5	1.6	3.2	6.8	0.75	5	11.0	14.0	ER-001	20900004
	5.2	1.6	3.2	6.0	0.75	5	11.0	14.0	ER-002	20900005
	6.5	1.6	3.2	6.0	0.75	5	11.0	14.0	ER-003	20900006
16	5.2	1.6	3.2	7.1	0.75	5	11.0	14.0	ER-154	20900007
	6.5	1.6	3.2	8.0	0.75	5	12.0	16.0	ER-104	20900008
	8.4	1.6	3.2	8.0	0.75	5	12.0	16.0	ER-004	20900009
	10.5	1.6	3.2	8.0	0.75	5	12.0	16.0	ER-005	20900010
25	6.5	1.6	3.2	10	0.75	5	13.0	18.0	ER-105	20900011
	8.4	1.6	3.2	10	0.75	5	13.0	18.0	ER-006	20900012
	10.5	1.6	3.2	12	0.75	5	13.0	18.0	ER-007	20900013
35	6.5	2.3	3.9	6.5	0.75	5	9.5	12.7	ER-106	20900014
	3.2	2.3	3.9	6.5	0.75	5	9.5	12.7	ER-107	20900015
	3.7	2.3	3.9	8.0	0.75	5	12.0	16.0	ER-008	20900016
50	3.7	2.3	3.9	8.0	0.75	5	12.0	16.0	ER-108	20900017
	4.2	2.3	3.9	8.0	0.75	5	12.0	16.0	ER-009	20900018
	5.4	2.3	3.9	10	0.75	5	13.0	18.0	ER-010	20900019
70	5.4	2.3	3.9	10	0.75	5	13.0	18.0	ER-109	20900020
	6.2	2.3	3.9	12	0.75	5	16.0	22.0	ER-011	20900021
	8.4	2.3	3.9	12	0.75	5	16.0	22.0	ER-012	20900022
	6.2	2.3	3.9	16	0.75	5	17.0	25.0	ER-013	20900024
95	8.4	2.3	3.9	16	0.75	5	17.0	25.0	ER-111	20900025
	10.5	2.3	3.9	16	0.75	5	17.0	25.0	ER-014	20900026
	10.5	2.3	3.9	18	0.75	5	20.0	29.0	ER-015	20900027
	12.7	2.3	3.9	18	0.75	5	20.0	29.0	ER-151	20900028
120	8.4	3.5	5.5	8.0	0.95	6	13.0	17.0	ER-047	20900029
	4.2	3.5	5.5	8.0	0.95	6	13.0	17.0	ER-155	20900030
	5.4	3.5	5.5	10	0.95	6	14.0	19.0	ER-050	20900031
	5.4	3.5	5.5	10	0.95	6	14.0	19.0	ER-112	20900032
150	6.4	3.5	5.5	12	0.95	6	14.0	20.0	ER-016	20900033
	8.4	3.5	5.5	12	0.95	6	14.0	20.0	ER-113	20900034
	5.2	3.5	5.5	12	0.95	6	16.0	22.0	ER-017	20900035
	6.4	3.5	5.5	12	0.95	6	16.0	22.0	ER-018	20900036
185	8.4	3.5	5.5	14	0.95	6	18.5	25.5	ER-114	20900037
	10.2	3.5	5.5	14	0.95	6	18.5	25.5	ER-019	20900038
240	8.4	3.5	5.5	16	0.95	6	22.0	30.0	ER-115	20900039
	10.4	3.5	5.5	16	0.95	6	22.0	30.0	ER-020	20900040
	8.4	3.5	5.5	16	0.95	6	22.0	30.0	ER-116	20900041
	10.4	3.5	5.5	16	0.95	6	22.0	30.0	ER-022	20900043


COPPER RING TONGUE TERMINAL ENDS

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	F	B	L-1	J		
4.6	8.4	3.5	5.5	18	0.95	6	21.0	30.0	ER-117	20900044
	10.2	3.5	5.5	18	0.95	6	21.0	30.0	ER-023	20900045
	12.5	3.5	5.5	18	0.95	6	21.0	30.0	ER-024	20900046
10	4.2	4.3	6.3	10	0.95	8	17.0	22.0	ER-118	20900047
	5.4	4.3	6.3	10	0.95	8	17.0	22.0	ER-025	20900048
	4.2	4.3	6.3	10	0.95	8	15.0	20.0	ER-119	20900049
	5.4	4.3	6.3	10	0.95	8	15.0	20.0	ER-026	20900040
	6.4	4.3	6.3	12	0.95	8	17.0	23.0	ER-120	20900051
	8.4	4.3	6.3	16	0.95	8	19.0	27.0	ER-121	20900052
	8.4	4.3	6.3	18	0.95	8	21.0	30.0	ER-122	20900053
	10.5	4.3	6.3	18	0.95	8	21.0	30.0	ER-027	20900054
	10.5	4.3	6.3	22	0.95	8	23.0	34.0	ER-123	20900055
16	12.5	4.3	6.3	22	0.95	8	23.0	34.0	ER-028	20900056
	5.4	5.6	8.0	10	1.15	10	19.0	24.0	ER-124	20900057
	5.4	5.6	8.0	12	1.15	10	20.0	26.0	ER-125	20900058
	6.4	5.6	8.0	12	1.15	10	20.0	26.0	ER-029	20900059
	6.4	5.6	8.0	16	1.15	10	22.0	30.0	ER-126	20900060
	8.4	5.6	8.0	16	1.15	10	22.0	30.0	ER-030	20900061
	10.2	5.6	8.0	16	1.15	10	22.0	30.0	ER-031	20900062
	8.4	5.6	8.0	18	1.15	10	24.0	33.0	ER-127	20900063
	10.2	5.6	8.0	18	1.15	10	24.0	33.0	ER-032	20900064
25	10.2	5.6	8.0	22	1.15	10	24.0	35.0	ER-128	20900065
	12.5	5.6	8.0	22	1.15	10	24.0	35.0	ER-033	20900066
	6.4	7.5	11.1	12	1.75	11	25.0	31.0	ER-156	20900067
	8.4	7.5	11.1	12	1.75	11	25.0	31.0	ER - 051	20900068
	6.4	7.5	11.1	16	1.75	11	22.0	30.0	ER - 129	20900069
25	8.4	7.5	11.1	16	1.75	11	22.0	30.0	ER - 034	20900070
	10.5	7.5	11.1	16	1.75	11	22.0	30.0	ER - 035	20900071
	6.4	7.5	11.1	18	1.75	11	25.0	33.0	ER - 130	20900072
	8.4	7.5	11.1	18	1.75	11	25.0	34.0	ER - 036	20900073
35	10.5	7.5	11.1	22	1.75	11	31.0	42.0	ER - 131	20900074
	12.5	7.5	11.1	22	1.75	11	31.0	42.0	ER - 132	20900075
	6.4	9.0	12.6	16	1.75	12	23.0	31.0	ER - 037	20900076
	8.4	9.0	12.6	16	1.75	12	23.0	31.0	ER - 133	20900077
35	8.4	9.0	12.6	18	1.75	12	27.0	36.0	ER - 038	20900078
	10.5	9.0	12.6	18	1.75	12	27.0	36.0	ER - 134	20900079
	10.5	9.0	12.6	22	1.75	12	31.0	42.0	ER - 135	20900080
	12.5	9.0	12.6	22	1.75	12	31.0	42.0	ER - 040	20900081
50	8.4	10.5	14.1	18	1.75	16	34.0	43.0	ER - 136	20900083
	10.5	10.5	14.1	18	1.75	16	34.0	43.0	ER - 041	20900084
	10.5	10.5	14.1	22	1.75	16	32.0	43.0	ER - 137	20900085
50	10.5	10.5	14.1	24	1.75	16	36.0	48.0	ER - 138	20900086
	12.5	10.5	14.1	24	1.75	16	36.0	48.0	ER - 042	20900087
50	17.0	10.5	14.1	32	1.75	16	38.0	54.0	ER - 139	20900088
70	10.5	12.0	16.0	22	1.95	18	36.0	47.0	ER - 140	20900089
	12.5	12.0	16.0	22	1.95	18	36.0	47.0	ER - 043	20900090




Material : Copper IS : 1897
Finish : Tin Plated

COPPER RING TONGUE TERMINAL ENDS

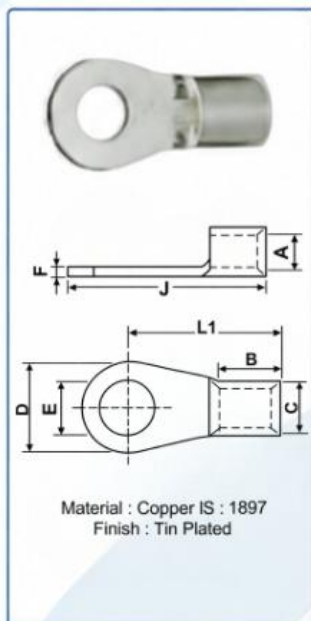


CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	F	B	L - 1	J		
70	12.5	12.0	16.0	24	1.95	18	36.0	48.0	ER- 141	20900091
70	17.0	12.0	16.0	28	1.95	18	40.0	54.0	ER- 142	20900092
95	10.5	13.5	18.1	22	2.25	20	35.0	46.0	ER- 143	20900093
95	10.5	13.5	18.1	24	2.25	20	38.0	50.0	ER- 144	20900094
	12.5	13.5	18.1	24	2.25	20	38.0	50.0	ER- 044	20900095
95	12.5	13.5	18.1	28	2.25	20	44.0	58.0	ER- 145	20900096
	17.0	13.5	18.1	28	2.25	22	44.0	58.0	ER- 145	20900097
120	12.5	15.0	20.2	26	2.55	22	39.0	52.0	ER- 146	20900097
120	17.0	15.0	20.2	32	2.55	22	48.0	64.0	ER- 147	20900098
150	12.7	16.5	23.7	34	3.55	24	49.0	66.0	ER- 149	20900099
	17.0	16.5	23.7	34	3.55	24	49.0	66.0	ER- 045	20900100

COPPER PIN TYPE TERMINAL ENDS Insulated

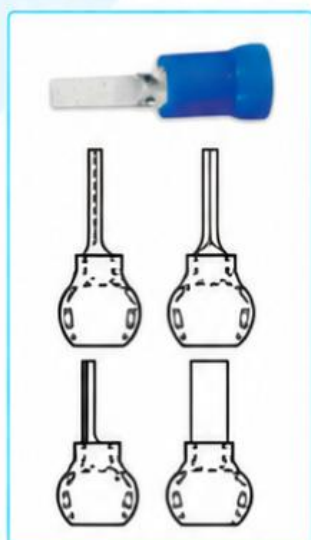


CABLE SIZE mm ²	DIMENSIONS mm											PRODUCT CODE	ECC ITEM CODE
	A	C	D	F	F1	B	S+H	J	C-1	J-1	TYPE		
1.5	1.6	3.2	1.9	0.75	-	5	12	17	5.8	10	I	EPI-17	21000000
1.5	1.6	3.2	3.2	0.75	-	5	12	17	5.8	10	II	EPI-40	21000001
2.5	2.3	3.9	1.9	0.75	-	5	12	17	6.5	10	II	EPI-18	21000002
2.5	2.3	3.9	3.1	0.75	-	5	12	17	6.5	10	II	EPI-19	21000003
4.0	2.9	4.9	2.7	0.95	-	6	14	20	8.0	14	II	EPI-20	21000004
4.0	3.6	5.6	5.1	0.95	-	6	14	20	8.0	14	II	EPI-21	21000005
6.0	3.6	5.6	2.7	0.95	-	6	14	20	8.0	14	II	EPI-22	21000006
6.0	4.0	6.0	2.7	0.95	-	6	14	20	8.0	14	II	EPI-23	21000007
10	4.5	6.7	4.3	0.95	2.4	8	14	22	9.0	17	II	EPI-24	21000008
16	5.8	8.2	5.5	1.15	2.6	10	17	26	11	20	III	EPI-25	21000009


TYPE : I

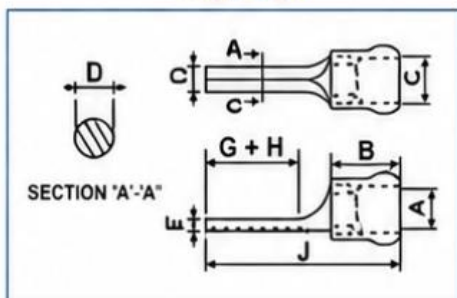

TYPE : II

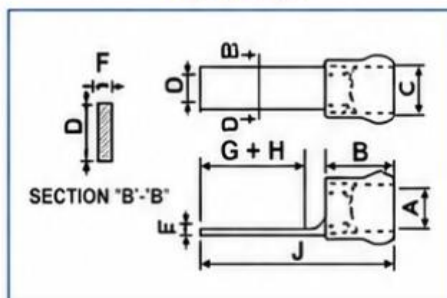


TYPE : III

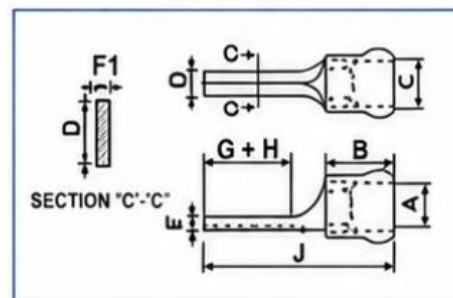

COPPER RING TONGUE TERMINAL ENDS - Insulated

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm									PRODUCT CODE	ECC ITEM CODE
		A	C	D	F	B	J	J-1	L-3	C-1		
1.5	2.0	1.6	3.2	6.0	0.75	5	14	10	16	5.8	ERI - 052	211000001
	3.0	1.6	3.2	6.0	0.75	5	14	10	16	5.8	ERI - 054	211000001
	3.5	1.6	3.2	6.0	0.75	5	14	10	16	5.8	ERI - 055	211000002
	4.0	1.6	3.2	6.0	0.75	5	14	10	16	5.8	ERI - 056	211000003
1.5	3.0	1.6	3.2	6.8	0.75	5	13	10	14.6	5.8	ERI - 057	211000004
	3.5	1.6	3.2	6.8	0.75	5	13	10	14.6	5.8	ERI - 058	211000005
	4.0	1.6	3.2	6.8	0.75	5	13	10	14.6	5.8	ERI - 059	211000006
	3.0	1.6	3.2	8.0	0.75	5	16	10	17	5.8	ERI - 060	211000007
	4.0	1.6	3.2	8.0	0.75	5	16	10	17	5.8	ERI - 061	211000008
	5.0	1.6	3.2	8.0	0.75	5	16	10	17	5.8	ERI - 062	211000009
1.5	4.0	1.6	3.2	7.0	0.75	5	14.5	10	16	5.8	ERI - 063	211000010
	4.0	1.6	3.2	10	0.75	5	18	10	18	5.8	ERI - 064	211000011
1.5	5.0	1.6	3.2	10	0.75	5	18	10	18	5.8	ERI - 065	211000012
	6.0	1.6	3.2	10	0.75	5	18	10	18	5.8	ERI - 066	211000013
1.5	6.0	1.6	3.2	12	0.75	5	18	10	17	5.8	ERI - 067	211000014
2.5	3.0	2.3	3.9	6.5	0.75	5	12.7	10	14.5	6.5	ERI - 068	211000015
	3.5	2.3	3.9	6.5	0.75	5	12.7	10	14.5	6.5	ERI - 069	211000016
	3.5	2.3	3.9	8.0	0.75	5	16	10	17	6.5	ERI - 070	211000017
	4.0	2.3	3.9	8.0	0.75	5	16	10	17	6.5	ERI - 071	211000018
	5.0	2.3	3.9	10	0.75	5	18	10	17	6.5	ERI - 072	211000019
	5.0	2.3	3.9	10	0.75	5	18	10	18	6.5	ERI - 073	211000020
	6.0	2.3	3.9	10	0.75	5	18	10	18	6.5	ERI - 074	211000021
2.5	5.0	2.3	3.9	12	0.75	5	22	10	21	6.5	ERI - 075	211000022
	6.0	2.3	3.9	12	0.75	5	22	10	21	6.5	ERI - 076	211000023
	8.0	2.3	3.9	12	0.75	5	22	10	21	6.5	ERI - 077	211000024
	6.0	2.3	3.9	16	0.75	5	25	10	22	6.5	ERI - 078	211000025
2.5	8.0	2.3	3.9	16	0.75	5	25	10	22	6.5	ERI - 079	211000026
	10	2.3	3.9	16	0.75	5	25	10	22	6.5	ERI - 080	211000027
	10	2.3	3.9	16	0.75	5	29	10	25	6.5	ERI - 081	211000028
	12	2.3	3.9	18	0.75	5	29	10	25	6.5	ERI - 082	211000029
4 - 6	4.0	3.5	5.5	8.0	0.95	6	17	14	21	8.0	ERI - 083	211000030
	5.0	3.5	5.5	8.0	0.95	6	17	14	21	8.0	ERI - 084	211000031
	4.0	3.5	5.5	10	0.95	6	19	14	22	8.0	ERI - 085	211000032
	5.0	3.5	5.5	10	0.95	6	19	14	22	8.0	ERI - 086	211000033
	6.0	3.5	5.5	12	0.95	6	20	14	22	8.0	ERI - 087	211000034
	8.0	3.5	5.5	12	0.95	6	20	14	22	8.0	ERI - 089	211000035
4 - 6	5.0	3.5	5.5	12	0.95	6	22	14	24	8.0	ERI - 090	211000036
	6.0	3.5	5.5	12	0.95	6	22	14	24	8.0	ERI - 091	211000037
	8.0	3.5	5.5	14	0.95	6	25.5	14	26.5	8.0	ERI - 092	211000038
	9.5	3.5	5.5	14	0.95	6	25.5	14	26.5	8.0	ERI - 093	211000039
	8.0	3.5	5.5	16	0.95	6	30	14	30	8.0	ERI - 094	211000040
	10	3.5	5.5	18	0.95	6	30	14	30	8.0	ERI - 095	211000041
	8.0	3.5	5.5	18	0.95	6	30	14	29	8.0	ERI - 097	211000042
	10	3.5	5.5	18	0.95	6	30	14	29	8.0	ERI - 098	211000043
	12	3.5	5.5	18	0.95	6	30	14	29	8.0	ERI - 099	211000044
10	8	4.3	6.3	16	0.95	8	27	18	27	9.0	ERI - 101	211000047
16	8	5.6	8.0	16	1.15	10	30	20	32	11.0	ERI - 102	211000048






Colour Coding of Insulation Sleeve
Size : 1.5, 2.5, 4, 6, 10
Color : Red, Blue, Yellow, Black

COPPER PIN TYPE TERMINAL ENDS suitable for contactors, switches & terminal blocks






CABLE SIZE mm ²	DIMENSIONS mm									PRODUCT CODE	ECC ITEM CODE
	A	C	D	F	F1	B	G + H	J	TYPE		
1.5	1.6	3.2	1.9	-	0.75	5.0	12	17	I	EP-9	21200000
1.5	1.6	3.2	3.2	-	0.75	5.0	12	17	II	EP-35	21200001
2.5	2.3	3.9	1.9	-	0.75	5.0	12	17	I	EP-1	21200002
2.5	2.3	3.9	3.1	-	0.75	5.0	14	17	II	EP-2	21200003
4.0	2.9	4.9	2.7	-	0.95	6.0	14	20	I	EP-3	21200004
4.0	3.6	5.6	5.1	-	0.95	6.0	14	20	II	EP-4	21200005
6.0	3.6	5.6	2.7	-	0.95	6.0	14	20	I	EP-5	21200006
6.0	3.6	5.6	2.7	-	0.95	6.0	14	20	II	EP-6	21200007
10	4.5	6.7	4.3	2.4	0.95	8.0	14	22	III	EP-7	21200008
16	5.8	8.2	5.5	2.6	1.15	10	17	27	III	EP-8	21200009
25	7.5	11.1	7.2	1.75	3.8	11	22	33	III	EP-125	21200010
35	9.0	12.6	8.2	1.75	3.8	12	21	33	III	EP-135	21200011
50	10.5	14.1	9.0	1.75	3.8	16	25	41	III	EP-150	21200012
70	12	16.0	10.0	1.95	4.1	16	30	41	III	EP-170	21200013

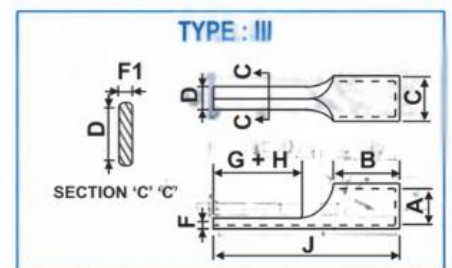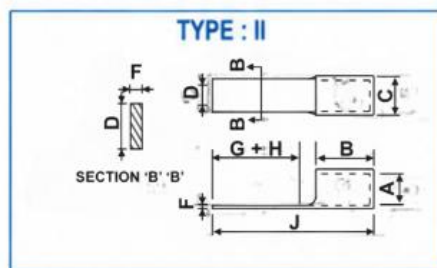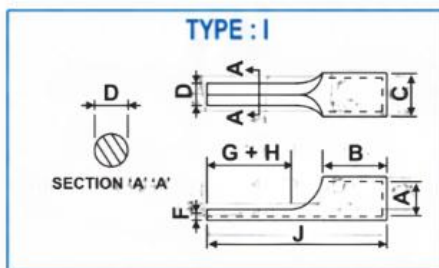




SNAP FEMALE



AREA Sq.mm	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
	D	B - 3	L - 1	L - 2	L - 3	L - 4	J		
2.8 X 0.5	1.2	3.8	6.6 / 6.0	2.3	0.5	5.7	20	8696 / A	21300000
2.8 X 0.8	1.2	3.8	6.6 / 6.0	2.3	0.5	5.7	20	8696	21300001
4.8 X 0.5	1.4	6.0	6.6 / 6.0	2.9	0.5	4.5	20	8842 / A	21300002
4.8 X 0.8	1.4	6.0	6.6 / 6.0	2.9	0.5	4.5	20	8842	21300003
5.2 X 0.5	1.6	6.5	6.6 / 6.0	2.9	0.5	4.5	20	8843 / A	21300004
5.2 X 0.8	1.6	6.5	6.6 / 6.0	2.9	0.5	4.5	20	8843	21300005
6.3 X 0.8	2.6	7.8	8.1 / 7.5	3.5	0.5	4.5	20	8841	21300006

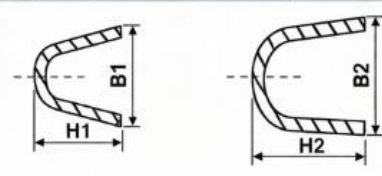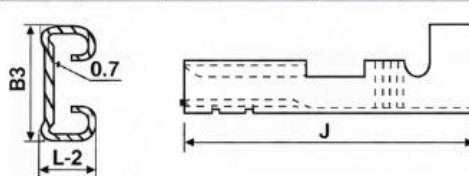


Material : As per Brass BS 5057 : 1988

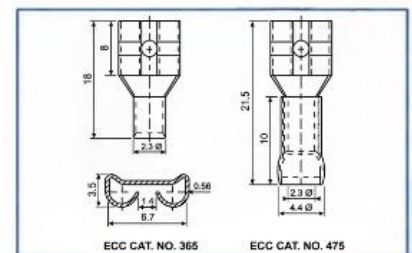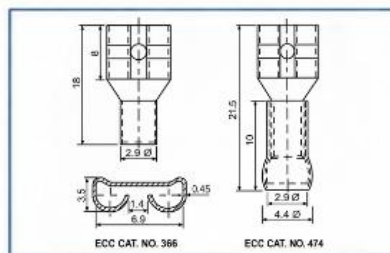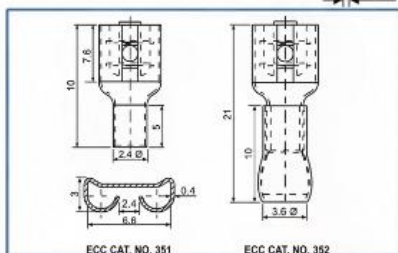

Material : Phosphor Bronze with Tin Plated


COPPER FORK TERMINAL ENDS



Material : Copper IS :1897
Finish : Tin Plated

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm								PRODUCT CODE	ECC ITEM CODE
		A	C	D	F	B	H	L-1	J		
1.5	5.1	1.6	3.2	8.0	0.75	5.0	10	17.0	21	EF-214	21400000
1.5	3.5	1.6	3.2	6.8	0.75	5.0	4.8	12.0	15	EF-249	21400001
2.5	3.5	2.3	3.9	6.5	0.75	5.0	4.3	11.8	15	EF-251	21400002
2.5	5.0	2.6	4.6	10.6	0.95	6.2	6.2	12.4	21	EF-280	21400003
4 - 6	3.1	3.5	5.5	6.0	0.95	6.0	5.5	11.5	15	EF-252	21400004
4 - 6	3.5	3.5	5.5	6.0	0.95	6.0	5.0	11.0	15	EF-253	21400005
10	6.5	4.5	6.9	16	1.15	8.0	11	19.0	27	EF-254	21400006
10	8.2	4.5	6.9	16	1.15	8.0	11	19.0	27	EF-255	21400007

COPPER FORK TERMINAL ENDS - Insulated



Colour Coating of insulation sleeve
Size 1.5, 2.5, 4-6, 10
Colour : Red, Blue, Yellow, & Black

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm										PRODUCT CODE	ECC ITEM CODE
		A	C	D	F	B	H	J	C-1	J-1	L-3		
1.5	5.1	1.6	3.2	8.0	0.75	5.0	4.8	15	5.8	10	27	EF-925	21500000
1.5	3.5	1.6	3.2	6.8	0.75	5.0	4.8	15	5.8	10	16.5	EF-926	21500001
2.5	3.5	2.3	3.9	6.5	0.75	5.0	4.3	15	6.5	10	21.8	EF-928	21500002
2.5	5.0	2.6	4.6	10.6	0.95	6.2	6.2	21	6.5	10	20	EF-929	21500003
4 - 6	3.1	3.5	5.5	6.0	0.95	6.0	5.5	15	8.0	14	27.5	EF-930	21500004
4 - 6	3.5	3.5	5.5	6.0	0.95	6.0	5.0	15	8.0	14	27	EF-931	21500005
10	6.5	4.5	6.9	16	1.15	8.0	11	27	9.0	16	35	EF-932	21500006
10	8.2	4.5	6.9	16	1.15	8.0	11	27	9.0	16	35	EF-933	21500007

Copper Connectors/ Ferrules


www.fluxindia.co.in

Copper
Connectors/
Ferrules



COPPER TUBULAR IN-LINE CONNECTORS WITH CABLE STOPPER HEAVY DUTY


CABLE SIZE mm ²	DIMENSIONS mm			PRODUCT CODE	ECC ITEM CODE
	A	C	J		
1.5	1.8	3.7	12	ELH-1.5	21600000
2.5	2.4	4.0	15	ELH-2.5	21600001
4	3.1	4.8	15	ELH-4	21600002
6	3.8	5.5	15	ELH-6	21600003
10	4.5	6.2	20	ELH-10	21600004
16	5.4	7.1	20	ELH-16	21600005
25	6.8	8.8	32	ELH-25	21600006
35	8.2	10.6	36	ELH-35	21600007
50	9.5	12.4	50	ELH-50	21600008
70	11.3	14.6	50	ELH-70	21600009
95	13.5	17.4	65	ELH-95	21600010
120	15.0	19.4	65	ELH-120	21600011
150	16.5	21.2	75	ELH-150	21600012
185	18.5	23.5	75	ELH-185	21600013
240	21.0	26.5	90	ELH-240	21600014
300	23.5	30.0	100	ELH-300	21600015
400	28.5	36.5	120	ELH-400	21600016
500	30.0	39.0	130	ELH-500	21600017
630	35.0	45.0	140	ELH-630	21600018
800	39.0	50.6	150	ELH-800	21600019
1000	43.0	56.2	170	ELH-1000	21600020

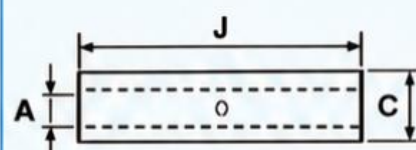

Material : Copper BS-1977
Finish : Tin Plated

COPPER TUBULAR INLINE CONNECTOR WITH CABLE STOPPER (DIN 46267)

CABLE SIZE mm ²	DIMENSIONS mm			PRODUCT CODE	ECC ITEM CODE
	A	C	J		
6	3.8	5.5	30	EDC-6	21700000
10	4.5	6.2	30	EDC-10	21700001
16	5.5	8.5	50	EDC-16	21700002
25	7.0	10.0	50	EDC-25	21700003
35	8.2	12.5	50	EDC-35	21700004
50	10.0	14.5	56	EDC-50	21700005
70	11.5	16.5	56	EDC-70	21700006
95	13.5	19.0	70	EDC-95	21700007
120	15.5	21.0	70	EDC-120	21700008
150	17.0	23.5	80	EDC-150	21700009
185	19.0	25.5	85	EDC-185	21700010
240	21.5	29.0	90	EDC-240	21700011
300	24.5	32.0	100	EDC-300	21700012
400	27.5	38.5	150	EDC-400	21700013
500	31.0	42.0	160	EDC-500	21700014
625	34.5	44.0	160	EDC-625	21700015
800	40.0	52.0	200	EDC-800	21700016
1000	44.0	58.0	200	EDC-1000	21700017



COPPER INSULATED CABLE END-SLEEVES TO (DIN 46228)

For fine and superfine standard conductors Colour-Coding and tube dimensions to DIN-46228, Part IV



Nominal Cross Section mm ²	Colour	DIMENSIONS mm					PRODUCT CODE	ECC ITEM CODE
		d1	d3	L1	L2	S1		
0.5	White	1.0	3.1	12	6	0.15	ESFI-506/A-12	21800000
		1.0	3.1	14	8	0.15	ESFI-506/A-14	21800001
		1.0	3.1	16	10	0.15	ESFI-506/A-16	21800002
0.75	Grey	1.2	3.3	12	6	0.15	ESFI-509/A-12	21800003
		1.2	3.3	14	8	0.15	ESFI-509/A-14	21800004
		1.2	3.3	16	10	0.15	ESFI-509/A-16	21800005
		1.2	3.3	18	12	0.15	ESFI-509/A-18	21800006
1	Red	1.4	3.5	12	6	0.15	ESFI-510/A-12	21800007
		1.4	3.5	14	8	0.15	ESFI-510/A-14	21800008
		1.4	3.5	16	10	0.15	ESFI-510/A-16	21800009
		1.4	3.5	18	12	0.15	ESFI-510/A-18	21800010
1.5	Black	1.7	4.0	12	6	0.15	ESFI-512/A-12	21800011
		1.7	4.0	14	8	0.15	ESFI-512/A-14	21800012
		1.7	4.0	16	10	0.15	ESFI-512/A-16	21800013
		1.7	4.0	18	12	0.15	ESFI-512/A-18	21800014
		1.7	4.0	24	18	0.15	ESFI-512/A-24	21800015
2.5	Blue	2.2	4.7	14	8	0.15	ESFI-514/A-14	21800016
		2.2	4.7	16	10	0.15	ESFI-514/A-16	21800017
		2.2	4.7	18	12	0.15	ESFI-514/A-18	21800018
		2.2	4.7	24	18	0.15	ESFI-514/A-24	21800019
4	Grey	2.8	5.4	15	8	0.20	ESFI-516/A-15	21800020
		2.8	5.4	17	10	0.20	ESFI-516/A-17	21800021
		2.8	5.4	20	12	0.20	ESFI-516/A-20	21800022
		2.8	5.4	26	18	0.20	ESFI-516/A-26	21800023
6	Yellow	3.5	6.9	18	10	0.20	ESFI-518/A-18	21800024
		3.5	6.9	20	12	0.20	ESFI-518/A-20	21800025
		3.5	6.9	26	18	0.20	ESFI-518/A-26	21800026
10	Red	4.5	8.4	22	12	0.20	ESFI-521/A-22	21800027
		4.5	8.4	28	18	0.20	ESFI-521/A-28	21800028
16	Blue	5.8	9.6	24	12	0.20	ESFI-524/A-24	21800029
		5.8	9.9	28	18	0.20	ESFI-524/A-28	21800030
25	Yellow	7.3	12.0	30	16	0.20	ESFI-525/A-30	21800031
		7.3	12.0	32	18	0.20	ESFI-525/A-32	21800032
		7.3	12.0	36	22	0.20	ESFI-525/A-36	21800033
35	Red	8.3	13.5	30	16	0.20	ESFI-526/C-30	21800034
		8.3	13.5	32	18	0.20	ESFI-526/C-32	21800035
		8.3	13.5	39	25	0.20	ESFI-526/C-39	21800036
50	Red	10.3	16.0	36	20	0.30	ESFI-527/A-36	21800037
		10.3	16.0	40	25	0.30	ESFI-527/A-40	21800038


www.fluxindia.co.in

Aluminium Lugs



COMPRESSION TYPE ALUMINIUM LUG (EXR)


For XLPE Aluminium Round Standard Conductor



Material : Aluminum
Finish Natural

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
16	8.4	5.4	8.3	11.0	14	9.0	9.0	37.0	EXR - 16/8	41900000
25	8.4	7.2	9.6	14.0	41	12.0	9.0	69.0	EXR - 25/8	41900001
35	10.5	8.3	11.1	16.0	50	11.0	11.0	79.0	EXR - 35/10	41900002
50	10.5	10.1	13.5	19.5	49	13.0	11.0	81.0	EXR - 50/10	41900003
70	13.0	10.2	14.5	20.5	62	13.0	13.0	98.0	EXR - 70/12	41900004
95	13.0	12.0	16.9	23.5	73	14.0	14.0	109	EXR - 95/12	41900005
120	13.0	13.7	19.0	26.5	73	15.0	15.0	114	EXR - 120/12	41900006
150	13.0	15.1	21.1	29.5	83	17.0	17.0	128	EXR - 150/12	41900007
185	17.0	16.6	23.9	33.0	83	18.0	18.0	131	EXR - 185/16	41900008
225	17.0	18.6	26.1	36.0	86	20.0	20.0	140	EXR - 225/16	41900009
240	17.0	19.3	27.2	37.5	86	22.0	22.0	144	EXR - 240/16	41900010
300	17.0	21.8	30.2	42.0	89	27.0	27.0	157	EXR - 300/16	41900011
400	17.0	25.0	34.8	48.0	113	30.0	30.0	186	EXR - 400/16	41900012
500	17.0	28.2	39.1	54.0	125	32.0	32.0	204	EXR - 500/16	41900013
630	17.0	31.7	44.4	61.0	140	34.0	34.0	224	EXR - 630/16	41900014
800	20.3	35.7	49.5	68.0	147	39.0	39.0	250	EXR - 800/20	41900015
1000	20.3	41.0	56.0	81.0	160	45.0	45.0	280	EXR - 1000/20	41900016

COMPRESSION TYPE ALUMINIUM LONG PLAM DOUBLE STUD TUBULAR TERMINAL ENDS

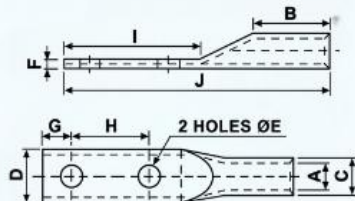


Material : Aluminum
Finish Natural

CABLE SIZE mm ²	DIMENSIONS mm										PRODUCT CODE	ECC ITEM CODE
	A	C	D	F	E	B	G	H	I	J		
25	7.0	9.7	13.7	2.7	8.2	21	11	20.0	-	70	EALPDH - 25	42000001
35	8.0	10.8	15.4	2.8	8.2	21	11	20.0	-	70	EALPDH - 35	42000001
50	9.3	13.0	18.3	3.5	10.5	30	13	40.0	65	115	EALPDH - 50	42000002
70	11.6	16.0	21.8	4.5	10.5	30	13	40.0	65	115	EALPDH - 70	42000003
95	13.5	17.4	24.8	4.2	10.5	30	13	40.0	65	115	EALPDH - 95	42000004
120	15.0	19.6	28.0	4.8	13.0	50	20	40.0	81	145	EALPDH - 120	42000005
150	16.7	21.5	30.8	5.0	13.0	50	20	40.0	90	156	EALPDH - 150	42000006
185	18.5	24.0	34.5	5.5	13.0	50	20	40.0	90	156	EALPDH - 185	42000007
240	22.0	28.0	40.0	6.5	13.0	50	20	40.0	90	156	EALPDH - 240	42000008
300	23.8	31.0	45.0	6.8	13.0	50	20	40.0	90	156	EALPDH - 300	42000009


COMPRESSION TYPE ALUMINIUM TUBULAR TERMINAL ENDS (IS 8309-1993)

CABLE SIZE mm ²	STUD HOLE (E)	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	H	G	J		
10	4.2	4.4	7.2	9.7	7	9	8	28	EAS - 10/4	42100000
	6.4	4.4	7.2	9.7	9	9	8	30	EAS - 10/6	42100001
	8.2	4.4	7.2	12.0	9	9	8	30	EAS - 10/8	42100002
16	6.4	5.4	8.3	11.4	13	11	9	37	EAS - 16/6	42100003
	8.2	5.4	8.3	11.7	13	11	9	37	EAS - 16/8	42100004
	10.2	5.4	8.3	14.0	13	11	9	38	EAS - 16/10	42100005
25	6.4	7.0	9.7	13.7	16	11	10	44	EAS - 25/6	42100006
	8.2	7.0	9.7	13.7	16	11	10	44	EAS - 25/8	42100007
	10.2	7.0	9.7	14.0	16	11	10	44	EAS - 25/10	42100008
35	6.4	8.0	10.8	15.4	18	11	11	46	EAS - 35/6	42100009
	8.2	8.0	10.8	15.4	18	11	11	46	EAS - 35/8	42100010
	10.2	8.0	10.8	15.7	18	11	11	46	EAS - 35/10	42100011
50	8.2	9.3	13.0	18.3	22	13	11	54	EAS - 50/8	42100012
	10.2	9.3	13.0	18.3	22	13	11	54	EAS - 50/10	42100013
	12.7	9.3	13.0	18.5	22	13	12	54	EAS - 50/12	42100014
70	8.2	11.6	16.0	21.8	26	13	13	60	EAS - 70/8	42100015
	10.2	11.6	16.0	21.8	26	13	13	60	EAS - 70/10	42100016
	12.7	11.6	16.0	21.8	26	13	13	60	EAS - 70/12	42100017
95	10.2	13.5	17.4	25.3	28	14	14	64	EAS - 95/10	42100018
	12.7	13.5	17.4	25.3	28	14	14	64	EAS - 95/12	42100019
	16.2	13.5	17.4	25.3	28	15	15	64	EAS - 95/16	42100020
120	10.2	15	19.6	28.0	32	15	15	73	EAS - 120/10	42100021
	12.7	15	19.6	28.0	32	15	15	73	EAS - 120/12	42100022
	16.2	15	19.6	28.0	32	15	15	73	EAS - 120/16	42100023
150	10.2	16.7	21.5	30.8	34	17	17	79	EAS - 150/10	42100024
	12.7	16.7	21.5	30.8	34	17	17	79	EAS - 150/12	42100025
	16.2	16.7	21.5	30.8	34	17	17	79	EAS - 150/16	42100026
185	10.2	18.5	24.0	34.5	36	18	18	84	EAS - 185/10	42100027
	12.7	18.5	24.0	34.5	36	18	18	84	EAS - 185/12	42100028
	16.2	18.5	24.0	34.5	36	18	18	84	EAS - 185/16	42100029
240	12.7	22.0	28.0	40.0	44	22	22	102	EAS - 240/12	42100030
	16.2	22.0	28.0	40.0	44	22	22	102	EAS - 240/16	42100031
300	12.7	23.8	31.0	45.0	47	27	27	115	EAS - 300/16	42100032
	20.3	23.8	31.0	45.0	47	27	27	115	EAS - 300/20	42100033
400	20.3	28.0	36.0	50.8	56	31	30	130	EAS - 400/20	42100034
500	20.3	29.9	41.0	57.8	60	33	32	140	EAS - 500/20	42100035
630	20.3	34.9	46.0	65.8	69	35	34	154	EAS - 630/20	42100036
800	BL	39.0	51.0	73.3	77	39	39	180	EAS - 800/BL	42100037
1000	BL	43.0	57.0	81.5	100	45	45	220	EAS - 1000/BL	42100038

NOTE : Tolerance for A & C Dimension = ± 0.2 mm & F dimension = ± 0.5 mm



Material : Aluminium IS : 5082
Copper & Tin Plating available on request

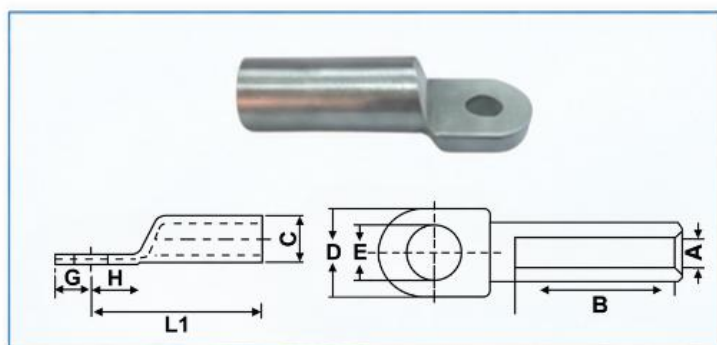


ALUMINIUM CABLE LUGS AS PER DIN 46329

CABLE SIZE mm ²	STUD HOLE (E) mm	DIMENSIONS mm							PRODUCT CODE	ECC ITEM CODE
		A	C	D	B	G	H	L1		
25	8.4	6.8	12	25	30	12.5	15	50	EDA-25/8	42200000
	10.5	6.8	12	25	30	12.5	15	50	EDA-25/10	42200001
	13	6.8	12	25	30	12.5	15	50	EDA-25/12	42200002
35	8.4	8.0	14	25	42	12.5	15.5	62	EDA-35/8	42200003
	10.5	8.0	14	25	42	12.5	15.5	62	EDA-35/10	42200004
	13	8.0	14	25	42	12.5	15.5	62	EDA-35/12	42200005
50	8.4	9.8	16	25	42	12.5	15.5	62	EDA-50/8	42200006
	10.5	9.8	16	25	42	12.5	15.5	62	EDA-50/10	42200007
	13	9.8	16	25	42	12.5	15.5	62	EDA-50/12	42200008
70	8.4	11.2	18.5	25	52	12.5	15.5	72	EDA-70/8	42200009
	10.5	11.2	18.5	25	52	12.5	15.5	72	EDA-70/10	42200010
	13	11.2	18.5	25	52	12.5	15.5	72	EDA-70/12	42200011
95	10.5	13.2	22	25	56	12.5	15.5	75	EDA-95/10	42200012
	13	13.2	22	25	56	12.5	15.5	75	EDA-95/12	42200013
120	10.5	14.7	23	30	56	15	20	80	EDA-120/10	42200014
	13	14.7	23	30	56	15	20	80	EDA-120/12	42200015
	17	14.7	23	30	56	15	20	80	EDA-120/16	42200016
150	10.5	16.3	25	30	60	15	20	90	EDA-150/10	42200017
	13	16.3	25	30	60	15	20	90	EDA-150/12	42200018
	17	16.3	25	30	60	15	20	90	EDA-150/16	42200019
185	10.5	18.3	28.5	30	60	15	20	91	EDA-185/10	42200020
	13	18.3	28.5	30	60	15	20	91	EDA-185/12	42200021
	17	18.3	28.5	30	60	15	20	91	EDA-185/16	42200022
240	13	21	32	38	70	19	24	103	EDA-240/12	42200023
	17	21	32	38	70	19	24	103	EDA-240/16	42200024
	21	21	32	38	70	19	24	103	EDA-240/20	42200025
300	13	23.3	34	38	70	19	24	103	EDA-300/12	42200026
	17	23.3	34	38	70	19	24	103	EDA-300/16	42200027
	21	23.3	34	38	70	19	24	103	EDA-300/20	42200028
400	13	26	38.5	38	73	19	24	116	EDA-400/12	42200029
	17	26	38.5	38	73	19	24	116	EDA-400/16	42200030
	21	26	38.5	38	73	19	24	116	EDA-400/20	42200031
500	13	29	44	44	79	22	24	122	EDA-500/12	42200032
	17	29	44	44	79	22	24	122	EDA-500/16	42200033
	21	29	44	44	79	22	24	122	EDA-500/20	42200034

ALUMINIUM LUGS

AWG SERIES Aluminium Lugs EATL Series (Tin Plated Aluminium Lug)


CONDUCTOR SIZE AWG	STUD HOLE Ø mm	DIMENSIONS mm							CRIMPING LINES	PRODUCT CODE	ECC ITEM CODE
		A	C	B	D	G	H	J			
6	8.4	5.1	8.8	19.1	14.2	11.1	11.1	57.9	2 lines x 3mm	EATL-6-5/16	237000001
	10.2	5.1	8.8	19.1	14.2	11.1	11.1	57.9	2x3	EATL-6-3/8	237000001
4	8.4	6.7	11.9	23.8	15.7	11.5	12.9	58.4	3x3	EATL-4-5/16	237000002
	10.2	6.7	11.9	23.8	15.7	11.5	12.9	58.4	3x3	EATL-4-3/8	237000003
2	8.4	7.8	13.5	23.4	19.1	11.1	15.1	66.5	3x3	EATL-2-5/16	237000004
	10.2	7.8	13.5	23.4	19.1	11.1	15.1	66.5	3x3	EATL-2-3/8	237000005
	13.2	7.8	13.5	23.4	19.1	11.1	15.1	66.5	3x3	EATL-2-1/2	237000006
1/0 AWG	8.4	10.5	16.3	30.0	22.4	16.0	17.3	79.2	3x3	EATL-1/0-5/16	237000007
	10.2	10.5	16.3	30.0	22.4	16.0	17.3	79.2	3x3	EATL-1/0-3/8	237000008
	13.2	10.5	16.3	30.0	22.4	16.0	17.3	79.2	3x3	EATL-1/0-1/2	237000009
2/0 AWG	8.4	11.2	17.5	33.0	24.2	16.0	15.8	81.0	3x3	EATL-2/0-5/16	237000010
	10.2	11.2	17.5	33.0	24.2	16.0	15.8	81.0	3x3	EATL-2/0-3/8	237000011
	13.2	11.2	17.5	33.0	24.2	16.0	15.8	81.0	3x3	EATL-2/0-1/2	237000012
3/0 AWG	10.2	12.3	19.3	38.1	26.9	16.0	16.5	87.4	3x3	EATL-3/0-3/8	237000013
	13.2	12.3	19.3	38.1	26.9	16.0	16.5	87.4	3x3	EATL-3/0-1/2	237000014
4/0 AWG	10.2	13.7	22.2	36.6	30.2	16.1	18.0	90.4	3x3	EATL-4/0-3/8	237000015
	13.2	13.7	22.2	36.6	30.2	16.1	18.0	90.4	3x3	EATL-4/0-1/2	237000016
250 MCM	10.2	15.1	23.0	39.6	31.4	16.0	17.2	91.9	3x3	EATL-250/0-3/8	237000017
	13.2	15.1	23.0	39.6	31.4	16.0	17.2	91.9	3x3	EATL-250/0-1/2	237000018
300 MCM	10.2	16.5	25.7	55.6	34.5	16.0	17.2	101.6	3x3	EATL-300-3/8	237000019
	13.2	16.5	25.7	55.6	34.5	16.0	17.2	101.6	3x3	EATL-300-1/2	237000020
350 MCM	10.2	18.3	28.1	55.6	37.8	16.0	17.4	108	3x3	EATL-350-3/8	237000021
	13.2	18.3	28.1	55.6	37.8	16.0	17.4	108	3x3	EATL-350-1/2	237000022
500 MCM	13.2	21.4	33.5	74.6	45.0	16.0	24.6	138.2	7x3	EATL-500-1/2	237000023
	16.8	21.4	33.5	74.6	45.0	16.0	24.6	138.2	7x3	EATL-500-5/8	237000024
600 MCM	16.8	23.4	38.5	76.2	50.0	16.0	22.8	141.0	7x3	EATL-600-5/8	237000025
	20.0	23.4	38.5	76.2	50.0	16.0	22.8	141.0	7x3	EATL-600-3/4	237000026
750 MCM	16.8	26.2	38.1	84.3	52.0	22.5	25.1	162.1	7x3	EATL-750-5/8	237000027
	20.0	26.2	38.1	84.3	52.0	22.5	25.1	162.1	7x3	EATL-750-3/4	237000028



Material:
Aluminum Tin Plated

AWG SERIES Aluminium Lugs EATL2 Series (Tin Plated Double Hole Aluminium Lug)


CONDUCTOR SIZE AWG	STUD HOLE Ø mm	DIMENSIONS mm								CRIMPING LINES	PRODUCT CODE	ECC ITEM CODE
		L	A	C	B	D	G	H	J			
1/0 AWG	8.4	44.5	10.5	16.3	38.1	22.4	16.0	22.1	134.1	3 lines x 5mm	EATL2-1/0-3/8	238000001
	10.2	44.5	10.5	16.3	38.1	22.4	16.0	22.1	134.1	3x3	EATL2-1/0-5/16	238000002
	13.2	44.5	10.5	16.3	38.1	22.4	16.0	22.1	134.1	3x3	EATL2-1/0-1/2	238000003
2/0 AWG	8.4	44.5	11.2	17.5	38.1	23.9	16.0	22.1	139.7	3x3	EATL2-2/0-3/8	238000004
	10.2	44.5	11.2	17.5	38.1	23.9	16.0	22.1	139.7	3x3	EATL2-2/0-5/16	238000005
	13.2	44.5	11.2	17.5	38.1	26.0	16.0	22.1	139.7	3x3	EATL2-2/0-1/2	238000006
3/0 AWG	8.4	44.5	12.3	19.3	38.1	26.9	16.0	22.1	139.7	3x3	EATL2-3/0-3/8	238000007
	10.2	44.5	12.3	19.3	38.1	26.9	16.0	22.1	139.7	3x3	EATL2-3/0-5/16	238000008
	13.2	44.5	12.3	19.3	38.1	26.9	16.0	22.1	139.7	3x3	EATL2-3/0-1/2	238000009



Material: Aluminum
Tin Plated

AWG SERIES Aluminium Lugs

EATL2 Series (Tin Plated Double Hole Aluminium Lug)

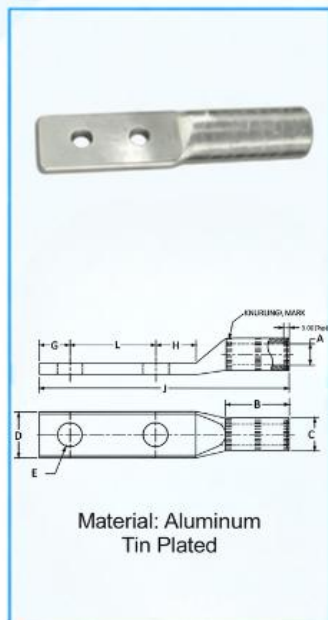

CONDUCTOR SIZE AWG	STUD HOLE Ø mm	DIMENSIONS mm								CRIMPING LINES	PRODUCT CODE	ECC ITEM CODE
		L	A	C	B	D	G	H	J			
4/0 AWG	13.2	44.5	13.7	22.2	49.2	30.2	16.0	25.4	152.4	3x3	EATL2-4/0-1/2	23800009
	16.8	44.5	13.7	22.2	39.2	30.2	16.0	25.4	152.4	3x3	EATL2-4/0-3/8	23800010
250 MCM	13.2	44.5	15.1	23.0	49.2	31.8	16.0	25.4	152.4	3x3	EATL2-250-1/2	23800012
	16.8	44.5	15.1	23.0	49.2	31.8	16.0	25.4	152.4	3x3	EATL2-250-3/8	23800013
300 MCM	13.2	44.5	16.5	25.7	57.2	34.5	16.0	29.9	166.6	3x3	EATL2-300-1/2	23800014
	17.0	44.5	16.5	25.7	57.2	34.5	16.0	29.9	166.6	3x3	EATL2-300-3/8	23800015
350 MCM	13.2	44.5	18.3	28.1	57.2	38.1	16.0	29.9	166.6	3x3	EATL2-350-1/2	23800016
	16.8	44.5	18.3	28.1	57.2	38.1	16.0	29.9	166.6	3x3	EATL2-350-3/8	23800017
400 MCM	13.2	44.5	19.4	30.0	63.5	41.2	16.0	29.9	174.8	7x3	EATL2-400-1/2	23800018
	16.8	44.5	19.4	30.0	63.5	41.2	16.0	29.9	174.8	7x3	EATL2-400-3/8	23800019
500 MCM	13.2	44.5	21.4	33.5	76.2	45.0	16.0	29.9	185.7	7x3	EATL2-500-1/2	23800020
	16.8	44.5	21.4	33.5	76.2	45.0	16.0	29.9	185.7	7x3	EATL2-500-3/8	23800021
600 MCM	13.2	44.5	23.4	36.5	76.2	50.0	16.0	29.9	196.9	7x3	EATL2-600-1/2	23800022
	16.8	44.5	23.4	36.5	76.2	50.0	16.0	29.9	196.9	7x3	EATL2-600-3/8	23800023
750 MCM	13.2	44.5	26.2	38.1	85.9	52.0	22.5	25.0	209.6	7x3	EATL2-750-1/2	23800024
	16.8	44.5	26.2	38.1	85.9	52.0	22.5	25.0	209.6	7x3	EATL2-750-3/8	23800025
1000 MCM	13.2	44.5	30.3	46.8	117.4	62.0	22.5	25.0	245.8	7x3	EATL2-1000-1/2	23800026
	16.8	44.5	30.3	46.8	117.4	62.0	22.5	25.0	245.8	7x3	EATL2-1000-3/8	23800027

AWG SERIES Aluminium Ferrule


EACL Series (Tin Plated Aluminium Ferrule)



AWG CONDUCTOR	DIMENSIONS mm			Crimping lines on barrel	PRODUCT CODE	ECC ITEM CODE
	A	C	J			
6 STR	5.1	8.8	41.1	5 lines x 3mm	EASL-6	23900000
4 STR	6.7	11.9	53.8	5x3	EASL-4	23900001
2 STR	7.8	13.5	50.5	5x3	EASL-2	23900002
1/0 AWG	10.5	16.3	53.8	5x3	EASL-1/0	23900003
2/0 AWG	11.2	17.5	58.7	5x3	EASL-2/0	23900004
3/0 AWG	12.3	19.3	66.5	5x3	EASL-3/0	23900005
4/0 AWG	13.7	22.2	69.9	5x3	EASL-4/0	23900006
250 MCM	15.1	23.0	74.7	5x3	EASL-250	23900007
300 MCM	16.5	25.7	79.2	5x3	EASL-300	23900008
350 MCM	18.3	28.1	85.8	5x3	EASL-350	23900009
500 MCM	21.4	33.5	98.6	9x3	EASL-500	23900010
750 MCM	26.2	38.1	118.8	9x3	EASL-750	23900011

Aluminium Connectors/ Ferrules



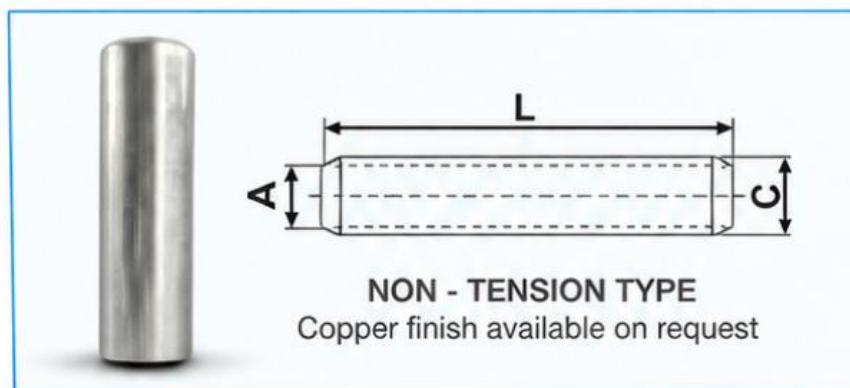

ALUMINIUM FERRULE (XRM)

For XLPE Aluminium Round Standard Conductor

CABLE SIZE mm ²	DIMENSIONS mm			PRODUCT CODE	ECC ITEM CODE
	A	C	J		
16	5.4	7.4	35	EXRC-16	42300000
25	7.2	9.6	37	EXRC-25	42300001
35	8.3	11.1	42	EXRC-35	42300002
50	10.1	13.5	47	EXRC-50	42300003
70	10.2	14.5	57	EXRC-70	42300004
95	12	16.9	62	EXRC-95	42300005
120	13.7	19	68	EXRC-120	42300006
150	15.1	21.1	73	EXRC-150	42300007
185	16.6	23.9	78	EXRC-185	42300008
225	18.6	26.1	88	EXRC-225	42300009
240	19.3	27.2	93	EXRC-240	42300010
300	21.8	30.2	104	EXRC-300	42300011
400	25.0	34.8	119	EXRC-400	42300012
500	28.2	39.1	129	EXRC-500	42300013
630	31.7	44.4	144	EXRC-630	42300014
800	35.7	49.5	164	EXRC-800	42300015
1000	41	56	214	EXRC-1000	42300016

Bimetallic Lugs & Connectors



Bi-Metallic CABLE LUGS

Suitable for Aluminium Conductors as per DIN 46329

Bimetallic lugs are made from high quality Aluminium and Copper with Barrier joined together by friction welding process. Aluminium barrel is filled with non oxide inhibiting compound and sealed with cap. Palm is with solid ETP copper.

Technical Data

Aluminium - 99.5% Pure

Copper - ETP grade

Joining Method - Friction Welding

Operating Temperature - 40° to 100° C


Al conductivity - 60% IACS

Cu.Conductivity - 97% IACS


Application

Industrial application for Transition joints High/Low Voltage.



Switch gears and grounding systems.



up to 400



500 to 1000

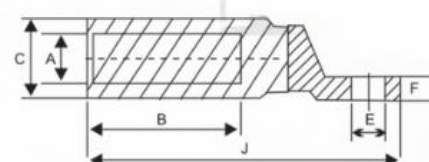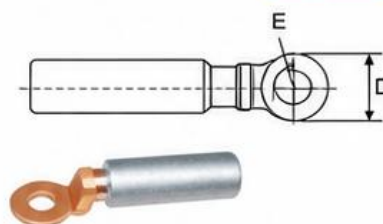

Cable Size mm²	Stud Hole (E)	A	C	D	B	J	F	Part No.	ECC ITEM CODE
16	8.5	6	12	21	43	85	4	EBL16/8	62400000
	10.5							EBL16/10	62400001
25	8.5	6.8	16	21	43	85	4	EBL25/8	62400002
	10.5							EBL25/10	62400003
	13							EBL25/12	62400004
35	8.5	8	16	21	43	85	4	EBL35/8	62400005
	10.5							EBL35/10	62400006
	13							EBL35/12	62400007
50	8.5	9.8	20	25	43	90	5	EBL50/8	62400008
	10.5							EBL50/10	62400009
	13							EBL50/12	62400010
70	10.5	11.2	20	25	43	90	5	EBL70/10	62400011
	13							EBL70/12	62400012
95	10.5	13.2	22	25	56	100	5	EBL95/10	62400013
	13							EBL95/12	62400014
	17							EBL95/16	62400015
120	13	14.7	22	25	56	100	5	EBL120/12	62400016
	17							EBL120/16	62400017
150	13	16.3	25	30	60	115	6.0	EBL130/12	62400018
	17							EBL150/16	62400019
	21							EBL150/20	62400020
185	10.5	18.3	30	30	60	115	6.0	EBL185/10	62400021
	13							EBL185/12	62400022
	17							EBL185/16	62400023
	21							EBL185/20	62400024
240	13	21	32	35	70	130	7.0	EBL240/12	62400025
	17							EBL240/16	62400026
	21							EBL240/20	62400027
300	13	23.3	34	35	73	146	7.0	EBL300/12	62400028
	17							EBL300/16	62400029
	21							EBL300/20	62400030
400	17	26	38.5	35	73	146	7.0	EBL400/16	62400031
500	17	29.1	47	60x60	94	200	10	EBL500/16	62400032
630	17	32.5	47	60x60	94	200	10	EBL630/16	62400033
800	-	37.5	58	80x80	120	260	10	EBL800/BL	62400034
1000	-	42	58	80x80	120	260	10	EBL1000/BL	62400035

Bi-Metallic CABLE CONNECTORS

Bi-metal in line connectors are friction welded from the ETP grade Copper and Aluminium with solid barrier. Aluminium barrel is filled with jointing compound and end is sealed with cap.

Technical Data

Aluminium - 99.5% Pure

Copper - 99.5% Pure

Joining Method - Friction Welding

Operating Temperature - 40° to 100°c


Application

Industrial application for Transition joints
High Voltage. Switch gears and grounding systems.

Conductivity


Aluminium - 60% IACS

Copper - 97% IACS




AL Cable Size mm ²	Cu Cable Size	A ₁	C ₁	A ₂	C ₂	L ₁	L ₂	L	Part No.	ECC ITEM CODE
		Aluminium		Copper		Al	Cu			
16	10	6	12	4.5	6.2	32	15	60	EBC16/10	62500000
25	10	7	12	4.5	6.2	35	15	65	EBC25/10	62500001
	16	7	12	6	8.5	35	18	65	EBC25/16	62500002
35	16	8	14	6	8.5	40	18	70	EBC35/16	62500003
	25	8	14	7	10	40	20	70	EBC35/25	62500004
50	25	9	15	7	10	45	20	75	EBC50/25	62500005
	35	9	15	8.2	12.5	45	20	75	EBC50/35	62500006
70	35	11.2	20	8.2	12.5	45	20	78	EBC70/35	62500007
	50	11.2	20	10	14.5	45	21	80	EBC70/50	62500008
95	50	13.2	22	10	14.5	47	21	82	EBC95/50	62500009
	70	13.2	22	11.5	15	47	23	85	EBC95/70	62500010
120	50	14.7	23	10	14.5	47	21	82	EBC120/50	62500011
	70	14.7	23	11.5	15	47	23	85	EBC120/70	62500012
	95	14.7	23	14	17.4	47	27	90	EBC120/95	62500013
150	70	16.3	25	11.5	15	50	23	90	EBC150/70	62500014
	95	16.3	25	14	17.4	50	27	92	EBC150/95	62500015
	120	16.3	25	15.0	19.4	50	28	92	EBC150/120	62500016
185	95	18.3	30	14	17.4	55	27	98	EBC185/95	62500017
	120	18.3	30	15.0	19.4	55	28	98	EBC185/120	62500018
	150	18.3	30	16.5	21.2	55	30	100	EBC185/150	62500019
240	120	21	32	15	19.4	60	28	105	EBC240/120	62500020
	150	21	32	16.5	21.2	60	30	108	EBC240/150	62500021
	185	21	32	18.5	23.5	60	35	113	EBC240/185	62500022
300	150	23.3	34	16.5	21.2	60	30	108	EBC300/150	62500023
	185	23.3	34	18.5	23.5	60	35	113	EBC300/185	62500024
	240	23.3	34	21.5	27.5	60	40	115	EBC300/240	62500025
400	240	26	38.5	21.5	27.5	62	40	123	EBC400/240	62500026
	300	26	38.5	24	30.5	62	45	129	EBC400/300	62500027
500	300	30	45	24	30.5	65	45	130	EBC500/300	62500028
	400	30	45	27.5	38.5	65	50	132	EBC500/400	62500029
630	500	35	50	31	42	70	55	142	EBC630/500	62500030

Bi-Metallic LUGS WITH COPPER FORG PALM

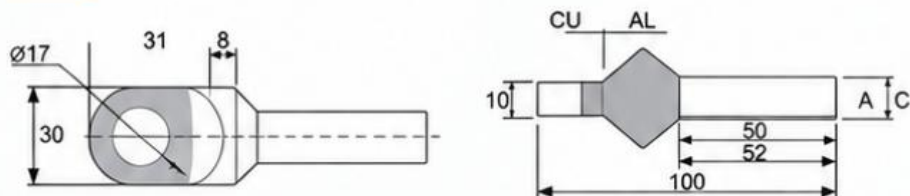

Cable Size mm ²	Stud Hole Dia E	A	C	B	L	Part No.	ECC ITEM CODE
35	17	8	14	50	100	EBCP35	62600000
50	17	10	16	50	100	EBCP50	62600001
70	17	12	18	50	100	EBCP70	62600002
95	17	13	21	50	100	EBCP95	62600003
120	17	15	23	50	100	EBCP120	62600004
150	17	16	25	50	100	EBCP150	62600005
185	17	18	28	50	100	EBCP185	62600006
240	17	20	31	50	100	EBCP240	62600007
300	17	22	35	50	100	EBCP300	62600008
400	17	25	39	50	100	EBCP400	62600009



Reverse Bi-Metallic LUGS WITH ALUMINIUM PALM

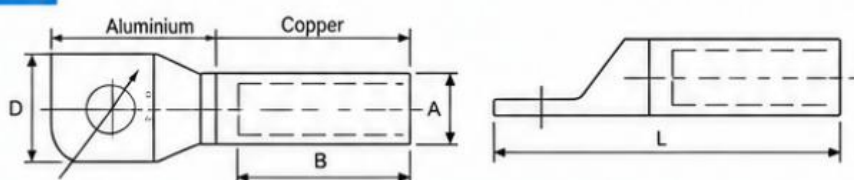

Cable Size mm ²	Cable Size Copper		Diameter D	B	L	Part No.	ECC ITEM CODE
	A	C					
16	6	8.5	16	27	70	ERBL16	24000000
25	7	10	16.5	27	70	ERBL25	24000001
35	8.2	12.5	20.5	30	70	ERBL35	24000002
50	10	14.5	22.5	40	95	ERBL50	24000003
70	11.5	15	25.5	40	95	ERBL70	24000004
95	14	17.5	30.5	40	95	ERBL95	24000005
120	15	19.4	32	50	105	ERBL120	24000006
150	16.5	21.2	35	55	120	ERBL150	24000007
185	18.5	23.5	40	60	130	ERBL185	24000008
240	21.5	27.5	45	65	140	ERBL240	24000009
300	24	30.5	48	65	140	ERBL300	24000010
400	27.5	38.5	54	70	150	ERBL400	24000011
500	31	42	61	75	160	ERBL500	24000012
630	34.5	44	65.8	80	175	ERBL630	24000013

Bi-Metallic COPPER PIN CONNECTORS FOR ALUMINIUM CABLES


Bi-Metallic PIN connectors with Aluminium and copper friction welded with highest pure quality of Aluminium & copper materials. Aluminium barrel is filled with jointing compound and end is sealed with cap.

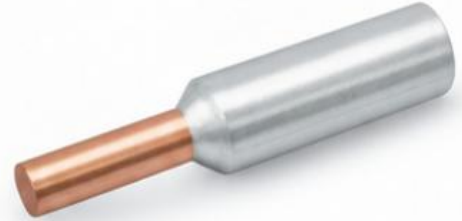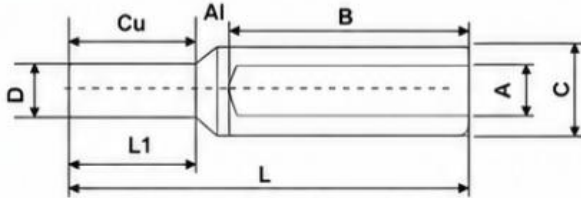

Cable Size mm ²	A	C	D	B	L ₁	L	Part No.	ECC ITEM CODE
16	6	12	6	30	20	58	EBPC16	62700000
25	6.8	16	6	30	20	58	EBPC25	62700001
35	8	16	7	40	22	71	EBPC35	62700002
50	9.8	20	8	40	25	74	EBPC50	62700003
70	11.5	20	10	50	30	87	EBPC70	62700004
95	13.5	22	12	50	33	91	EBPC95	62700005
120	15	23	12	52	38	98	EBPC120	62700006
150	16.3	25	12	62	38	108	EBPC150	62700007
185	18.5	30	14	64	44	116	EBPC185	62700008
240	21	32	16	76	44	128	EBPC240	62700009
300	23.3	34	18	76	46	131	EBPC300	62700010
400	26	38.5	18	88	56	153	EBPC400	62700011

Bi-Metallic ALUMINIUM PIN CONNECTORS FOR COPPER CABLES

Bi-Metallic PIN connectors with Aluminium and copper friction welded with highest pure quality of Aluminium & copper materials.

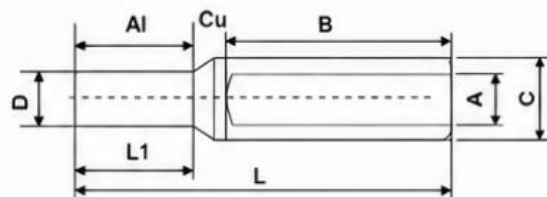

Cable Size mm ²	A	C	D	B	L ₁	L	Part No.	ECC ITEM CODE
16	5.5	8.5	5	13	15	45	EBPA16	64100000
25	7	10	6	13	15	45	EBPA25	64100001
35	8.2	12.5	6.5	16	22	55	EBPA35	64100002
50	10	14.5	6.5	16	22	50	EBPA50	64100003
70	11.5	16.5	10.5	18	25	60	EBPA70	64100004
95	13.5	19	11	20	30	70	EBPA95	64100005
120	15.5	21	11	22	33	75	EBPA120	64100006
150	17	23.5	11	26	38	75	EBPA150	64100007
185	19	25.5	11	32	38	75	EBPA185	64100008
240	21.5	29	15	38	45	80	EBPA240	64100009
300	24.5	32	15	42	45	80	EBPA300	64100010

Mechanical/ Screw Connectors & Lugs



ECC MECHANICAL CONNECTORS & LUGS

Features & Benefits

- Wide application range
- Compact design
- Can be used with different type of conductors (Sector shaped, Stranded, Compact and solid) and materials like Aluminium, Aluminium alloy and Copper
- Torque-controlled shear-head bolts guarantee a good electrical contact
- Easy installation with standard socket spanner
- Pre-engineered design for perfect fit in medium voltage cable accessories up to 42 kV
- Tested according to IEC 61238-1 class A

General Description

- Mechanical connectors, lugs and repair sleeves are designed for use in low, medium and High voltage applications.
- Only four sizes cover conductor sizes from 25 mm² to 630 mm²
- All products consist of a tin-plated body, shear-head bolts, inserts for small conductor sizes and factory applied grease for protection against moisture and oxidation.



FEATURES & BENEFITS	FUNCTIONS OF MECHANICAL LUGS AND CONNECTORS
Wide application range only	Four sizes cover conductor cross-sections from 25 mm ² to 630 mm ² and can be used for almost every type of conductor and material
Bodies made of a high-tensile, tin-plated aluminium alloy Bolts made of special aluminium alloy	Good contact properties Connection between copper and aluminium conductors is possible
Compact design	Requires little installation space, particularly for large sizes
Conductor connection hole with crosswise and lengthwise grooves	Good electrical performance Conductor oxide film is disrupted
Centered hole and inserts	Conductors of every size are centered Height of the step between the conductor insulation and connector surface is reduced Same cut-back Length even when centering insert is used Wires are not distorted when bolts are tightened
Shear bolts with predetermined shear torque, hexagon head and specially shaped contact ring	No torque wrench necessary Head shears off when a specific level of torque is applied High tensile strength
Lubricated bolts	Reduces friction Converts tightening torque into contact force for maximum effect
No elongation during installation	Easier to design relevant accessories

MECHANICAL CONNECTORS / LUGS DESIGN



CONNECTOR / LUG BODY

- Connector and lug bodies are made of a high-tensile, tin-plated aluminium alloy.
- The internal surfaces of the conductor holes are grooved.
- Connectors are chamfered at the edges and available with or without oil barrier (as blocked and unblocked types) depending on the application requirements.
- Lugs are suitable for outdoor and indoor applications and are available with different palm hole sizes.

SHEAR HEAD BOLTS

- Made of a special aluminium alloy, these contact bolts are having single or double shear-head points with hexagonal heads.
- The bolts are treated with a highly lubricating agent and equipped with a special contact ring.
- Contact bolts are irremovable once their heads have been sheared off.

INSERTS

- Lugs and connectors are provided with inserts for smaller conductors.
- These inserts have lengthwise serrations and a positioning guide.

TYPES OF ECC MECHANICAL CONNECTORS & LUGS

- **EMC**- ECC Mechanical Connectors – Block
- **EMCN**- ECC Mechanical Connectors – No Block
- **EML**- ECC Mechanical Lugs
- **EMLC**- ECC Mechanical Lugs Center Palm
- **LTMC**- Low Tension Mechanical Connectors
- **ERBC**- ECC Reducer type Bolted Connector
- **ERC**- ECC Repair Connector
- **EHVC**- ECC High Voltage Mechanical Connector
- **EGMC**- ECC Grounding Mechanical Connector
- **EGML**- ECC Grounding Mechanical Lug
- **EBMC**- ECC Branching Mechanical Connector
- **ESBC**- ECC Splitter Bolted Connectors

SPECIAL FEATURES OF MECHANICAL CONNECTORS


- Chamfered edges Suitable for up to 42 kV and adaptable to existing joint designs Available with and without oil barrier, oil stop when used in transition joints

SPECIAL FEATURES OF MECHANICAL LUGS

- Long shank, Extra-long for moisture barrier Lengthwise seal for indoor and outdoor applications


ECC MECHANICAL CONNECTORS – EMC & EMCN

- EMC, Mechanical connectors, Mechanical Lugs and repair sleeves are designed for use in low and medium voltage applications.
- Four sizes of our EMC connectors cover conductors' sizes ranging from 25 mm² to 630 mm². Our connectors consist of a tin-plated body, shear bolt heads and inserts for small conductor sizes.
- Made of special aluminium alloy, these contact bolts are double shear bolt heads with hexagon heads. The bolts are treated with a highly lubricating agent.
- Contact bolts are irremovable once their heads have been sheared off. The internal surface of the conductor holes are grooved.
- The connectors are chamfered at the edges and available with or without oil barrier (as blocked and unblocked types) depending on the application requirements.
- The bolted fitting featured herein was developed specifically for use in medium voltage cable accessories up to 42 kV

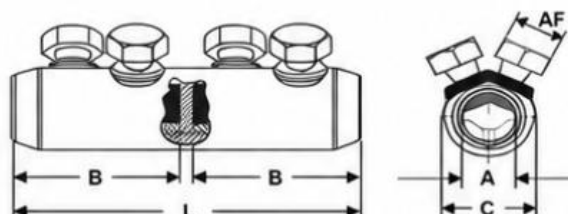


CABLE SIZE MM ²	DIMENSIONS mm					NUMBER OF BOLTS	HEAD SIZE AF MM	PRODUCT CODE	ECC ITEM CODE
	BLOCKED	L	B	C	A				
25-95	YES	65	30	24	12.8	2	13	EMC 25-95	83000000
	NO							EMCN 25-95	83000001
35-150	YES	80	38	28	15.8	2	17	EMC 35-150	83000002
	NO							EMCN 35-150	83000003
95-240	YES	125	60	33	20	4	19	EMC 95-240	83000004
	NO							EMCN 95-240	83000005
120-300	YES	140	68	37	24.0	4	22	EMC 120-300	83000006
	NO							EMCN 120-300	83000007
185-400	YES	170	83	42	25.5	6	22	EMC 185-400	83000008
	No							EMCN 185-400	83000009
500	YES	160	75	46	29.6	6	13	EMC 500	83000010
630	YES	160	75	50	33	6	13	EMC 630	83000011
800	YES	220	105	56	36	6	27	EMC 800	83000012

ECC MECHANICAL LUGS – EML

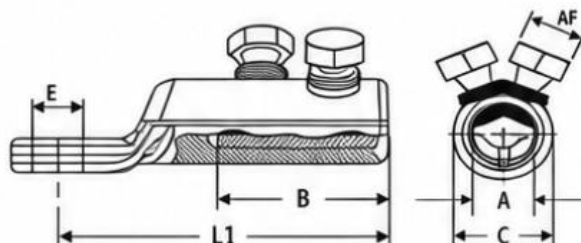


CABLE SIZE Mm ²	PALM HOLE SIZE E	DIMENSIONS mm				NUMBER OF BOLTS	HEAD SIZE AF MM	PRODUCT CODE	ECC ITEM CODE
		C	A	L1	B				
25-95	13	24	12.8	62.5	32	1	13	EML 25-95/13	82800000
	17	24	12.8	62.5	32	1	17	EML 25-95/17	82800001
35-150	13	28	15.8	86	36	1	13	EML 35-150/13	82800002
	17	28	15.8	86	36	1	17	EML 35-150/17	82800003
95-240	13	33	20	111.5	65	2	19	EML 95-240/13	82800004
	17	33	20	111.5	65	2	19	EML 95-240/17	82800005
120-300	13	37	24	115.5	70	2	22	EML 120-300/13	82800006
	17	37	24	115.5	70	2	22	EML 120-300/17	82800007
185-400	13	42	25.5	137	85	3	22	EML 185-400/13	82800008
	17	42	25.5	137	85	3	22	EML 185-400/17	82800009
	21	42	25.5	137	85	3	22	EML 185-400/21	82800010
500-630	13	50	33	153	110	3	27	EML 500-630/13	82800011
	17	50	33	153	110	3	27	EML 500-630/17	82800012
800	21	56	36	185	130	4	27	EML 800/21	82800014

ECC REPAIR CONNECTORS - ERC

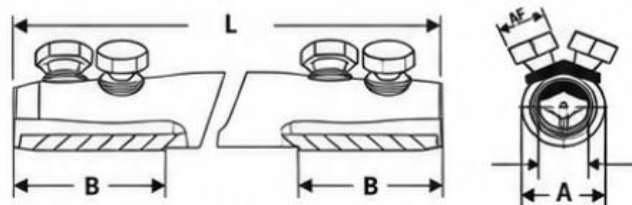

CABLE SIZE	BLOCKED	DIMENSIONS mm				NUMBER OF BOLTS	HEAD SIZE AF MM	PRODUCT CODE	ECC ITEM CODE
		L	B	C	A				
25-95	NO	445	30	24	12.8	2	13	ERC 25-95	83000013
35-150	NO	445	38	28	15.8	2	17	ERC 35-150	83000014
95-240	NO	445	60	33	20	4	19	ERC 95-240	83000015
120-300	NO	445	68	37	24	4	22	ERC 120-300	83000016
185-400	NO	445	83	42	25.5	4	22	ERC 185-400	83000017

ECC REDUCER TYPE BOLTED CONNECTORS - ERBC

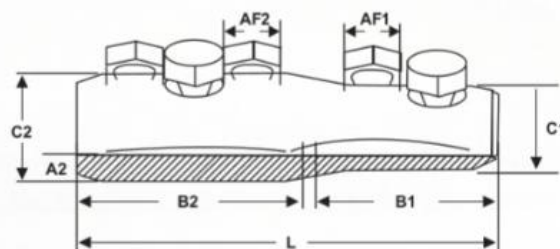

Cross Sectional Area (mm ²)		DIMENSIONS (mm)							No. of Bolts Side1	No. of Bolts Side2	AF Side1	AF Side2	Product Code	ECC ITEM CODE
Side 1	Side 2	C1	A1	C2	A2	L	B2	B1						
25-95	95-240	24	12.8	33	20	125	60	32	1	2	13	19	ERBC 25/95-95/240	83000018
95-240	185-400	33	20	42	25.5	170	80	60	2	3	19	22	ERBC 95/240-185/400	83000019
185-400	500	42	25.5	46	30	190	90	85	3	3	22	27	ERBC 185/400-500	83000020
185-400	630	42	25.5	50	33	200	95	85	3	3	22	27	ERBC 185/400-630	83000021
500	630	46	30	50	33	200	95	95	3	3	27	27	ERBC 500-630	83000022



ECC HIGH VOLTAGE MECHANICAL CONNECTORS - EHVC

- ECC has torque-controlled Lugs and Connectors for High Voltage Terminations and Joints.
- ECC's High Voltage Mechanical Connectors are designed to fit perfectly on to the various types of high voltage cable.
- Connectors available from 240 sq.mm to 1600 Sq.mm High Voltage cables.
- Connectors and Lugs have designed with 4 to 10 shear head bolts based on the cable sizes and length of the body.
- High Voltage lugs available with different variety of palms with 1 to 4 Holes.



ECC GROUNDING BOLTED CONNECTORS & LUGS - EGBC & EGBL

- ECC's Grounding Connectors and Lugs are suitable for copper / aluminium wires and conductors for branching application.
- Connectors and lugs available to suit cables sizes from 10 Sq.mm to 50 Sq.mm.
- Grounding connectors can be used in underground jointing kits to connect earthing/grounding wires.




ECC BRANCHING MECHANICAL CONNECTORS - EBMC

- Branching connectors with multiple shear bolts and inserts allowing a range taking ability suitable for UG branching joint applications.
- Vee type design ensure ease of installation, alignment and reduces connectors resistance.
- No special tool required to install these connectors, only socket or spanner sizes of 15, 19 and 21 MM required for installation.
- Inserts to be used for smaller conductors.

ECC MECHANICAL LUGS CENTER PALM – EMLC

- ECC's EMLC Center palmed Shear Bolt Lugs with Concentric Palm are designed for use in low and medium voltage terminations.
- The bolts are treated with a highly lubricating agent. Contact bolts are irremovable once their heads have been sheared off.
- The Lug body is made of a high-tensile, tin-plated aluminium alloy.
- The internal surface of the conductor holes are grooved.
- All products consist of a tin-plated body, shear head bolts and inserts for small conductor sizes.
- These contact bolts are double shear head bolts with outer hexagon heads and made of special aluminium alloy.

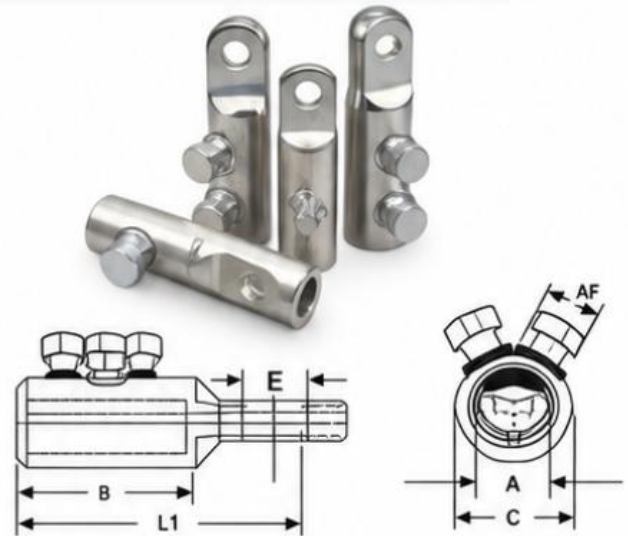


CABLE SIZE mm ²	DIMENSIONS mm				PALM (D3) HOLE SIZE	NUMBER OF BOLTS	HEAD SIZE IN MM AF	PRODUCT CODE	ECC ITEM CODE
	A	C	L1	B					
25-95	12.8	24	77.5	30	13	1	13	EMLC 25-95	83000023
35-150	15.8	28	77.5	32	13	1	17	EMLC 35-150	83000024
95-240	20	33	108	60	13/17	2	19	EMLC 95-240	83000025
120-300	24	38	110	65	13/17	2	22	EMLC 120-300	83000026
150-400	26	42	112.5	70	13/17	3	17	EMLC 150-400	83000027
500-630	33	50	154	100	13/17/21	3	27	EMLC 500-630	83000028
800	36	56	185	130	17/21	4	27	EMLC 800	83000029

LOW TENSION MECHANICAL CONNECTORS – LTMC




- Low Tension Mechanical Connectors are used in low voltage underground applications up to 1.1 kV.
- These connectors are suitable for LV sector shaped aluminium cables.
- LTMCs are range taking and conductors are tightened by means of torque limiting shear bolts for better performance and reliability.
- These connectors as type tested as per IEC 61238-1 Part-1 Class-B.

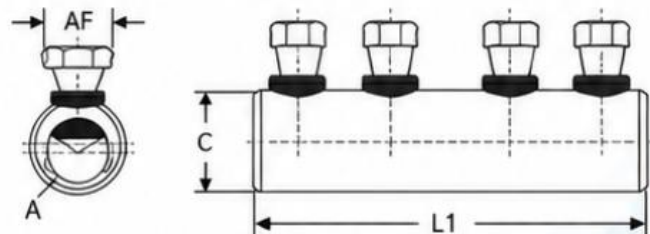

CABLE SIZE	BLOCKED	DIMENSIONS mm			INSERT	NUMBER OF BOLTS	HEAD SIZE IN MM AF	PRODUCT CODE	ECC ITEM CODE
		A	C	L					
25-70	NO	11.8	19.0	56	NO	2	13	LTMC 25-70	83000030
95-150	NO	16.5	25	70	NO	2	17	LTMC 95-150	83000031
185-300	NO	24	33	120	YES	4	19	LTMC 185-300	83000032
400	NO	30	40	128	NO	4	22	LTMC 400	83000033



ONE PARTNER.
INFINITE SOLUTIONS.



HEAD OFFICE

G.no 209, Office no – 609,
Swaraj Capital, Pimpri
Chinchwad, Pune – 412105,
Maharashtra, India



PHONE

+91 9877664882



EMAIL

info@fluxindia.co.in



WEBSITE

www.fluxindia.co.in