

CABLE TIES





NYLON CABLE TIES



PROTECTED

GENERAL INFORMATION:


Material	Nylon 66
Colour	Natural, Black (Other colour as per request)
Length Range	100mm to 1020mm
Width Range	2.5mm (0.1"), 3.6mm (0.14"), 4.8mm (0.19"), 7.6mm (0.3") 9.0mm (0.35")
Approvals	     

PHYSICAL PROPERTIES

Temperature Range	-40°C to +85°C
Max Bundle Diameter	Various by size of the tie
Min Tensile Strength	Various by size of the tie
Weather Resistance	Natural is UV resistant: Black is UV stabilized for better outdoor performance.

MECHANICAL PROPERTIES

Tensile Strength	Typically around 50-120 Mpa
Elongation at Break	30-300%
Melting Point	Approximately 256°C (492.8°F)
Flammability Rating	UL 94 V-2

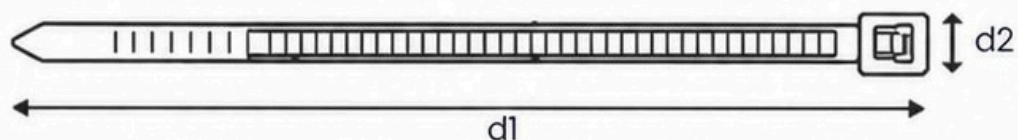

Cat. No.	Nominal Overall Length		Strap Width		Max Bundle Cable Dia		Thick-ness	Min Loop Tensile Strength	
	d1 mm	inch	d2 mm	inch	mm	inch	mm	kgf	lbs
MINIATURE SERIES									
ET 100 x 1.8	100	4.0	1.8	0.07	20	0.79	0.7	0.7	16
ET 100 x 2.5	100	4.0	2.5	0.10	20	0.79	0.9	0.8	18
ET 100 x 2.5	100	4.0	2.5	0.10	20	0.79	0.9	0.8	18
ET 150 x 2.5	150	6.0	2.5	0.10	35	1.38	0.9	0.8	18
ET 200 x 2.5	200	8.0	2.5	0.10	50	1.96	0.9	0.8	18
INTERMEDIATE SERIES									
ET 150 x 3.6	150	6.0	3.6	0.14	35	1.38	1.2	18	40
ET 200 x 3.6	200	8.0	3.6	0.14	45	1.77	1.3	18	40
ET 250 x 3.6	250	10.0	3.6	0.14	65	1.77	1.2	18	40
ET 300 x 3.6	300	12.0	3.6	0.14	65	2.95	1.2	18	40
ET 200 x 4.8	200	8.0	4.8	0.19	45	1.77	1.3	23	50
ET 250 x 4.8	250	12.0	4.8	0.19	75	2.36	1.3	23	50
ET 300 x 4.8	300	14.0	7.6	0.30	75	2.95	1.3	23	50
ET 350 x 4.8	350	14.0	4.8	0.19	90	3.80	1.3	23	50
ET 400 x 4.8	400	16.0	4.8	0.19	105	4.20	1.3	23	50
ET 450 x 4.8	450	18.0	4.8	0.19	115	4.53	1.3	23	50
ET 500 x 4.8	450	18.0	7.6	0.30	100	4.60	1.4	54.4	120
HEAVY DUTY SERIES									
ET 200 x 7.6	20	8.0	7.6	0.30	45	1.77	1.4	54.4	120
ET 300 x 7.6	300	12.0	7.6	0.30	75	2.95	1.4	54.4	120
ET 400 x 7.6	400	16.0	7.6	0.30	100	3.93	1.4	54.4	120
ET 450 x 7.6	450	18.0	7.6	0.30	115	4.60	1.4	54.4	120
ET 550 x 7.6	550	22.0	7.6	0.30	145	5.80	1.4	54.4	120
ET 650 x 7.6	650	26.0	7.6	0.30	180	7.20	1.4	54.4	120
ET 760 x 7.6	760	30.0	7.6	0.30	218	8.20	1.4	54.4	120
ET 920 x 9.0	920	38.8	9.0	0.35	265	10.20	1.55	80.0	175
ET 1020 x 9.0	1020	40.0	9.0	0.35	306	12.00	1.55	80.0	175
TAG TYPE SERIES									
ET- T 100 x 2.5	100	4	2.5	0.10	20	0.79	0.9	8	18

STAINLESS STEEL NON-RELEASABLE

CABLE TIES



GENERAL INFORMATION :

Material	Stainless Steel
Length Range	Varies from 100mm (4") to 1000mm (40")
Width Range	Typically 4.6mm (0.18") to 7.9mm (0.31")
Approvals	 

PHYSICAL PROPERTIES

Temperature Range	-60°C to 500°C (-68°F to 932°F)
Corrosion Resistance	Excellent resistance to corrosion, particularly in acidic and chloride environment.

MECHANICAL PROPERTIES

Tensile Strength	Typically around 550-720 Mpa
Elongation at Break	40-60%
Yield Strength	240-310 MPA
Hardness	95-198 (Rockwell B Scale)

4.6mm SERIES

Cat. No.	Nominal Overall Length		Strap Width		Max Bundle Cable Dia		Thick-ness	Min Loop Tensile Strength	
	mm	inch	mm	inch	mm	inch	mm	mm	inch
ET-ST 100 X 4.6	100	4	4.6	0.18	27	1.1	0.25	68	150
ET-ST 150 X 4.6	150	6	4.6	0.18	43	1.7	0.25	68	150
ET-ST 200 X 4.6	200	8	4.6	0.18	59	2.3	0.25	68	150
ET-ST 250 X 4.6	260	10	4.6	0.18	75	3.0	0.25	68	150
ET-ST 300 X 4.6	300	12	4.6	0.18	86	3.4	0.25	68	150
ET-ST 360 X 4.6	360	14.40	4.6	0.18	97	3.95	0.25	68	150
ET-ST 400 X 4.6	400	16	4.6	0.18	118	4.60	0.25	68	150
ET-ST 450 X 4.6	450	17.71	4.6	0.18	129	5.10	0.25	68	150
ET-ST 500 X 4.6	520	20.80	4.6	0.18	140	5.72	0.25	68	150
ET-ST 620 X 4.6	620	24.8	4.6	0.18	167	6.82	0.25	68	150
ET-ST 680 X 4.6	680	27.20	4.6	0.18	183	7.48	0.25	68	150
ET-ST 840 X 4.6	840	33.60	4.6	0.18	227	9.25	0.25	68	150
ET-ST 1000 X 4.6	1000	40	4.6	0.18	270	11.0	0.25	68	150

7.9mm SERIES

Cat. No.	Nominal Overall Length		Strap Width		Max Bundle Cable Dia		Thick-ness	Min Loop Tensile Strength	
	mm	inch	mm	inch	mm	inch	mm	mm	inch
ET-ST 100 X 7.9	100	4	7.9	0.32	27	1.1	0.25	68	150
ET-ST 150 X 7.9	150	6	7.9	0.32	43	1.7	0.25	68	150
ET-ST 200 X 7.9	200	8	7.9	0.32	59	2.3	0.25	68	150
ET-ST 260 X 7.9	260	10	7.9	0.32	75	3.0	0.25	68	150
ET-ST 300 X 7.9	300	12	7.9	0.32	86	3.4	0.25	68	150
ET-ST 380 X 7.9	380	14.40	7.9	0.32	97	3.95	0.25	68	150
ET-ST 400 X 7.9	400	16	7.9	0.32	118	4.60	0.25	68	150
ET-ST 520 X 7.9	520	20.80	7.9	0.32	140	5.72	0.25	68	150
ET-ST 620 X 7.9	620	24.8	7.9	0.32	167	6.82	0.25	68	150
ET-ST 680 X 7.9	680	27.20	7.9	0.32	183	7.48	0.25	68	150
ET-ST 840 X 7.9	840	33.60	7.9	0.32	227	9.25	0.25	68	150
ET-ST 1000 X 7.9	1000	40	7.9	0.32	270	11.0	0.25	68	150

STAINLESS STEEL CABLE TIE

TENSIONNING TOOL

GENERAL INFORMATION :

Model	ET-SSC-600
Colour	Black
Material	Stainless Steel
Width	12mm
Length	210mm
Weight	0.57kg




About this item


Cutting Range	For cable ties width up to 12mm(0.47") and thickness up to 0.3mm steel plate.
Feature	Professional Cable Tie gun, cutting ties without sharp edges, self-locking, easy fitting, are unable to be separated after button up.
Application	Adjustable tension can work with any length of cable tie wrap, such as self-locking stainless steel cable ties.
Easy to Use	After the cable tie is tightened, pull up the cutter bar, then it will be cut off easily and cleanly without rough edges.

Stainless Steel self locking function

Initial position:

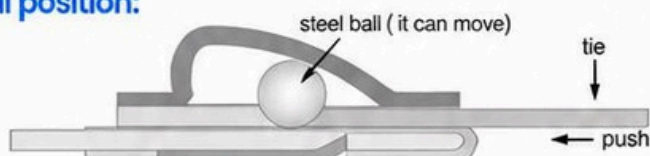

When locked:

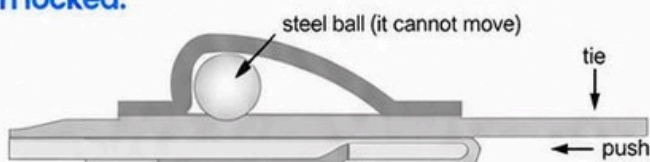

Industries

- Solar Energy
- Marine
- Telecommunications
- Industrial Automation
- Railway Infrastructure
- Power Distribution
- Oil & Gas