

POLYAMIDE FLEXIBLE CONDUIT & ACCESSORIES




POLYAMIDE FLEXIBLE

CONDUIT PIPE

GENERAL INFORMATION :

Material	Polyamide 6
Colour	Black RAL 9005/ Grey RAL 7035
Flexural Strength	950 Kg / cm ²
Flexural Modulus	26,000 Kg / cm ²
Tensile Strength	700 Kg / cm ²
Impact Strength	25 Kg / cm ²
Temperature Range	-40°C to +105°C
Resistant	Oil, petrol, acidic, alkalis, Sea Water etc
Approvals	CE 

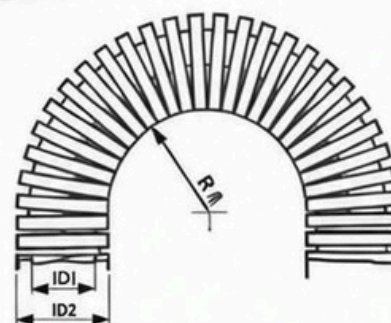


Cot. No.	Conduit Ø and Size	I.D. d1 (mm)	O.D. d2 (mm)	Bending Radius R (mm) + 10%
ETP-7	-----	5	7	10
ETP-10	ETO-7	6.4	10	20
ETP-13.5	ETO-9	8.6	13	30
ETP-19	ETO-1	11.8	15.8	40
ETP-18.5	ETO-13.5	14.3	18.5	42
ETP-22	ETO-16	15.9	21.2	45
ETP-28	ETO-21	20.7	28.5	55
ETP-34	ETO-29	27.8	34.5	60
ETP-42	ETO-36	36	42.5	65
ETP-54	ETO-48	48.3	54.5	80
ETP-67	ETO-57	57	67.2	92
ETP-80	ETO-67	67	80	106
ETP-106	ETO-93	83	105	116

POLYAMIDE FLEXIBLE SLITTED CONDUIT PIPE

GENERAL INFORMATION :

Material	Polyamide 6
Colour	Black RAL 9005 / Grey RAL7035
Flexural Strength	950 Kg / cm ²
Flexural Modulus	26,000 Kg / cm ²
Tensile Strength	700 Kg / cm ²
Impact Strength	25 Kg / cm ²
Temperature Range	-40°C to +120°C Continuous, +150°C Short Term
Resistant	Oil, petrol, acids, alkalis, Sea Water etc
Approvals	CE 

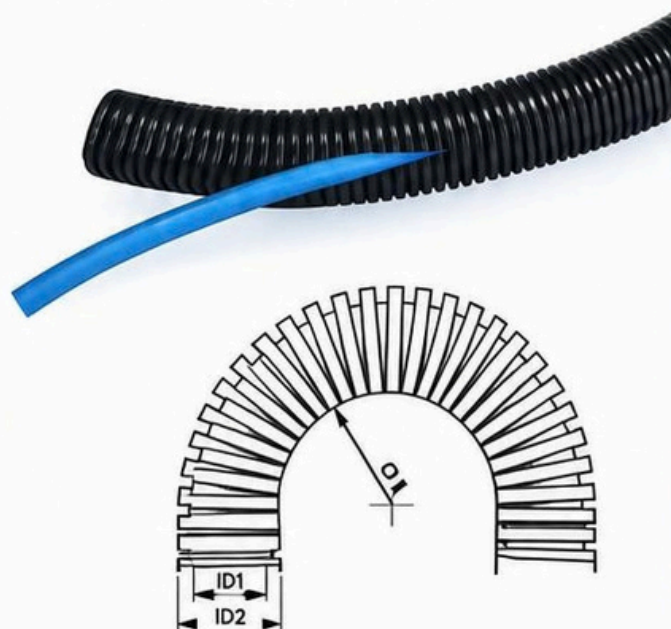


Cat. No.	Conduit Gland Size	I.D. d1 (mm)	O.D. d2 (mm)	Bending Radius R (mm) + 10%
ETP-10	ETO-7	6.4	10	20
ETP-13.5	ETO-9	9.6	13	30
ETP-19	ETO-11	11.8	15.8	40
ETP-18.5	ETO-13.5	14.3	18.5	42
ETP-22	ETO-16	16.9	21.2	45
ETP-28	ETO-21	20.7	28.5	55
ETP-34	ETO-29	27.8	34.5	60
ETP-42	ETO-36	36	42.5	65
ETP-54	ETO-48	48.3	54.5	80
ETP-67	ETO-67	57	67.2	92
ETP-80	ETO-67	67	80	106
ETP-106	ETO-93	83	106	115

POLYAMIDE FLEXIBLE

CONDUIT GLAND

GENERAL INFORMATION :

Material	Polyamide 6
Temperature Range	-40°C to +120°C Continuous, +160°C Short Term
Resistant	Oil, petrol, acids, alkalis, Sea Water etc
Approvals	 

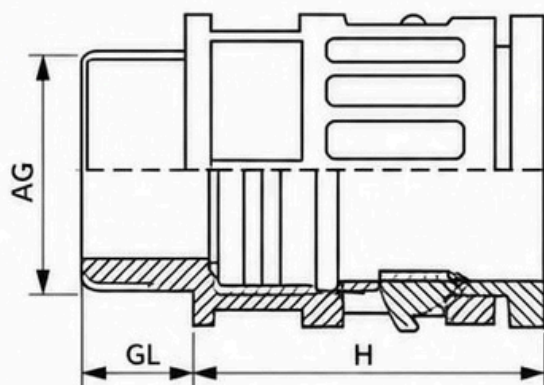


Cat. No.	Conduit Size	(AG) mm	(AG) mm Thread length	(GL) mm	(H) mm
ETO-7	ETP-10	12.3	6.5	11.5	18
ETO-9	ETP-13.5	15	10	11.5	19
ETO-11	ETP-16	18.5	12.5	12	23
ETO-13.5	ETP-18.5	20.2	14.3	12	12
ETO-16	ETP-22	22.3	17	13	27
ETO-21	ETP-28	28	23	13	33
ETO-29	ETP-34	36.7	29	15	35
ETO-36	ETP-42	46.7	36	15	38.5
ETG-48	ETP-54	59	53	16	39

POLYAMIDE FLEXIBLE CONDUIT 90° ELBOW GLAND

GENERAL INFORMATION :

Material	Polyamide 6
Temperature Range	-40°C to +120°C Continuous, +150°C Short Term
Resistant	Oil, petrol acids, alkalis, Sea Water etc
Approvals	CE 

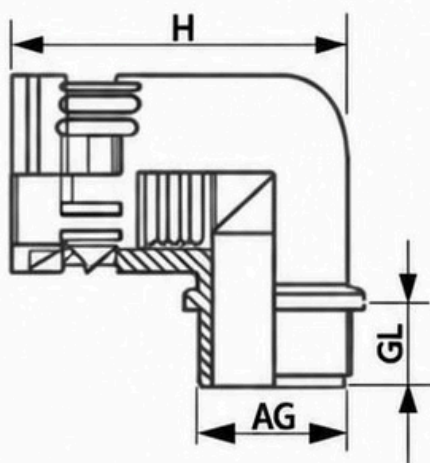


Model No.	AG	GL	H	Piece Pack
ETET-9	15	10.6	36.7	100
ETEO-11	18.2	10	42.5	100
ETEO-13.5	20.1	13	45.5	50
ETEO-16	22	13.3	49.5	50
ETEO-21	28	13.3	57.2	50
ETEO-29	36.7	15	65.5	25
ETEO-36	46.7	15	79.6	20
ETEO-48	58.3	15	94	10

POLYAMIDE FLEXIBLE

CONDUIT METRIC GLAND

GENERAL INFORMATION :

Material	Polyamide 6
Temperature Range	-40°C to +120°C Continuous, +160°C Short Term
Resistant	Oil, petrol, acids, alkalis, Sea Water etc
Approvals	 

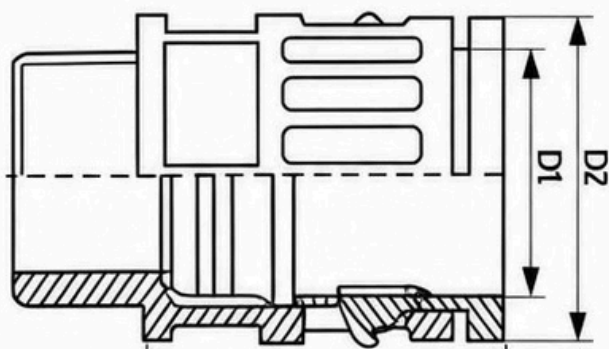


Cat. No.	Conduit Gland Size	Inner Diameter (D1 mm)	Outer Diameter (D2 mm)
ETMG-16	ETP-16	11.8	15.8
ETMG-20 (M-15.8)	ETP-19	11.8	15.8
ETMG-20 (M-21.2)	ETP-22	15.9	21.2
ETMG-25 (M-21.2)	ETP-22	15.9	21.2
ETMG-25 (M-28.2)	ETP-28	21.7	28.5
ETMG-32	ETP-34	27.8	34.5
ETMG-40	ETP-42	36.0	42.5
ETMG-50	ETP-54	48.3	54.5
ETMG-63	ETP-54	48.3	54.5

POLYAMIDE FLEXIBLE CLAMP

GENERAL INFORMATION :

Material	Polyamide 6
Temperature Range	-40°C to +120°C Continuous, +150°C Short Term
Resistant	Oil, petrol, acids, alkalis, Sea Water etc
Approvals	CE RoHS

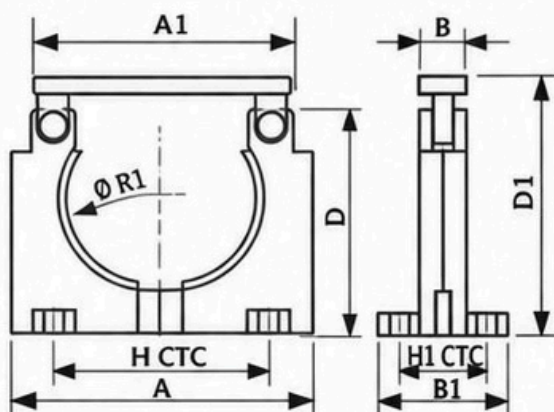


Cat. No.	Clamp Size	A mm	A1 mm	B mm	B1 mm	D mm	D1 mm	H mm CTC	H1 mm CTC	R1 mm
ETC-7	ETP-10	---	---	---	---	---	---	---	---	---
ETC-9	ETP-13.5	24	18	10	28	23	26	---	20	10
ETC-11	ETP-16	28	22	14	32	24	28	---	24	14
ETC-13.5	ETP-18.5	30	25	14	34	25	30	---	24	15
ETC-16	ETP-22	34	28	14	34	22	34	---	26	20
ETC-21	ETP28	39	39	14	38	40	44	---	27	25
ETC-29	ETP-34	45	45	14	38	44	50	36	27	33
ETC-36	ETP-42	55	55	14	41	53.5	59	37	27	40.5
ETC-48	ETP-53	70	70	14	41	65	73	57	27	48

POLYAMIDE FLEXIBLE T-TYPE CONNECTOR GLAND

GENERAL INFORMATION :

Material	Polyamide 6
Temperature Range	-40°C to +120°C Continuous, +150°C Short Term
Resistant	Oil, petrol acids, alkalis, Sea Water etc
Approvals	CE  RoHS

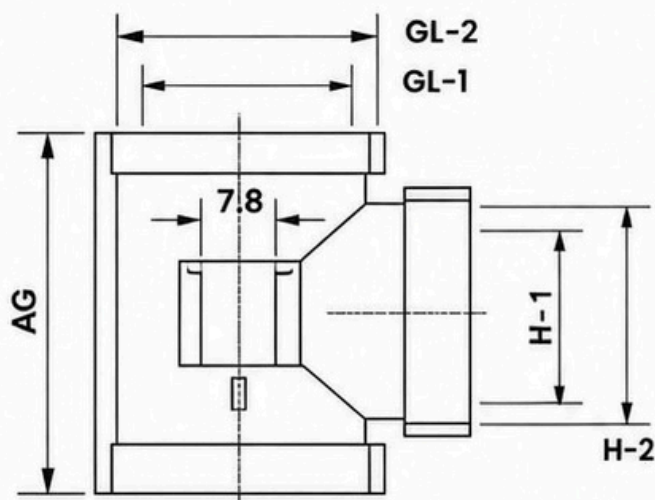

Model No.	AG	GL-1	GL-2	H-1	H-2
ETTC - 13.5	32.0	12.0	17.0	12.0	16.8
ETTC - 15.8	35.8	14.5	20.0	14.5	19.8
ETTC - 21.2	43.4	20.0	25.5	20.0	24.8