


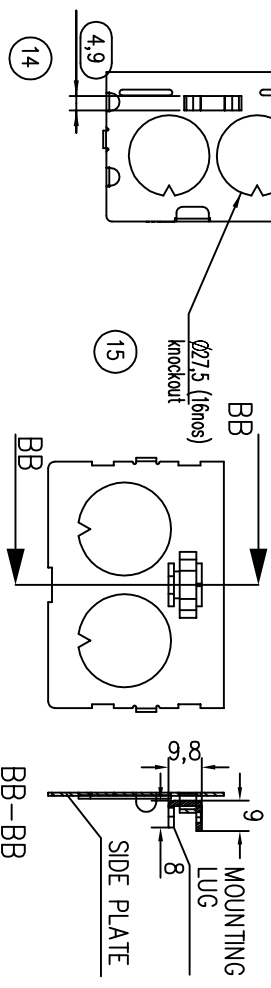


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

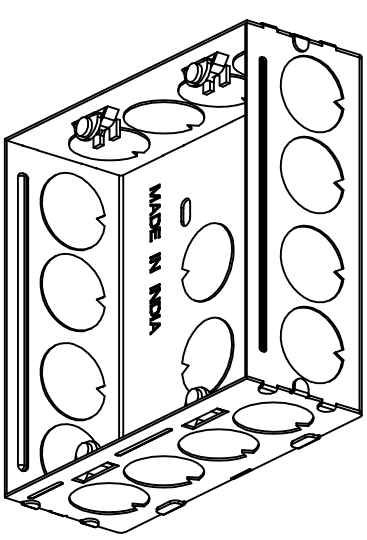

- NOTE:-
- 1) PLATING SHALL BE PRE GALVANIZING WITH SPANGLER FINISH (MIN 120 GSM).
 - 2) PLATING SHALL COMPLAINT 200 HOURS SALT SPRAY TEST OF IS: 1573.
 - 3) PLASTIC CAP TO BE USE TO COVER THE THREAD PORTION OF THE LUG.
 - 4) ALL CHARACTER OF PRODUCT CODE, EARTH SYMBOL, ORIGIN MARKING, HONEYWELL LOGO SHOULD BE LASER MARKED & THE MARKING DEPTH SHOULD BE 2 MICRONS.
 - 5) USE ARIAL BLACK FONT FOR PRODUCT CODE & THE FONT SIZE TO BE 4MM.
 - 6) USE SPECIFIED FONT FOR HONEYWELL LOGO & SIZE SHOULD BE 4MM.
 - 7) THIS PRODUCT MUST BE PRODUCED USING ROHS COMPLAINT MATERIAL.

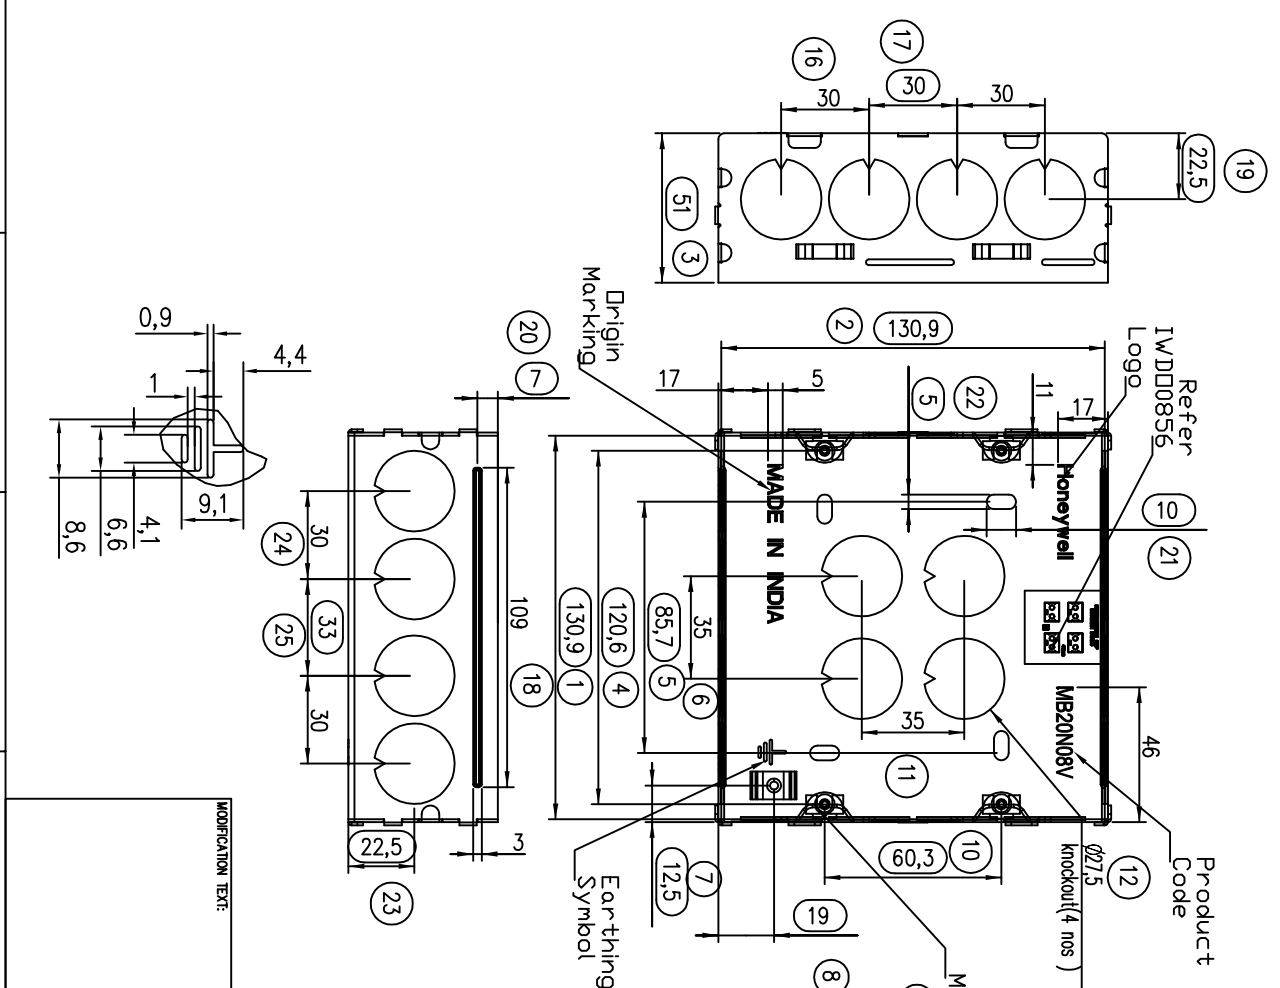

MODIFICATION TEXT:		HONEYWELL ED&S INDIA LTD		DIMENSIONS AND TOLERANCES PER		HONEYWELL ED&S INDIA LTD	
		HONEYWELL CONFIDENTIAL AND PROPRIETARY		BRITISH STANDARDS AND		HONEYWELL ED&S INDIA LTD	
		PROTECTED BY DIN ISO 16016		ECC ENGINEERING STANDARDS		HONEYWELL ED&S INDIA LTD	
		FIRST PAPER PRODUCTION		FINISH		SUB TITLE	
		UNITS: mm		NATURAL		MODULAR BOX 8 MV	
		LINEAR: ±0.15		DRAWING NO./PART CODE		ME20N08V	
		HOLE DIA: ±0.08		ECO No.		REV	
		RADIUS: ±0.05		ECO DATE		00	
		ANGULAR: ±0.50		PAPER SIZE: A3		SCALE: N.T.S.	
		DRAWN BY DATE: 11-Sep-2021		PROJ. NO. XXXXXX		SHEET 1 OF 1	