

# SL7N-125D

## DC CIRCUIT BREAKER



### GENERAL PARAMETERS

- Overload protection to avoid more damage to whole system
- Unique mold design have garnered much admiration from many customers
- Aesthetically pleasing design, compact size, lightweight, quick release mechanism, and rail-mounted. The casing and components are made of high-impact resistant and flame-retardant plastic, ensuring excellent and reliable performance.
- High voltage big ampere and small size to save install
- space and save costSuitable for installation in harsh environments with high temperature and humidity resistance

### PRODUCT ADVANTAGES

The SL7N-125D/DH plastic enclosure circuit breaker is a limited current type breaker with overload and short circuit protection, suitable for overload and short circuit protection in DC systems up to 1500V. It is widely used in DC screens, DC distribution cabinets, DC junction boxes, photovoltaic and wind power substations, and communication distribution box protection systems. It can also be used for infrequent on-off switching of circuits under normal conditions.



### INSTALLATION PRECAUTIONS

- In a medium without explosion risk and free of gases and dust(including conductive dust) sufficient to corrode metal and destroy insulation
- In the condition with no snow erosion
- It can be installed horizontally and vertically
- The magnetic field of the installation position shall not exceed 5 times the geomagnetic field in any direction;
- It should not be installed in flammable and explosive places
- There should be no significant impact and vibration at the installation place

### MODEL AND SIGNIFICANCE

|                 |               |               |                           |
|-----------------|---------------|---------------|---------------------------|
| S               | L7N           | 1500          | H                         |
| Enterprise code | Design Number | Rated Voltage | High Voltage              |
| 1/2/3/4         | 125A          | PV            | 1500V                     |
| Pole            | Rated Current | PV system     | Rated Operational Voltage |

### DIMENSION (MM)

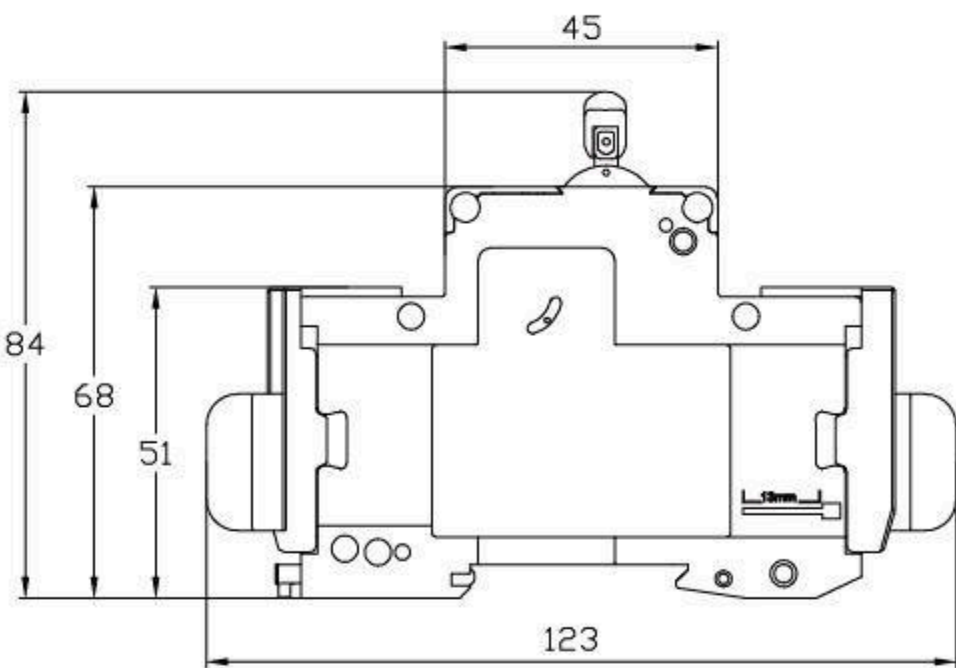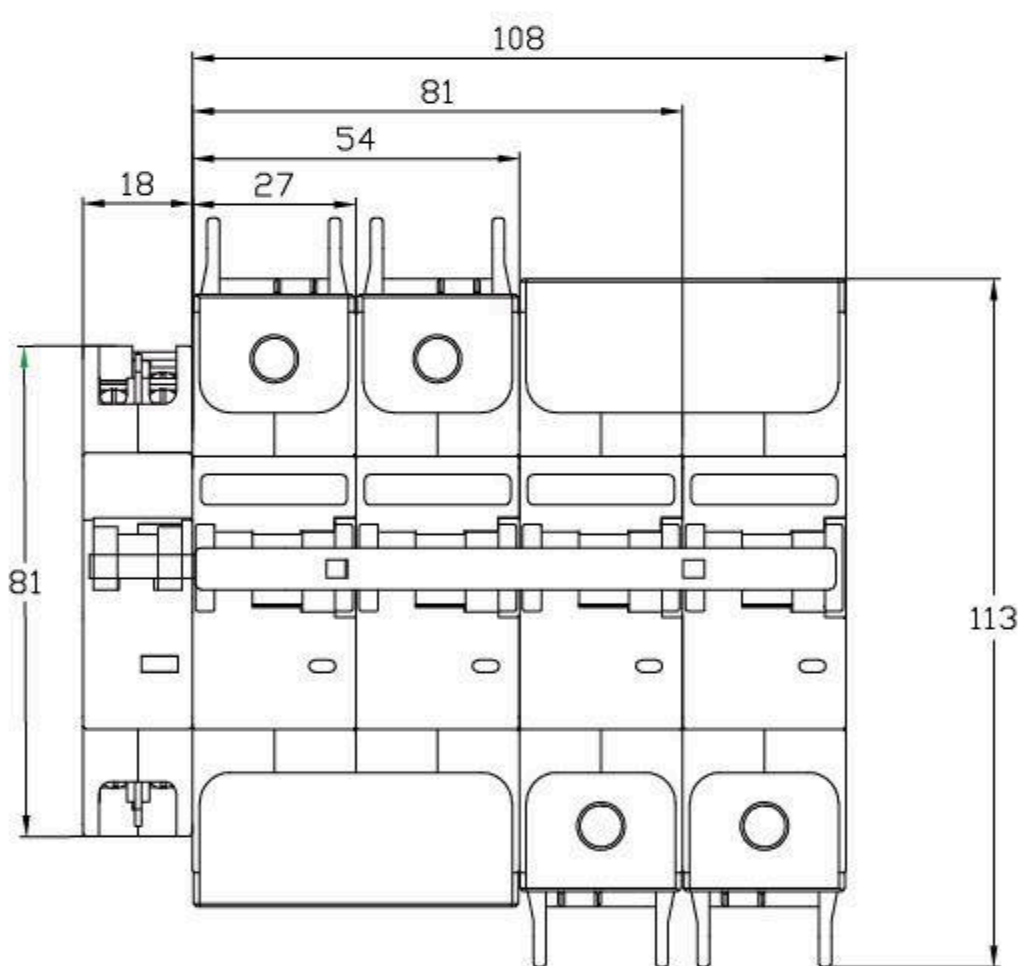

### ELECTRICAL PARAMETERS

| Product Model                                        | SL7N-125D                                               |                               |                     |             |                |                              |                   |                   |
|------------------------------------------------------|---------------------------------------------------------|-------------------------------|---------------------|-------------|----------------|------------------------------|-------------------|-------------------|
| Pole                                                 | 1P                                                      | 2P                            | 3P                  | 4P          | 1P             | 2P                           | 3P                | 4P                |
| Rated Operational Voltage/U <sub>e</sub> (V)         | DC48~250V/<br>DC375V/DC440V<br>/DC600V                  | DC750V/<br>DC800V/<br>DC1000V | DC1200V/<br>DC1500V | DC1500V     | DC48-250V      | DC375V/<br>DC440V/<br>DC600V | DC750V/<br>DC800V | DC750V/<br>DC800V |
| Rated Operational Current/I <sub>n</sub> (A)         | 6A/10A/16A/20A/25A/32A/40A/50A/63A/80A                  |                               |                     |             | 100A/125A      |                              |                   |                   |
| Rated Impulse withstand Voltage/U <sub>imp</sub> (V) | 690V                                                    | 1250V                         | 1600V               |             | 690V           | 1250V                        | 1600V             |                   |
| Ultimate Breaking Capacity/I <sub>cu</sub> (kA)      | SL7N-125D 2KA                                           |                               |                     |             | SL7N-125DH 6KA |                              |                   |                   |
| Rated Breaking Capacity/I <sub>cs</sub> (kA)         | SL7N-125D 2KA                                           |                               |                     |             | SL7N-125DH 6KA |                              |                   |                   |
| Max. Impulse Current/U <sub>imp</sub> (A)            | 6KV                                                     |                               | 8KV                 |             | 6KV            |                              | 8KV               |                   |
| Mechanical Life                                      | 30000 TIMES                                             |                               |                     |             |                |                              |                   |                   |
| Electrical Life                                      | 1000 TIMES                                              |                               |                     |             |                |                              |                   |                   |
| Fire-retardant Enclosure Level                       | V-0                                                     |                               |                     |             |                |                              |                   |                   |
| Ingress Protection                                   | IP40                                                    |                               |                     |             |                |                              |                   |                   |
| Device Width x Height (mm)                           | 93*27*65.5                                              | 93*54*65.5                    | 93*81*65.5          | 93*108*65.5 | 93*27*65.5     | 93*54*65.5                   | 93*81*65.5        | 93*108*65.5       |
| Method of Mounting                                   | 35mm din rail install                                   |                               |                     |             |                |                              |                   |                   |
| Mounting                                             | Easy installed and fastening onto 35mm device rail(DIN) |                               |                     |             |                |                              |                   |                   |
| Location                                             | Indoor or in the Water-proof Box                        |                               |                     |             |                |                              |                   |                   |
| Ambient Temperture                                   | -40℃-85℃                                                |                               |                     |             |                |                              |                   |                   |
| Altitude                                             | ≤2000m                                                  |                               |                     |             |                |                              |                   |                   |
| Relative Humidity                                    | +50℃ not more than 95%                                  |                               |                     |             |                |                              |                   |                   |
| Weight(per pole)                                     | 0.18kg                                                  | 0.36kg                        | 0.54kg              | 0.72kg      | 0.18kg         | 0.36kg                       | 0.54kg            | 0.72kg            |
| Pollution Level                                      | 2                                                       |                               |                     |             |                |                              |                   |                   |
| Installation Class                                   | II class or III class                                   |                               |                     |             |                |                              |                   |                   |