

605117
STOCK CODE


Deye

SOLAR WATER PUMP

1.1-2.2Kw Swimming Pool Solar Pump

0.6-3.0Kw Submersible Solar Pump


5.5-13Kw High Speed Submersible Solar Pump

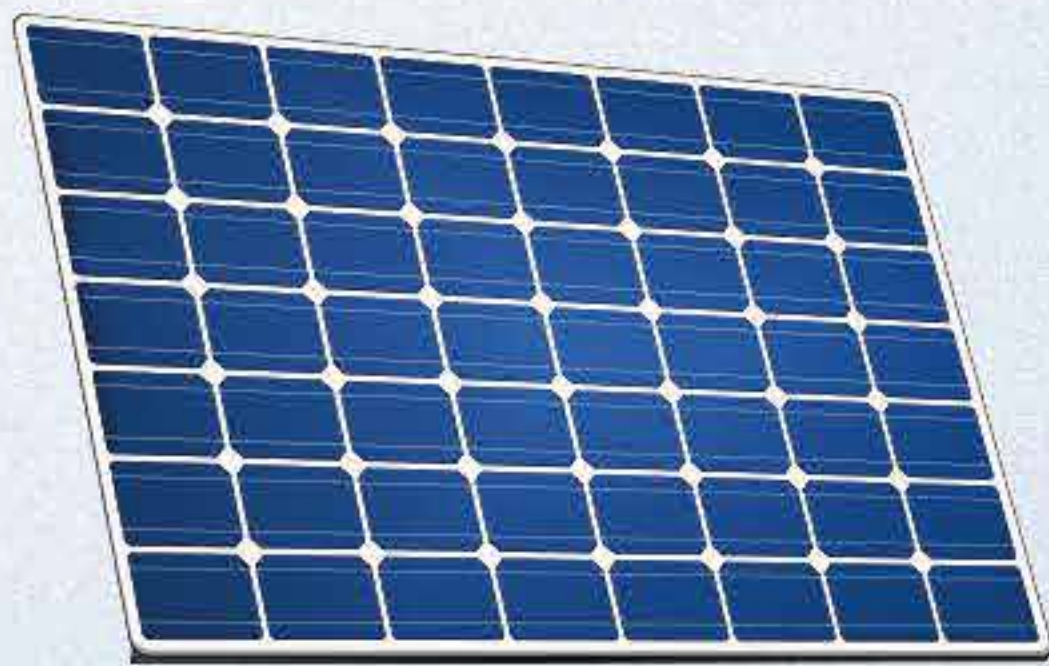

✉ solarac.sales@deye.com.cn ☎ 86-0574 6397 1382 🌐 www.deyesolar.com

📍 Zhejiang Deye Electrical Appliances Co., Ltd.No.889 Waitang Road, Haiyan, Jiaxing, Zhejiang, 314300 P.R.China

3 C1100 / PC 4.5 - 165

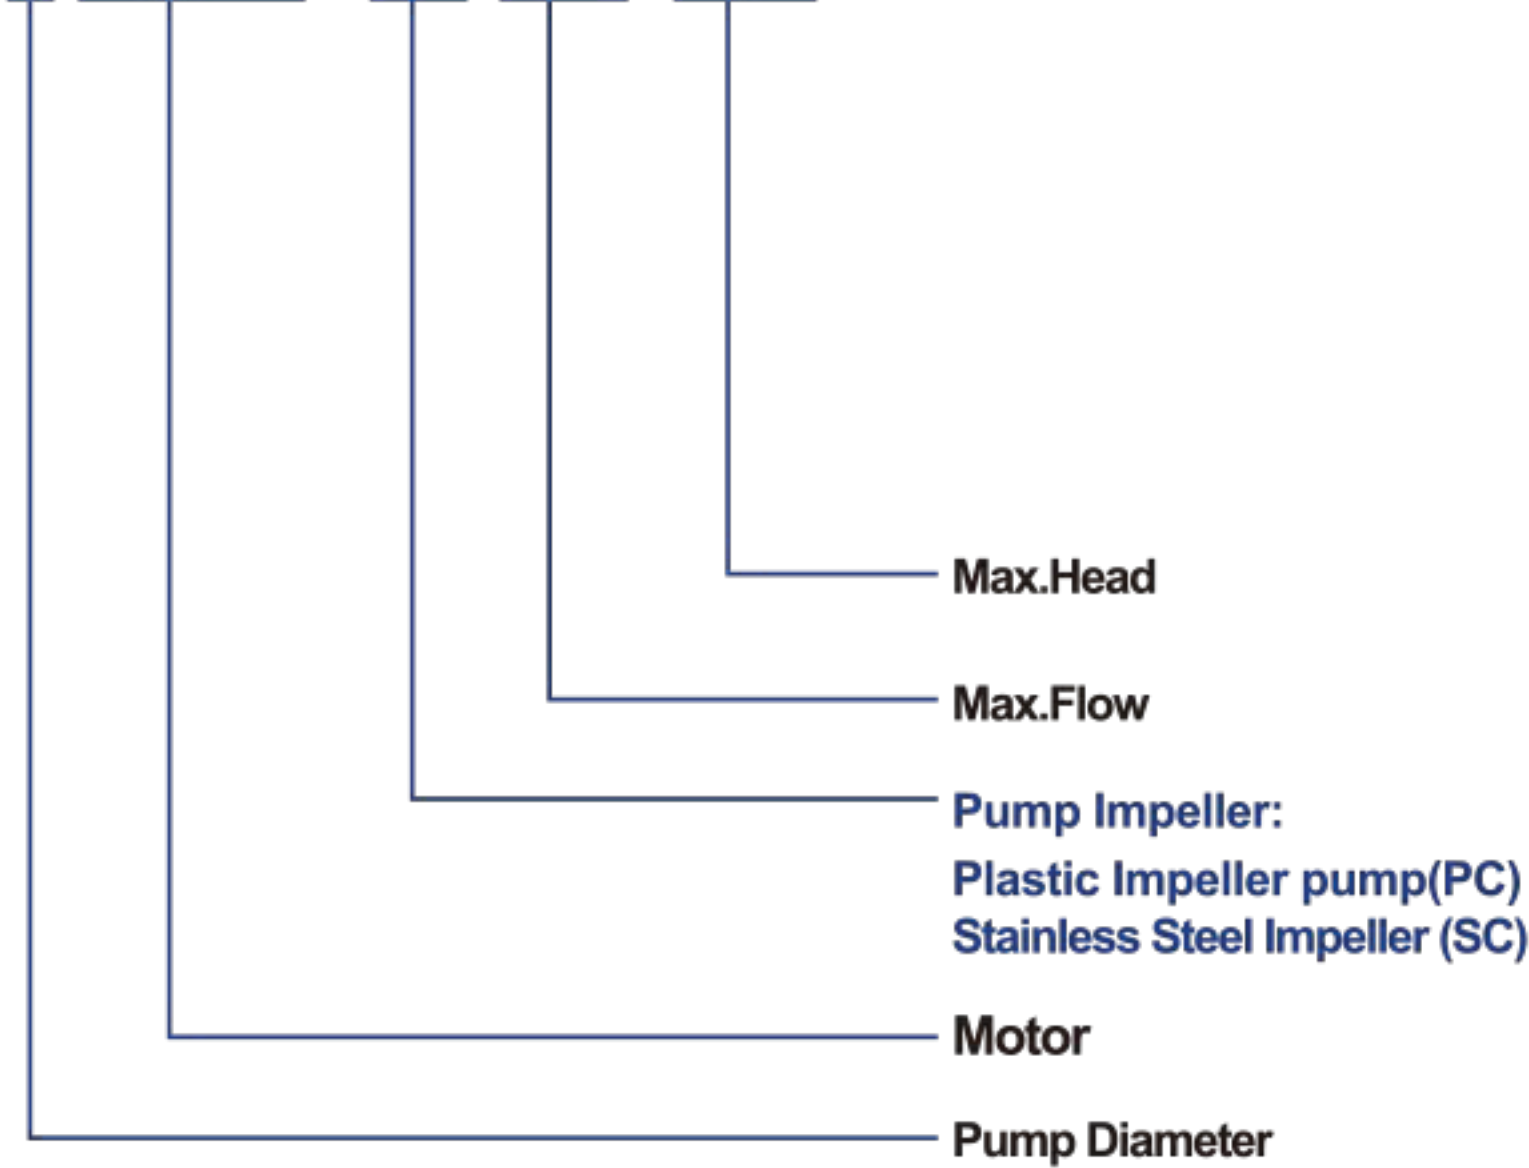

Applications

For water supply from wells or reservoirs
For domestic use,for civil and industrial applications
For garden use and irrigation

3" 4"Operating Conditions

Maximum fluid temperature up to +30℃
Maximum sand content : 0.25%
Minimum well diameter : 3" 4"

Motor and Pump

NEMA dimension standards

Plastic Impeller Pump (PC)

Components	Material
Pump external casing	AISI 304 SS
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	Plastic.PC
Impeller	Plastic.POM
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	① Cast-iron ② Cast-Cu ASTM C8850 ③ AISI 304 SS
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic)
Shaft	AIS I304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutic use.

Applications

For water supply from wells or reservoirs
For domestic use,for civil and industrial applications
For garden use and irrigation

4" 6"Operating Conditions

Maximum fluid temperature up to +50℃
Maximum sand content : 0.25%
Minimum well diameter : 4" 6"

Motor and Pump

NEMA dimension standards

Stainless Steel Impeller (SC)

Components	Material
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	AISI 304 SS
Impeller	AISI 304 SS
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	① Cast-iron ② Cast-Cu ASTM C8850 ③ AISI 304 SS
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutic use.

LCD Digital Screen

- Liquid Crystal Display
- Intuitive Interface
- Touch-key Design
- Error Code Memory
- Smart 7/24 Timer
- RS485 Control
- Real-Time Data



Air-Cool Design

"IP65 waterproof rating, equipped with air cooling fan, effectively enhances controller heat dissipation performance."



SOLAR SWIMMING POOL PUMP



Mechanical Seal: S silicon carbide + 316SS + Fluorine Rubber (Super Wear-Resistant)



Bearing: (BUT)2RS1 Made In UK



Motor Material: 50WW600 High Efficiency Heat Dissipation



Protection Class:IP55



Shaft: 316SS Food Grade Stainless Steel +40Cr Tempered Steel



Medium Temperature: ≤75°



Insulation Class:Class F



Motor Protection:Front And Rear Double Skeleton Sealing Structure




Junction box: Aluminum alloy flame retardant structure




Pump Body Material: PA Material (High Temperature Resistant)

TECHNICAL PARAMETERS

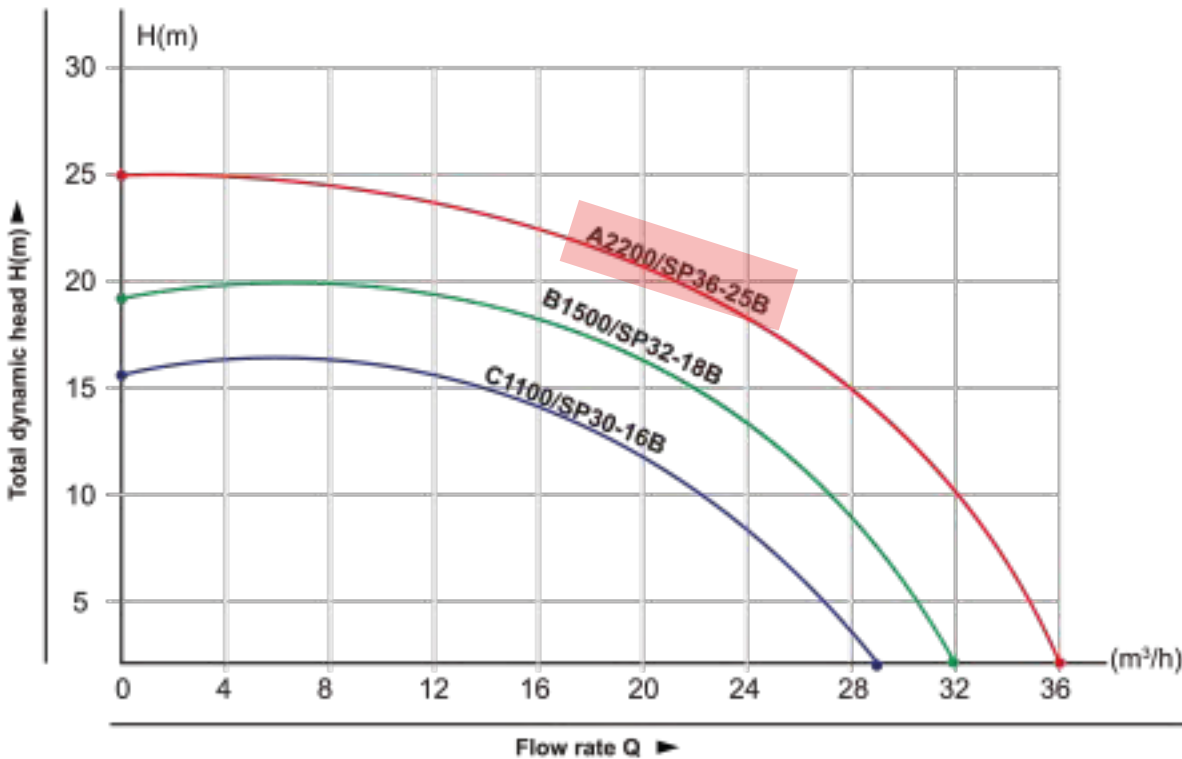


Model	Power	Motor Parameters	Max .Flow	Max.Head	Suction Distance	Pump Diameter	Pipe Size	Protection Level	Packing Size(mm)	Net/Gross Weight
A2200 SP36-25B	1100W	3300r/min	30m³/h	16m	4m	2"×2"	DN50	IP55	650*315*415	14 kg 21.7 kg
	1500W	3500r/min	32m³/h	18m						
	2200W	4000r/min	36m³/h	25m						

Note: The secondary pump can realize frequency conversion function through controller selection program.

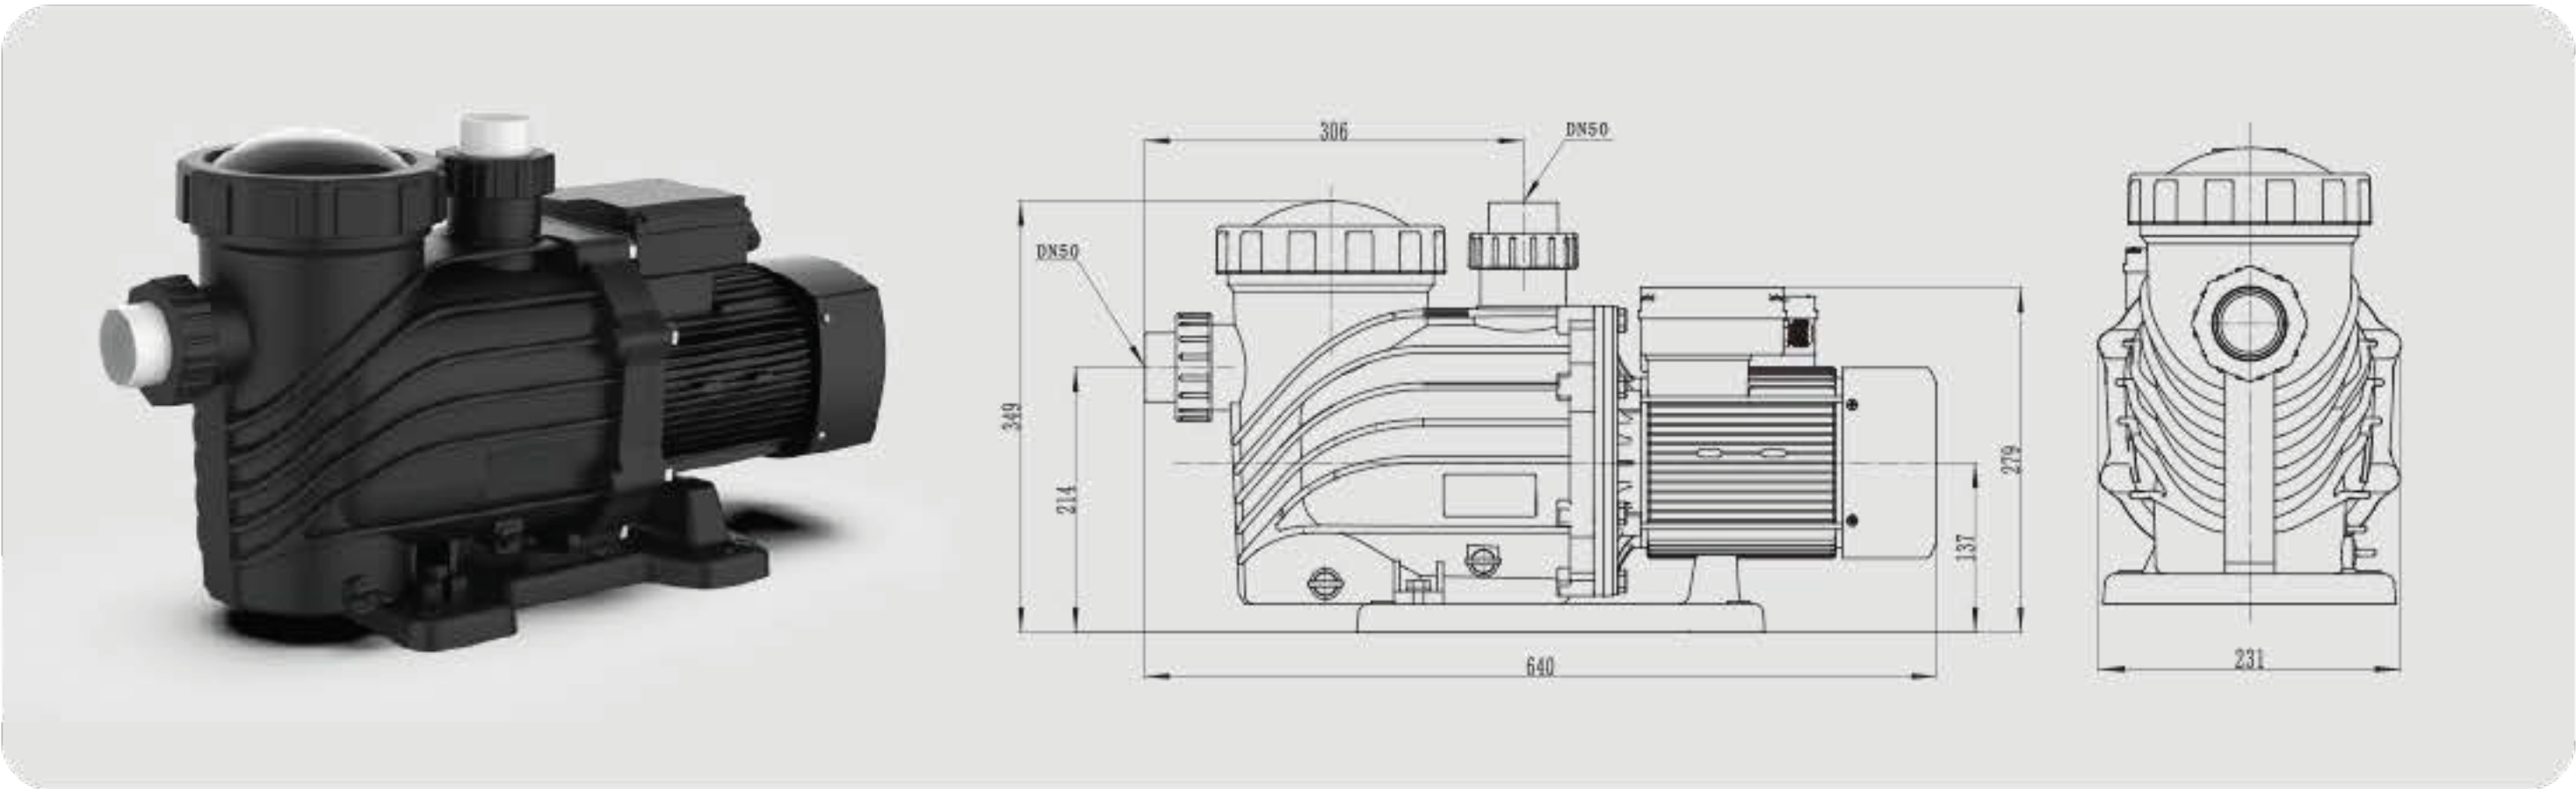

Controller Model	Power	Max.Power Max Speed	Program Name	AC Voltage Max Current	DC Voltage Max Current	Protection Level	Max Power	Operating Temperature	Packing Size(mm)	Net/Gross Weight
DY-B3000ACDC [Hybrid]	1100W	1700W	C1100	136-264V/15A	80V-410V/14A	IP65	3000W	-15 ~ 60℃	500*390*180	6.2 kg 7.73 kg
	1500W	2050W	B1500							
	2200W	2850W	A2200							

DY-B3000ACDC Wiring Diagram of Water Pump Controller

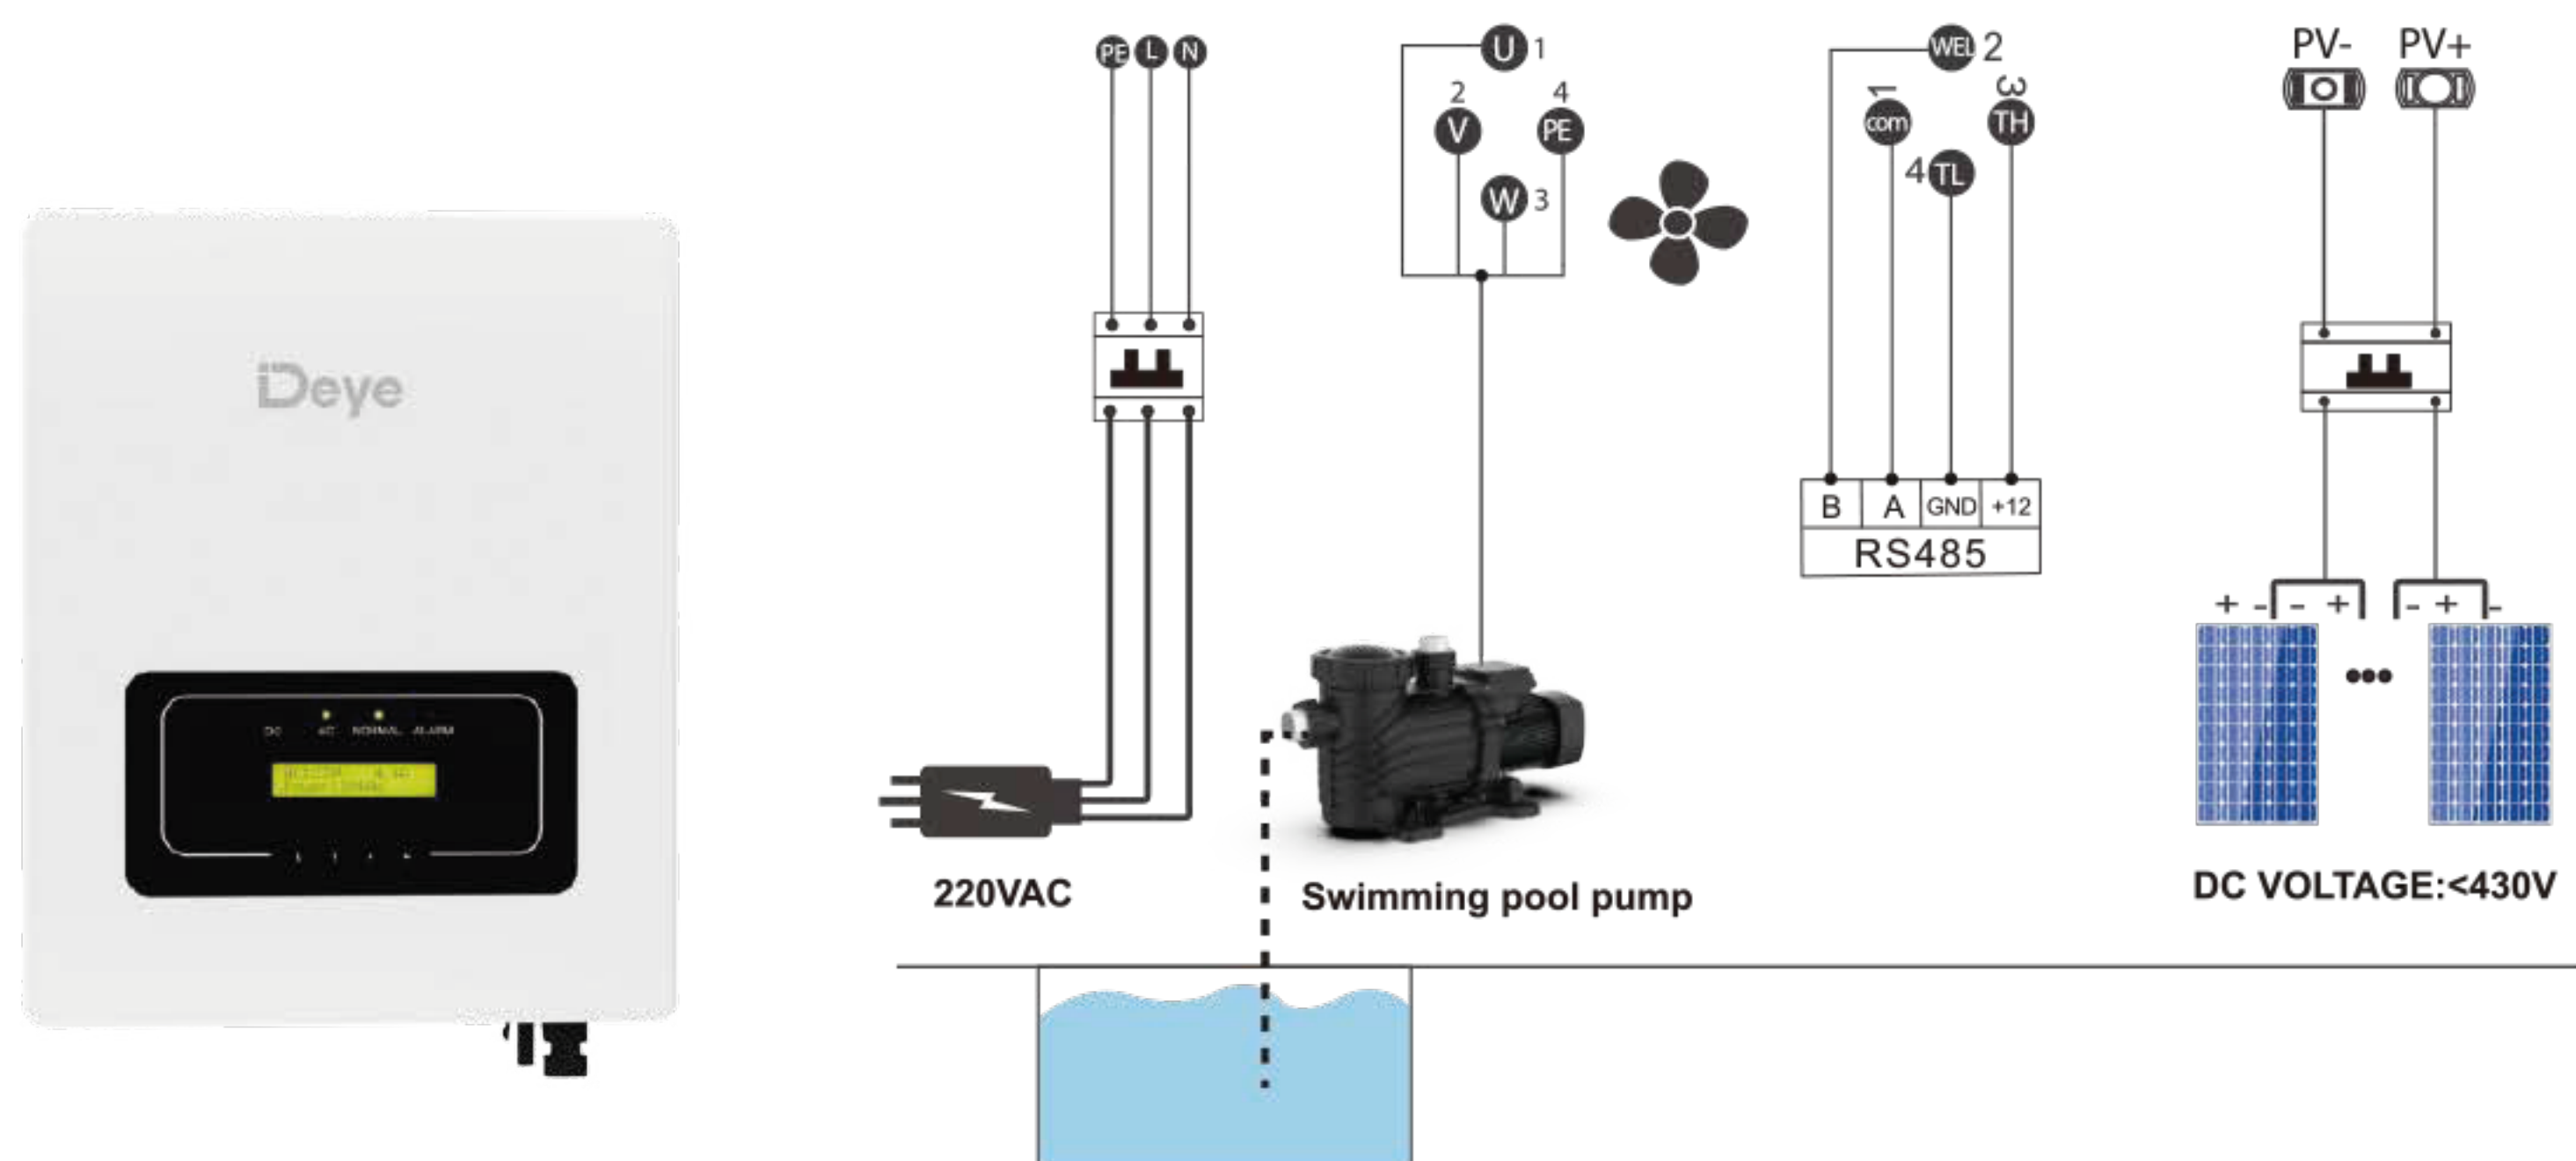

Technical Characteristics



Control Chip
Imported main control chip.



Smart Hybrid ACDC Auto Balance




Permanent Magnet Synchronous Motor
Position-free on field-oriented control



Wide Voltage Input
108-430V DC, 136-264V AC



Solar Power Input
Prioritize solar power



Solar Mppt
MPPT tracking technology



Digital Active PFC
Power Factor Up to 99.9%



Intelligent Protection on Motor Drive
Never-burn Machine



Built-in PV Leakage Protection Circuit
Safe and Reliable.



Wiring Convenience

605117
STOCK CODE

Deye



✉ solarac.sales@deye.com.cn ☎ 86-0574 6397 1382 🌐 www.deyesolar.com

📍 Zhejiang Deye Electrical Appliances Co., Ltd.No.889 Waitang Road, Haiyan, Jiaxing, Zhejiang, 314300 P.R.China