


605117
STOCK CODE

Deye

SOLAR WATER PUMP

PRODUCT SPECIFICATION SHEET

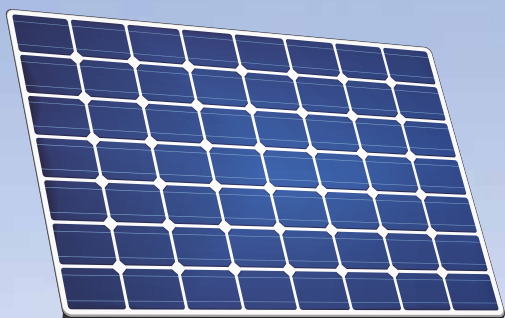


- 0.4-3.0Kw Submersible Solar Pump
- 1.1-2.2Kw Surface Solar Pump
- 1.1-2.2Kw Swimming Pool Solar Pump
- 5.5-13Kw High Speed Submersible Solar Pump



Controller Model	Pump Power (W)	DC Voltage Input Range (V)	Maximum DC Input Current (A)	AC Voltage Input Range (V)	Maximum AC Input Current (A)	Maximum Power Input (W)	Optimum Input Voltage (V)	Operation Mode	IP Rating	Operating Temperature Range (°C)	Net / Gross Weight (kg)
[Auto-switch] DY-D3600AC/DC	1100	80-430	20	136-264	24	1700	130-400	AC/DC Switching	IP65	-15 ~ 60	2.2 2.6
	1500					2050	160-400				
	2200					2850	220-400				
	3000					3000	280-400				

Auto-switch AC/DC Controller and Pump Wiring Diagram

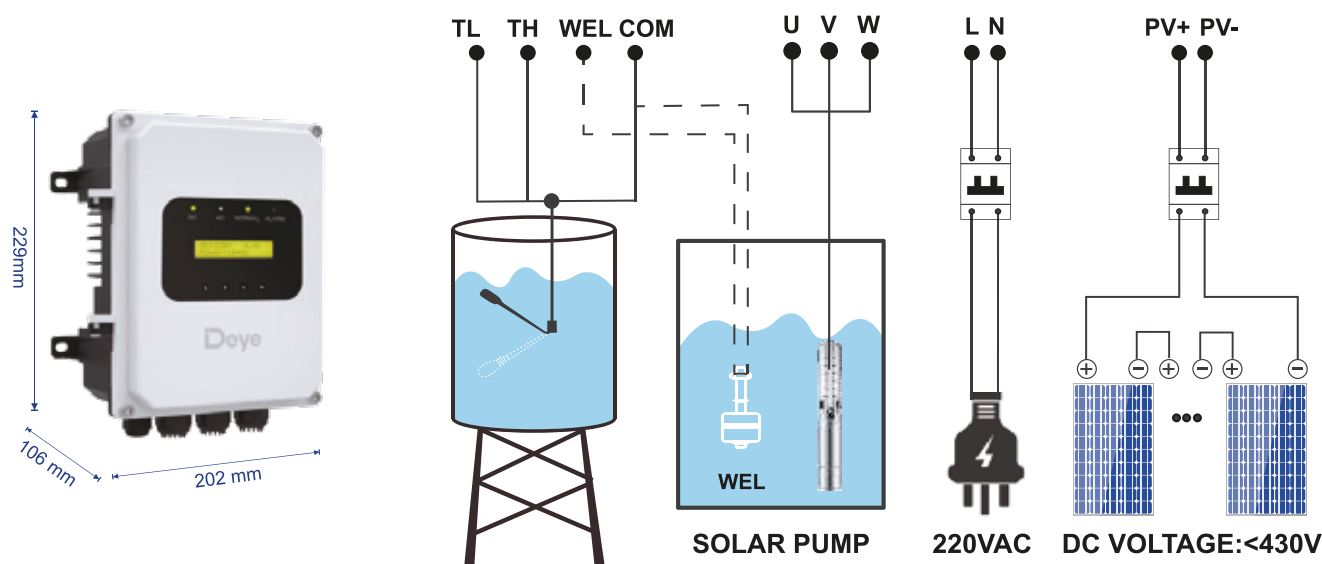

Technical Characteristics



Control Chip
Imported main control chip



Intelligent Protection on Motor Drive
Never-burn machine



Permanent Magnet Synchronous Motor
Position-free on field-oriented control



Wide Voltage Input
80~430V DC, 136~264V AC



Solar Power Input
Prioritize solar power



Solar MPPT
MPPT tracking technology



Real-Time Data Model
Real-time data monitoring, optimizing the system



Error Code Memory
Error reporting, storing fault code history, simplifying troubleshooting



Smart 7/24 Timer
Automation and energy saving



Liquid Crystal Display
Enhanced user convenience and experience

Hybrid ACDC

SWIMMING POOL SOLAR PUMP



Hybrid ACDC



Solar MPPT



SVPWM



Digital PFC



LCD Display




IP65



Smart Motor



RS485

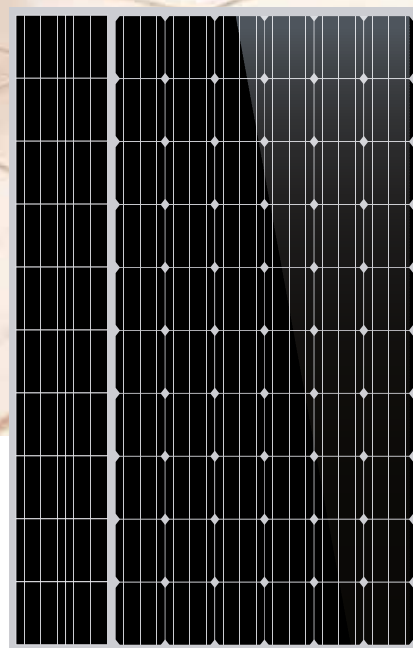



Mechanical Seal: S silicon carbide + 316SS + Fluorine Rubber (Super Wear-Resistant)



Bearing: (BUT)2RS1 Made In UK



Motor Material: 50WW600 High Efficiency Heat Dissipation



Protection Class: IP55



Shaft: 316SS Food Grade Stainless Steel +40Cr Tempered Steel



Medium Temperature: ≤75°



Insulation Class: Class F




Motor Protection: Front And Rear Double Skeleton Sealing Structure



Junction box: Aluminum alloy flame retardant structure



Pump Body Material: PA Material (High Temperature Resistant)

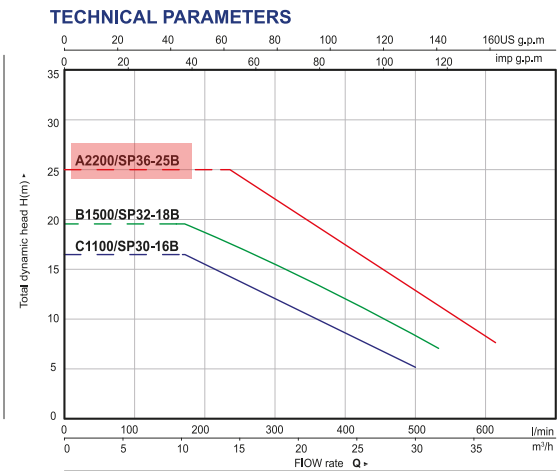

SP TECHNICAL DATE

Model	Power (W)	Q	m³/h	0	4	8	12	16	20	24	28	32	36
			l/min	0	67	133	200	267	333	400	467	533	600
			US.GPM	0	18	35	53	70	88	106	123	141	159
A2200 SP36-25B	1100	H(m)		16	16	16	16	14	12	9	5		
	1500			18	18	18	18	16	14	11	9	6	
	2200			25	24	24	23	22	21	19	15	10	6

DIMENSIONS AND WEIGHTS

Model	Power (W)	Controller		Motor Parameters (r/min)	Max.Flow (m³/h)	Max.Head (m)	Suction Distance (m)	Pump Diameter	Pipe Size	Packing Size (mm)	Net / Gross Weight (kg)
A2200 SP36-25B	1100	DY-B3000ACDC	DY-D3600AC/DC	3300	30	16	4	2"x2"	DN50	650*315*415	14
	1500	DY-B3000ACDC	DY-D3600AC/DC	3500	32	18					21.7
	2200	DY-B3000ACDC	DY-D3600AC/DC	4000	36	25					

Note: The secondary pump can realize frequency conversion function through controller selection program.

