

605117
STOCK CODE

Deye

SOLAR WATER PUMP

PRODUCT SPECIFICATION SHEET




- 0.4-3.0Kw Submersible Solar Pump
- 1.1-2.2Kw Surface Solar Pump
- 1.1-2.2Kw Swimming Pool Solar Pump
- 5.5-13Kw High Speed Submersible Solar Pump



Controller Model	Pump Power (W)	DC Voltage Input Range (V)	Maximum DC Input Current (A)	AC Voltage Input Range (V)	Maximum AC Input Current (A)	Maximum Power Input (W)	Optimum Input Voltage (V)	Operation Mode	IP Rating	Operating Temperature Range (°C)	Net / Gross Weight (kg)
[Auto-switch] DY-D3600AC/DC	1100	80-430	20	136-264	24	1700	130-400	AC/DC Switching	IP65	-15 ~ 60	2.2 2.6
	1500					2050	160-400				
	2200					2850	220-400				
	3000					3000	280-400				

Auto-switch AC/DC Controller and Pump Wiring Diagram

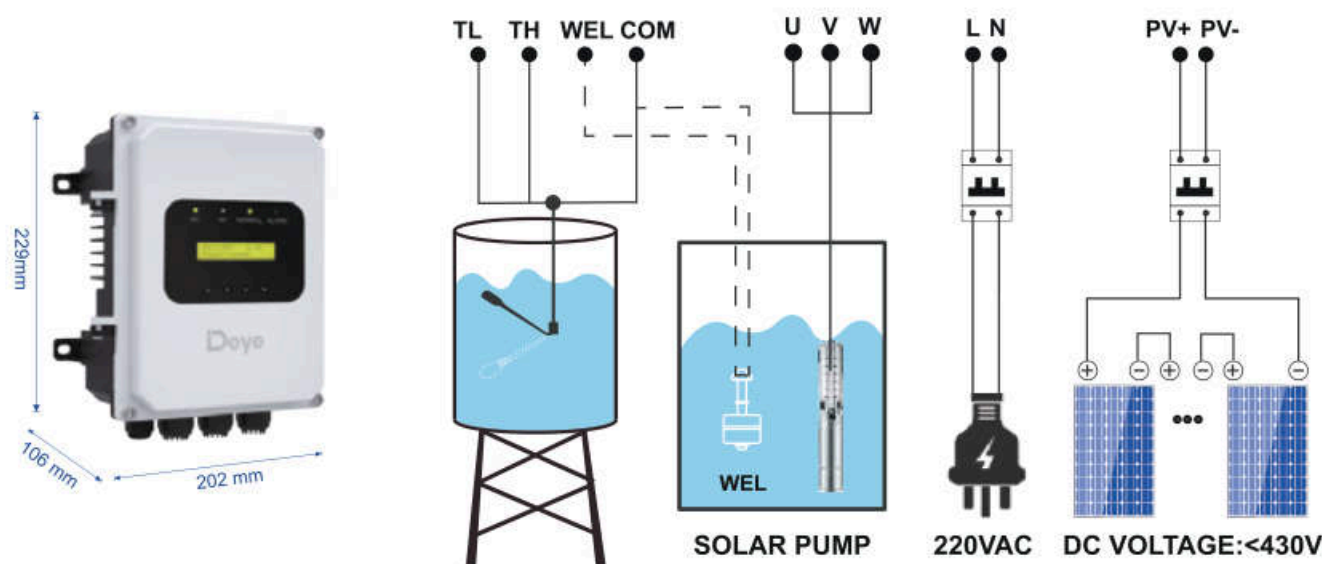

Technical Characteristics



Control Chip
Imported main control chip



Intelligent Protection on Motor Drive
Never-burn machine



Permanent Magnet Synchronous Motor
Position-free on field-oriented control



Wide Voltage Input
80~430V DC, 136~264V AC



Solar Power Input
Prioritize solar power



Solar MPPT
MPPT tracking technology



Real-Time Data Model
Real-time data monitoring, optimizing the system



Error Code Memory
Error reporting, storing fault code history, simplifying troubleshooting




Smart 7/24 Timer
Automation and energy saving



Liquid Crystal Display
Enhanced user convenience and experience

3 C1100 / PC 4.5 - 165

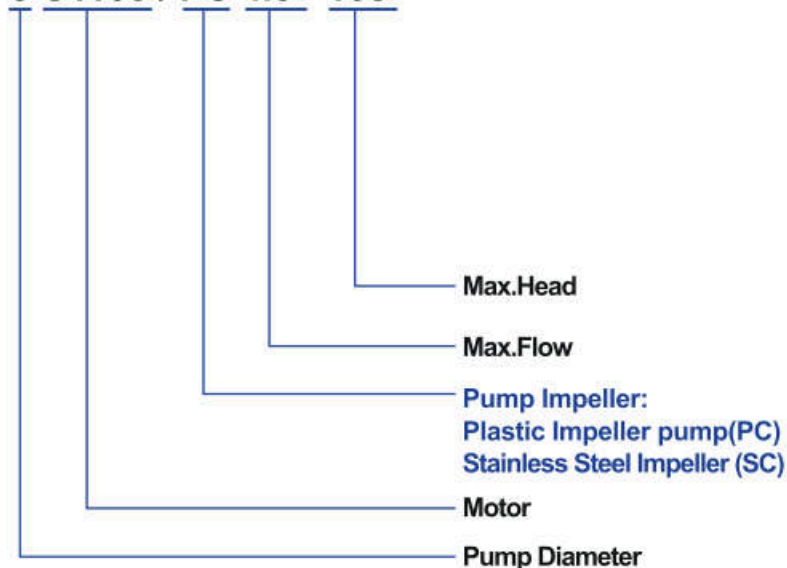

**Plastic
(PC)**

**Stainless steel
(SC)**

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

3" 4" Operating Conditions

Maximum fluid temperature up to +30°C

Maximum sand content : 0.25%

Minimum well diameter : 3" 4"

Motor and Pump

NEMA dimension standards

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

4" 6" Operating Conditions

Maximum fluid temperature up to +50°C

Maximum sand content : 0.25%

Minimum well diameter : 4" 6"

Motor and Pump



NEMA dimension standards

Plastic Impeller Pump (PC)

Components	Material
Pump external casing	AISI 304 SS
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	Plastic.PC
Impeller	Plastic.POM
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	① Cast-iron ② Cast-Cu ASTM C8850 ③ AISI 304 SS
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

Stainless Steel Impeller (SC)

Components	Material
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	AISI 304 SS
Impeller	AISI 304 SS
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	① Cast-iron ② Cast-Cu ASTM C8850 ③ AISI 304 SS
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

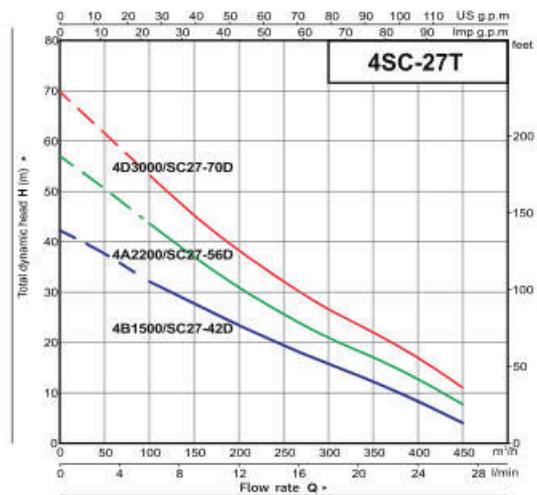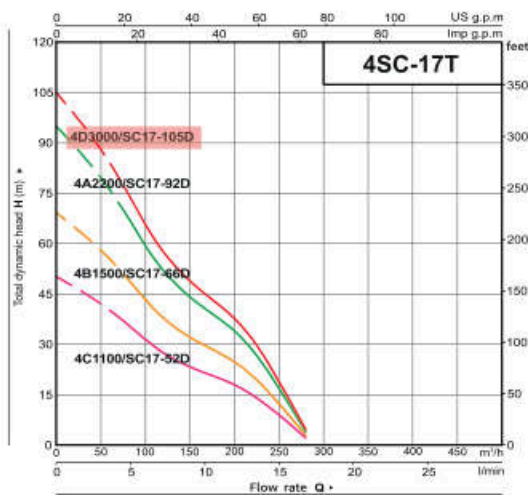

4SC-17T TECHNICAL DATE

Model	Power (W)	Voltage (V)	DELIVERY n_{max}=4500r/min										
			Q	m³/h	0	2.4	4.8	7.2	9.6	10.8	12.0	14.4	16.8
				l/min	0	40	80	120	160	180	200	240	280
4C1100/SC17-52D	1100	130~200	H(m)		52	50	43	34	28	24	21	13	5
4B1500/SC17-66D	1500	160~240			66	62	55	44	36	33	29	19	9
4A2200/SC17-92D	2200	220~400			92	88	76	61	50	44	39	27	11
4D3000/SC17-105D	3000	280~400			105	104	86	81	70	52	55	40	26

DIMENSIONS AND WEIGHTS

P= PUMP BODY M= MOTOR T= WATER PUMP

Model	Controller		Max.Outside Diameter	DN	Dimension (mm)			Weight (kg)		
					P	M	T	P	M	T
4C1100/SC17-52D	DY-D2000DC		100mm	2"	366	284	650	4.1	6.3	10.4
4B1500/SC17-66D	DY-D2000DC	DY-D3600AC/DC			408	309	717	4.4	7.3	11.7
4A2200/SC17-92D	DY-D2000DC	DY-D3600AC/DC			492	329	821	5.1	8.0	13.1
4D3000/SC17-105D	DY-D3600AC/DC				541	329	870	5.4	8.0	13.4

4SC-27T TECHNICAL DATE

Model	Power (W)	Voltage (V)	DELIVERY n_{max}≈4500r/min										
			Q	m³/h	0	3.0	6.0	9.0	12	15	18	20	24
				l/min	0	50	100	150	200	250	300	333	400
4B1500/SC27-42D	1500	160~240	H(m)		42	41	34	29	24	20	16	13	6
4A2200/SC27-56D	2200	220~400			56	55	49	40	34	28	23	18	10
4D3000/SC27-70D	3000	280~400			70	68	65	54	48	37	33	25	17

DIMENSIONS AND WEIGHTS

P= PUMP BODY M= MOTOR T= WATER PUMP

Model	Controller		Max.Outside Diameter	DN	Dimension (mm)			Weight (kg)		
					P	M	T	P	M	T
4B1500/SC27-42D	DY-D2000DC	DY-D3600AC/DC	100mm	2"	349	309	658	4.5	7.3	11.8
4A2200/SC27-56D	DY-D3600AC/DC				399	329	728	4.9	8.0	12.9
4D3000/SC27-70D	DY-D3600AC/DC				455	329	784	5.3	8.0	13.3