

SOLAR WATER PUMP

Hybrid ACDC / Pure DC

CE CB



Hybrid Acdc



Solar Mppt



SVPWM Control



Digital PFC



IP65



LCD Display



RS485



Smart Power Meter




Pure DC Solar Water pump

DC Solar Water Pump Controller Specifications

Controller Model	DC Specs				Full Unit Specs				
	Pump model	DC voltage input range(V)	Maximum DC input current(A)	Maximum DC Power input(W)	Integration Type	IP Rating	Operating TEMP Range (°C)	Net weight	Gross Weight
DY-D900DC	F0600	30-110	18	900	/	IP65	-15 -60	1.5kg	1.68kg
DY-D1500DC	E0800	60-220		1200					
	C1100			1700					
	B1500			2050					

DC SOLAR CONTROLLER WIRING DIAGRAM OF WATER PUMP CONTROLLER

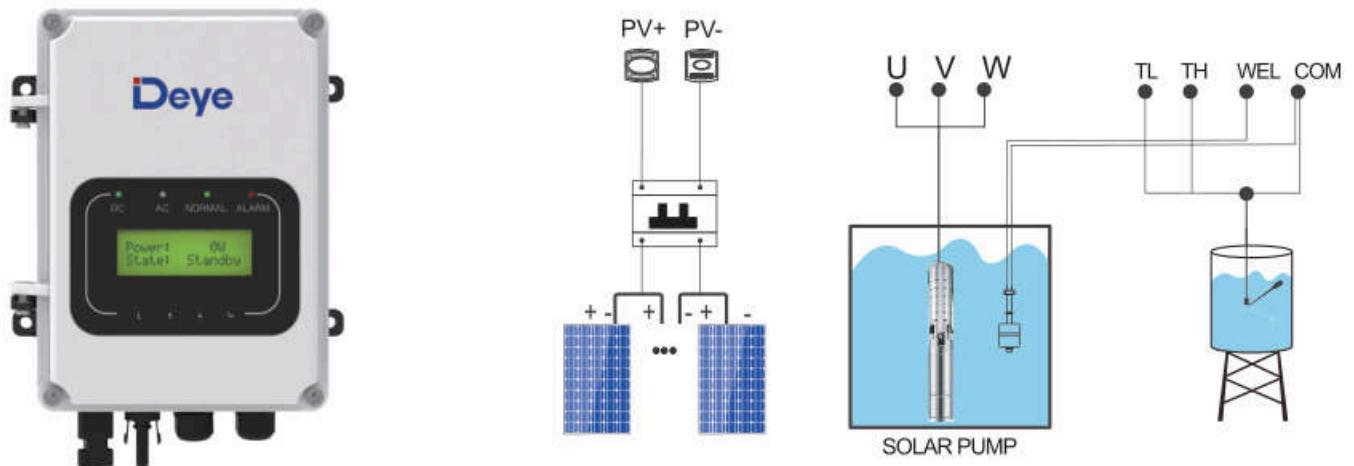

Technical characteristics



Solar Pure
Solar Pure DC input.



Maximum Input
Maximum input current 17A



Controller
Working environment humidity 30% -90%



Automatic Shutdown
Automatic shutdown when the water tank is full



Water Shortage Protection
Direct Current Reverse Protection and indicator light reminder.



Timed Detection
Regular incoming water detection



DC Reverse Connection Protection
Connection Protection And indicator light reminder



Solar MPPT
MPPT tracking technology



Permanent Magnet Synchronous Motor
Position-Free on Field-Oriented Control



Six Protection Functions
Overhigh/low voltage, Overcurrent low speed, Open phase, start operation, anti-reverse connection.

STAINLESS STEEL IMPELLER (SC)



PERFORMANCE DATA 4SC Maximum Flow ~ 7 m³/h

MODEL	Controller Model		Pump Power	DN	Max outside diameter(mm)	Gross Weight (kg)	Pump packing size (mm)	Q	m³/h	0	3.6	4.5	6.9
									l/min	0	60	75	115
4E800/SC7-72	DY-D3000ACDC	DY-D1500DC	800W	1.5"	100	8.8	100x108x675	H(m)	72	46	36	9	
4C1100/SC7-102	DY-D3000ACDC	DY-D1500DC	1100W			10.4	100x108x730		102	68	55	12	
4B1500/SC7-160	DY-D3000ACDC	DY-D1500DC	1500W			12.4	100x108x840		160	90	70	15	
4A2200/SC7-220	DY-D3000ACDC	/	2200W			14.4	100x108x940		220	128	100	20	

PERFORMANCE DATA 4SC Maximum Flow ~ 11 m³/h

MODEL	Controller Model		Pump Power	DN	Max outside diameter(mm)	Gross Weight (kg)	Pump packing size (mm)	Q	m³/h	0	6.0	7.2	9.6
									l/min	0	100	120	160
4E800/SC11-58	DY-D3000ACDC	DY-D1500DC	800W	1.5"	100	8.7	100x108x660	H(m)	58	27	21	6	
4C1100/SC11-70	DY-D3000ACDC	DY-D1500DC	1100W			9.8	100x108x690		70	41	34	17	
4B1500/SC11-104	DY-D3000ACDC	DY-D1500DC	1500W			11.3	100x108x750		104	62	51	28	
4A2200/SC11-145	DY-D3000ACDC	/	2200W			12.9	100x108x840		145	81	65	30	

PERFORMANCE DATA 4SC Maximum Flow ~ 17 m³/h

MODEL	Controller Model		Pump Power	DN	Max outside diameter(mm)	Gross Weight (kg)	Pump packing size (mm)	Q	m³/h	0	9.6	12.0	16.8
									l/min	0	160	200	280
4C1100/SC17-52	DY-D3000ACDC	DY-D1500DC	1100W	2"	100	11.4	100x108x800	H(m)	52	28	21	5	
4B1500/SC17-66	DY-D3000ACDC	DY-D1500DC	1500W			12.7	100x108x860		66	36	29	9	
4A2200/SC17-92	DY-D3000ACDC	/	2200W			14.8	100x108x960		99	50	39	11	

PERFORMANCE DATA 4SC Maximum Flow ~ 27 m³/h

MODEL	Controller Model		Pump Power	DN	Max outside diameter(mm)	Gross Weight (kg)	Pump packing size (mm)	Q	m³/h	0	15	18	24
									l/min	0	250	300	400
4B1500/SC27-42	DY-D3000ACDC	DY-D1500DC	1500W	2"	100	11.7	100x108x800	H(m)	42	20	16	6	
4A2200/SC27-56	DY-D3000ACDC	/	2200W			13.2	100x108x870		56	28	23	10	

PERFORMANCE DATA 4SC Maximum Flow ~ 36 m³/h

MODEL	Controller Model		Pump Power	DN	Max outside diameter(mm)	Gross Weight (kg)	Pump packing size (mm)	Q	m³/h	0	23	25	33
									l/min	0	383	417	550
6B1500/SC36-30	DY-D3000ACDC	DY-D1500DC	1500W	3"	145	12	142x154x780	H(m)	30	14	13	8	
6A2200/SC36-52	DY-D3000ACDC	/	2200W			16.6	142x154x850		52	22	19	10	

