


TECHNICAL SPECIFICATIONS

Model	TRIRON 1206N	TRIRON 2206N	TRIRON 1210N	TRIRON 2210N	TRIRON 3210N	TRIRON 4210N	TRIRON 3215N	TRIRON 4215N
System nominal voltage	12/24VDC Auto①							
Rated charge current	10A	20A	10A	20A	30A	40A	30A	40A
Rated discharge current	10A	20A	10A	20A	30A	40A	30A	40A
Battery input voltage range	8~32V							
Max. PV open circuit voltage	60V② 46V③		100V② 92V③				150V② 138V③	
MPP voltage range	(Battery voltage +2V)~36V		(Battery voltage +2V)~72V				(Battery voltage +2V)~108V	
Rated charge Power	130W/12V 260W/24V	260W/12V 520W/24V	130W/12V 260W/24V	260W/12V 520W/24V	390W/12V 780W/24V	520W/12V 1040W/24V	390W/12V 780W/24V	520W/12V 1040W/24V
Equalize charging voltage※	Sealed: 14.6V, Flooded: 14.8V, User-defined: 9~17V							
Boost charging voltage※	Gel: 14.2V, Sealed: 14.4V, Flooded: 14.6V, User-defined: 9~17V							
Float charging voltage※	Gel /Sealed /Flooded: 13.8V, User-defined: 9~17V							
Low voltage reconnect voltage※	Gel /Sealed /Flooded: 12.6V, User-defined: 9~17V							
Low voltage disconnect voltage※	Gel /Sealed /Flooded: 11.1V, User-defined: 9~17V							
Grounding	Common negative							
Self-consumption	≤14mA(12V); ≤15mA(24V)						≤15mA(12V); ≤10mA(24V)	
Temp. compensation④	-3mV/℃/2V (Default)							
Dimension	135×180.8×47.3	150×216×56.7	135×180.8×47.3	150×216×56.7	158×238.3×62.7	183×256.8×66.7		
Net weight	0.56kg	0.92kg	0.56kg	0.92kg	1.35kg	1.85kg		
Enclosure	IP30							
Working environment temperature	-25℃~-+55℃(LCD) -30℃~-+55℃ (No LCD)						-25℃~-+50℃(LCD) -30℃~-+50℃ (No LCD)	
Relative humidity	≤95%, N.C							

①When a lithium battery is used, the system voltage can't be identified automatically.
②At minimum operating environment temperature.
③At 25℃ environment temperature.
④When a lithium battery is used, the temperature compensate coefficient will be 0,and can't be changed.
※Technical data for 12V system at 25℃, twice in 24V system.
※Programmable voltage value by PC , MT50 and APP.

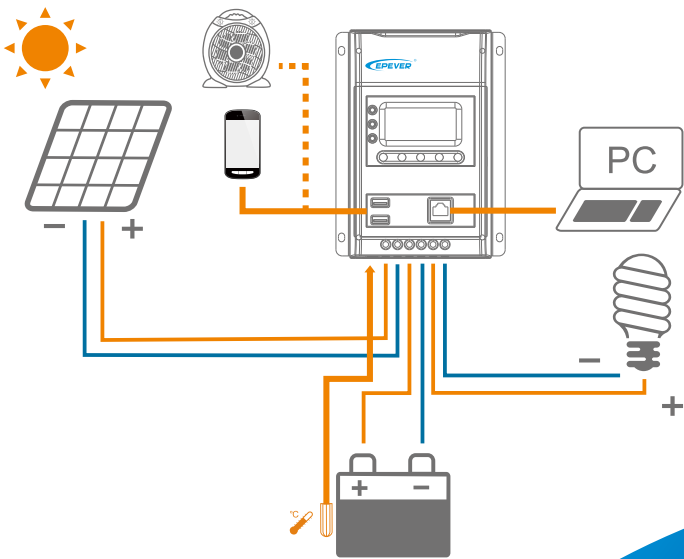

All product specifications are subject to change without notice.

TRIRON series
MPPT solar charge controller

TRIRON series adopt modular design based on MPPT solar charge controller.The controller is composed of MPPT solar charge controller and different display modules (LED, LCD) , interface modules (Relay, USB and RS485). The controller can recognize and load the modules driver automatically. Customers can choose the modules according to different application. It can be widely used in communication station system, household system and monitoring system,etc.

FEATURES

- Self-identifying, load the driver for each module
- Modular design, varied combination to meet different requirements
- LCD, LED, Relay, USB or RS485 modules optional
- Advanced MPPT technology, tracking efficiency no less than 99.5%
- Peak conversion efficiency of 98%
- Accurately recognizing and tracking of multiple power points
- Multiple load work modes
- Common negative grounding
- Compatible with lead-acid batteries and lithium batteries
- RS485 port with industrial standard MODBUS open architecture
- Real-time energy statistics
- Relay design realize the perfect combination of inverter and controller

ELECTRONIC PROTECTIONS

- PV over current protection
- PV short circuit protection
- PV reverse polarity protection
- Battery over voltage protection
- Battery over discharge protection
- Battery reverse polarity protection
- Battery overheating protection
- Load overload protection
- Load short circuit protection
- Controller overheating protection

Application



PRODUCT FAMILY

TRIRON1206N
TRIRON2206N
TRIRON2210N
TRIRON3210N
TRIRON4210N
12/24V
10A,20A,30A,40A

LED module

LCD module

Relay/ RS485 module

USB/ RS485 module

CC-USB-RS485-150U
PC communication cable (1.5m)

RTS300R47K3.81A
Remote temperature sensor

PC software