



PWM Solar Charge Controller PC1500B Series

Feature:

- 10A 20A 30A 40A 50A 60A solar charge controller
- Vivid LCD graphic symbols
- Simple button operation
- Automatic identification of system voltage level
- Intelligent PWM charging mode
- Adjustable charge-discharge protection
- Automatic temperature compensation Settable
- operation mode of load
- Battery reverse-discharge protection
- Battery low voltage disconnection(LVD) Battery
- reverse connection protection
- Over current protection
- USB output

Introduction:


This intelligent, multi-purpose solar charge and discharge controller has a very friendly interface of fixed LCD display. Various control parameters can be flexibly set, fully meet your various application requirements.

LCD Display Information




1. PV array positive terminal
2. Battery positive terminal
3. The load positive terminal
4. LCD display

Solar System Connection

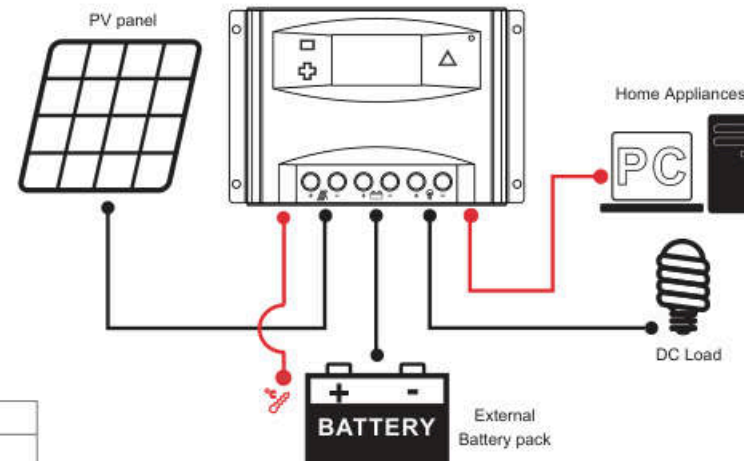


Functions:

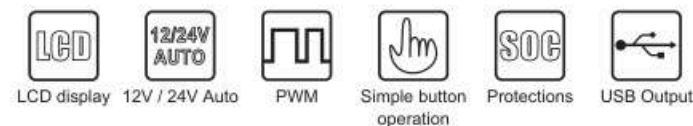

Inner Details



Stability, high efficiency, high integration



Optimized circuit design



SCM accurate control



Selection of quality materials

PC1500B SERIES Controllers



Model: PC1500B-20A



Rated Voltage: 12V/24V Auto identified
Rated Current: 20A
USB Port: 5V, 1A x 2

Packing info: 30pcs / carton
Carton size: 535mm x 425mm x 200mm
Gross weight: 12Kg
Volume: 0.045m³



Model: PC1500B-30A



Rated Voltage: 12V/24V Auto identified
Rated Current: 30A
USB Port: 5V, 1A x 2
LCD screen size: 2.2"

Packing info: 30pcs / carton
Carton size: 535mm x 425mm x 200mm
Gross weight: 12Kg
Volume: 0.045m³



Model: PC1500B-40A/50A/ 5048A

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 40A, 50A

LCD screen size: 2.6"
Temperature sensor port: x1
Communication port: RJ45 (Optional)

Packing info: 24pcs / carton
Carton size: 545mm x 425mm x 205mm
Gross weight: 14Kg
Volume: 0.047m³



Model: PC1500B-60A / 6048A

Rated Voltage: 12V/24V Auto identified or 48V
Rated Current: 60A

LCD screen size: 2.6"
Temperature sensor port: x1
Communication port: RJ45 (Optional)

Packing info: 24pcs / carton
Carton size: 545mm x 425mm x 205mm
Gross weight: 17Kg
Volume: 0.047m³

Application



RV, boat & field power supply solar system



Off-grid home solar system



Farm solar generation system

Model		PC1500B-10A	PC1500B-15A	PC1500B-20A	PC1500B-30A	PC1500B-40A	PC1500B-50A	PC1500B-60A
Input								
Maximum PV open circuit voltage		<50V					<50V(<100V)	
System voltage		12V/24V Auto					12V/24V/(48V) Auto	
Rated Charge Current		10A	15A	20A	30A	40A	50A	60A
PV maximum input power	12V	130W	195W	260W	390W	520W	650W	780W
	24V	260W	390W	520W	780W	1040W	1300W	1560W
	48V						2600W	3120W
Rated Discharge Current		10A		10A	20A		30A	
Charging control mode		PWM						
Float charge		13.8V/27.6V/(55.2V)						
Absorption charge		14.4V/28.8V/(57.6V)						
Equalization charge		14.6V/29.2V/(58.4V)						
Load disconnection(LVD)		10.8V/21.6V/(43.2V)						
Load reconnection(LVR)		12.6V/25.2V/(50.4V)						
Working temperature range		-20~+55℃						
Temperature Compensation		-24mV/℃ for 12V system						
Battery Type		GEL, SLD,FLD Lithium batteries customization			GEL, SLD,FLD			
Load control mode		24 hours work, light control, light and timing control						