



PWM Solar Charge Controller
PC1500A Series


Feature:

- 10A 20A 30A 40A 50A 60A solar charge controller
- Vivid LCD graphic symbols
- Simple button operation
- Automatic identification of system voltage level
- Intelligent PWM charging mode
- Adjustable charge-discharge protection
- Automatic temperature compensation
- Settable operation mode of load
- Battery reverse-discharge protection
- Battery low voltage disconnection(LVD)
- Battery reverse connection protection
- Over current protection
- USB output

Introduction:

This intelligent,multi-purpose solar charge and discharge controller has a very friendly interface of fixed LCD display. Various control parameters can be flexibly set, fully meet your various application requirements.

Functions:

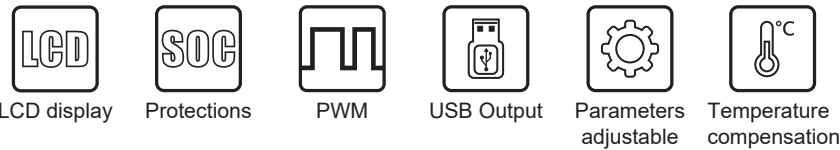

PC1500A SERIES Controllers

			
Model: PC1500A-10A/20A	Model: PC1500A-30A/40A	Model: PC1500A-50A	Model: PC1500A-60A
			
Rated Voltage:12V/24V Auto identified Rated Current: 10A/20A USB Port: 5V, 2A x 1 Product size: 136mm x 85mm x 33mm	Rated Voltage:12V/24V/48V Optional Rated Current: 30A/40A USB Port: 5V, 2A x 1 Product size: 162mm x 96mm x 38mm	Rated Voltage:12V/24V/48V Optional Rated Current: 50A USB Port: 5V, 2A x 1 Product size: 176mm x 103mm x 43mm	Rated Voltage:12V/24V/48V Optional Rated Current: 60A USB Port: 5V, 2A x 1 Product size: 190mm x 110mm x 50mm
Packing info: 50pcs / carton Product size: 470mm x 320mm x 220mm Gross weight: 12Kg Volume: 0.03CBM	Packing info: 40pcs / carton Product size: 475mm x 375mm x 230mm Gross weight: 14Kg Volume: 0.04CBM	Packing info: 40pcs / carton Product size: 570mm x 400mm x 205mm Gross weight: 15.3Kg Volume: 0.05CBM	Packing info: 30pcs / carton Product size: 440mm x 380mm x 300mm Gross weight: 17Kg Volume: 0.05CBM

Application



RV, boat & field power supply
solar system



Off-grid
home solar system



Farm solar generation system

PWM Product display

Model		PC1500A -10A	PC1500A -20A	PC1500A -30A	PC1500A -40A	PC1500A -50A	PC1500A -60A	PC1500A -5048	PC1500A -6048
Input									
Maximum PV open circuit voltage		<50V		<50V(<100V)					
System voltage		12V/24V Auto		12V/24V/(48V)Auto					
Rated Charge Current		10A	20A	30A	40A	50A	60A	50A	60A
PVmaximum input power	12V	130W	260W	390W	520W	650W	780W	650W	780W
	24V	260W	520W	780W	1040W	1300W	1560W	1300W	1560W
	48V			1560W				2600W	3120W
Rated Discharge Current		10A		20A		40A		40A	
Charging control mode		PWM							
Float charge		13.8V/27.6V/(55.2V)							
Absorption charge		14.4V/28.8V/(57.6V)							
Equalization charge		14.6V/29.2V/(58.4V)							
Load disconnection(LVD)		10.8V/21.6V/(43.2V)							
Load reconnection(LVR)		12.6V/25.2V/(50.4V)							
Working temperature range		-20~+55℃							
System voltage		24mV/℃ for 12V system							
Battery Type		GEL, SLD,FLD Lithium batteries customization				GEL, SLD,FLD			
Load controlmode		24 hours work,light control,light and timing control							