


Three Phase String Inverter(LV)

SUN-60/70/75K-G01P3-EU-AM8-LV

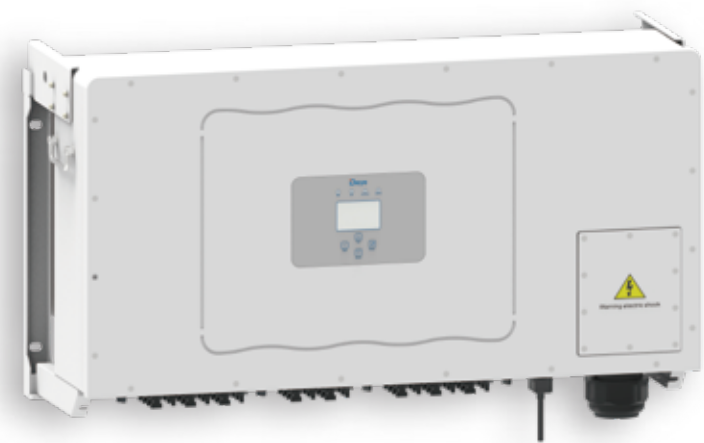

- LV** 127/220Vac, 133/230Vac and 60/50Hz, Three phase system
- 8M** 8 MPP trackers, Max. efficiency up to 98.8%
- F** Zero export application, VSG application
- String** String intelligent monitoring (optional)
- Wide** Wide output voltage range
- PID** Anti-PID function (Optional)

Technical Data

Model	SUN-60K-G01P3-EU-AM8-LV		SUN-70K-G01P3-EU-AM8-LV	SUN-75K-G01P3-EU-AM8-LV
Input Side				
Max. DC Input Power (kW)	90	105	112.5	
Max. DC Input Voltage (V)	800			
Start-up DC Input Voltage (V)	250			
MPPT Operating Range (V)	200-700			
Max. DC Input Current (A)	40+40+40+40+40+40+40+40			
Max. Short Circuit Current (A)	60+60+60+60+60+60+60+60			
No.of MPP Trackers	8			
No.of Strings per MPP Tracker	4+4+4+4+4+4+4+4			
Output Side				
Rated Output Power (kW)	60	70	75	
Max. Active Power (kW)	60	70	75	
Nominal Output Voltage / Range (V)	3L/N/PE 127V/220V, 133V/230V			
Rated Grid Frequency (Hz)	60Hz/55Hz-65Hz, 50Hz/45Hz-55Hz			
Operating Phase	Three Phase			
Rated AC Grid Output Current (A)	157.5/150.4	183.8/175.5	196.9/188	
Max. AC Output Current (A)	157.5/150.4	183.8/175.5	196.9/188	
Output Power Factor	>0.99			
Total Harmonics Current Distortion (THDi)	<3%			
DC Injection Current (mA)	<0.5%			
Efficiency				
Max. Efficiency	98.8%			
Euro Efficiency	98.3%			
MPPT Efficiency	>99%			
Protection				
DC Reverse-Polarity Protection	Yes			
AC Short Circuit Protection	Yes			
AC Output Overcurrent Protection	Yes			
Output Overvoltage Protection	Yes			
Insulation Resistance Protection	Yes			
Ground Fault Monitoring	Yes			
Anti-islanding Protection	Yes			
Temperature Protection	Yes			
Integrated DC Switch	Yes			
Remote Software Upload	Yes			
Remote Change of Operating Parameters	Yes			
Surge Protection	DC Type II / AC Type II			
General Data				
Cabinet Size (WxHxD mm)	1006×516×325.5 (Excluding Connectors and Brackets)			
Weight (kg)	103			
Topology	Transformerless			
Internal Consumption	<1W (Night)			
Running Temperature	-25-60°C, >45°C Derating			
Ingress Protection	IP65			
Noise Emission (Typical)	≤65 dB			
Cooling Concept	Smart Cooling			
Permissible Altitude (m)	4000			
Designed Lifetime	>20 Years			
Grid Connection Standard	NBR 16149, NBR 16150, EN 50549, RD 140			
Operating Surroundings Humidity	0-100%			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
Features				
Display	LCD 240 × 160			
Interface	RS485/RS232/Wifi/LAN			