



Follow WeChat

Deye 德業®

Ningbo Deye Inverter Technology Co.,Ltd.
Add:No.26-30,South Yongjiang Road,Daqi
Beilun,Ningbo,China.

☎ Tel: 0086-0574-86120560

Fax: 0086-0574-86228852

✉ E-mail: tongml@deye.com.cn
P.C: 315806

🌐 Web: www.deyeinverter.com
www.deye.com.cn
deyeinverter.en.alibaba.com



Deye 德業®

About Deye


Ningbo Deye Inverter Technology Co., Ltd. is a high-tech enterprise belongs to Deye technology group. We have always been committed to the research and development the production of solar inverter and continue to pursue technological innovation. With accurate MPPT algorithm technology, according to the weather conditions to play the maximum efficiency of energy storage and household use, to achieve maximum spontaneous use; Enhanced SVPWM -> DPWM and improve the conversion efficiency of 0.5%; Convenient design and simple installation; Support CAN, RS485, WiFi and GPRS communication; Outdoor IP65 protection level; Have a variety of protection functions; Long design life and warranty time, etc.

Our main products are string inverter, microinverter, hybrid inverter, etc. With a strong research and production capacity, we sell solar inverter to Europe, South America, Australia, Southeast Asia, Africa and other 46 countries and regions. At present we have become one of major global suppliers for solar inverter.

In the self-improvement, change and innovation, the pursuit of excellence, Deye will work with partners hand in hand for a better future!



Microinverter

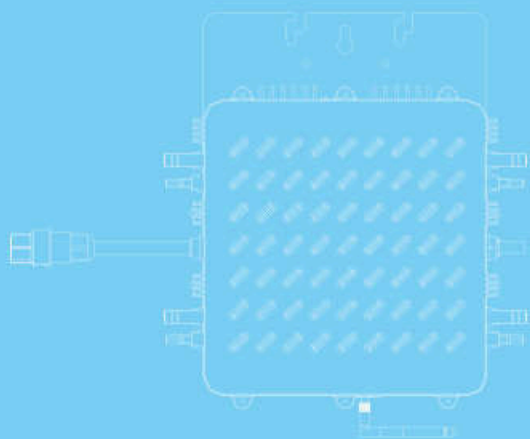

SUN600G2-127V

SUN500G-230-EU

SUN600G2-US-208

SUN600G2-US-240

SUN1200G-230-EU

SUN1300G2-US-208

SUN1300G2-US-240



Microinverter

SUN600G2-US-208/240

SUN500G-230-EU

SUN600G2-127V



Max. Efficiency
96.5%



2 MPPT



Power line/Zigbee
WIFI



IP67
Ingress Protection




High Power
Factor




High Surge
Endurance

Circuit block diagram

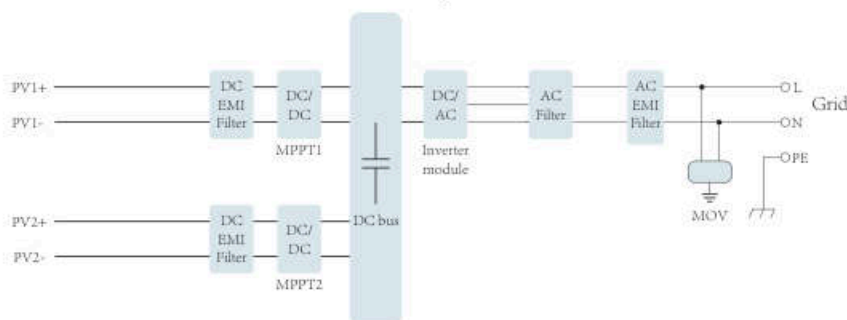

Efficiency curve

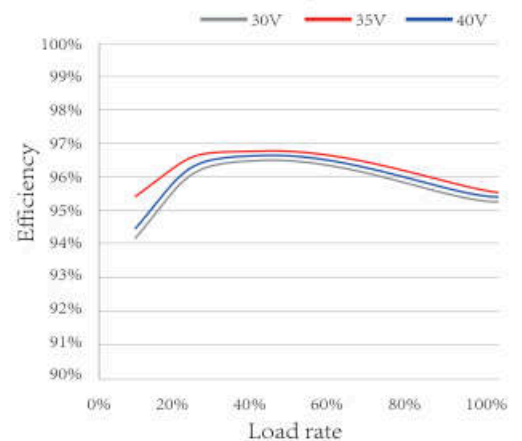

SUN600G2-US-208/240 / SUN500G-230-EU / SUN600G2-127V

Technical Specifications

Input Data(DC)	SUN600G2-US-208/240	SUN500G-230-EU	SUN600G2-127V
Recommended input Power(STC)	210~400W(2 Pieces)		210~400W
Maximum input DC Voltage	60V		60V
MPPT Voltage Range	25~55V		25~55V
Operating DC Voltage Range	20~60V		20~60V
Max DC Short Circuit Current	13A		13A
Max input Current	10.4×2		10.4×2
Output Data(AC)			
Peak output Power	600W		500W
Maximum output Power	600W		500W
Maximum output Current	2.884A / 2.5A	2.17A	4A
Nominal Voltage / Range	208V / 183~229V 240V / 211~264V	a.c.184~265V @230Vac	a.c.95~155V @127Vac
Nominal Frequency /Range	60.0 / 59.3~60.5Hz	50.0 / 47.5~51.5Hz	60.0 / 59.3~60.5Hz
Extended Frequency / Range	60.0 / 55~65Hz	50.0 / 45~55Hz	60.0 / 55~65Hz
Power Factor	>0.95		>0.95
Maximum units per branch	8		5
Efficiency			
CEC Weighted Efficiency	95%		
Peak Inverter Efficiency	96.5%		
Static MPPT Efficiency	99%		
Night Time Power Consumption	50mW		
Mechanical Data			
Ambient Temperature Range	-40~65 C		
Dimensions (W×H×D)	187.6×163.6×29(Without mounting bracket and cable)		
Weight	2.2kg		
Cooling	Natural convection-No fans		
Enclosure Environmental Rating	IP67		
Features			
Compatibility	Compatible with 60~82 cell PV modules		
Communication	Power line / WIFI		
Compliance	UL1741、VDE0126、VDE4105、IEC62109、CE		
Warranty	10 years		


Microinverter

SUN1300G2-US-208/240

SUN1200G-230-EU



Max. Efficiency
96.5%



4 MPPT



Power line/Zigbee
WIFI



IP67
Ingress Protection




High Power
Factor




High Surge
Endurance

Circuit block diagram

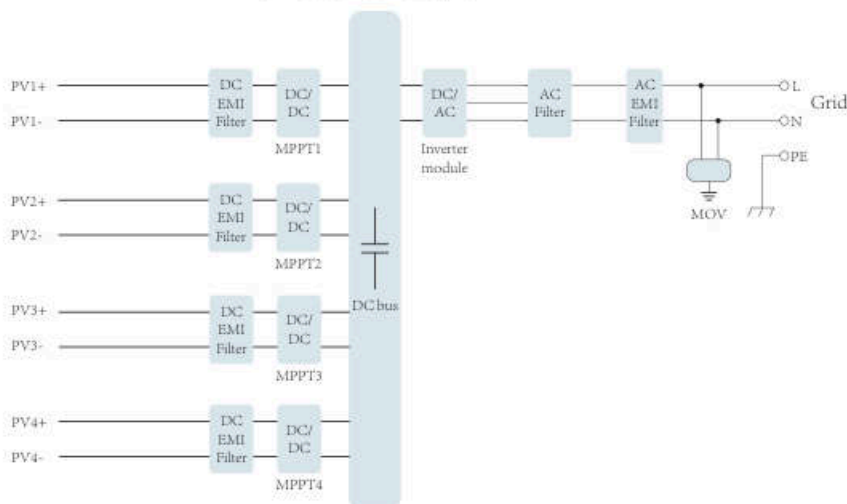

Efficiency curve

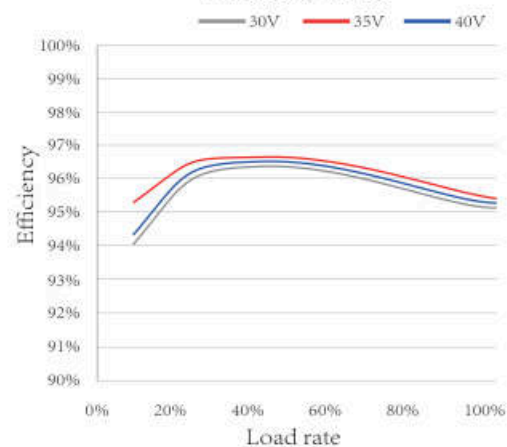

Technical Specifications

Input Data(DC)	SUN1300G2-US-208/240	SUN1200G-230-EU
Recommended input Power(STC)	210~400W(4 Pieces)	
Maximum input DC Voltage	60V	
MPPT Voltage Range	25~55V	
Operating DC Voltage Range	20~60V	
Max DC Short Circuit Current	13A	
Max input Current	10.4×4	
Output Data(AC)		
Peak output Power	1300W	
Maximum output Power	1300W	
Maximum output Current	6.25A / 5.416A	4.34A
Nominal Voltage / Range	208V / 183~229V 240V / 211~264V	a.c.184~265V @230Vac
Nominal Frequency /Range	60.0 / 59.3~60.5Hz	50.0 / 47.5~51.5Hz
Extended Frequency / Range	60.0 / 55~65Hz	50.0 / 45~55Hz
Power Factor	>0.95	
Maximum units per branch	4	
Efficiency		
CEC Weighted Efficiency	95%	
Peak Inverter Efficiency	96.5%	
Static MPPT Efficiency	99%	
Night Time Power Consumption	50mW	
Mechanical Data		
Ambient Temperature Range	-40~65 C	
Dimensions (W×H×D)	450×455×35(Without mounting bracket and cable)	
Weight	6.5kg	
Cooling	Natural convection-No fans	
Enclosure Environmental Rating	IP67	
Features		
Compatibility	Compatible with 60~82 cell PV madules	
Communication	Power line / WIFI	
Compliance	UL1741、VDE0126、VDE4105、IEC62109、CE	
Warranty	10 years	



Accessory & Monitoring




 SOLARMAN | Smart PV Monitoring Platform

SOLARMAN | Smart PV Monitoring Platform



Deye residential monitoring solution take great care to ensure that your PV system is in excellent operation throughout its entire life-cycle. This monitoring solution offer you details information of your power generating plant including Today energy, Monthly energy, yearly energy, total energy etc, through wireless communication with your router to the internet by an smart wifi plug. User can easily access to the monitoring page via PC web or phone APP.

Maximum your energy output while minimizing your costs. Scan here to build your power station !

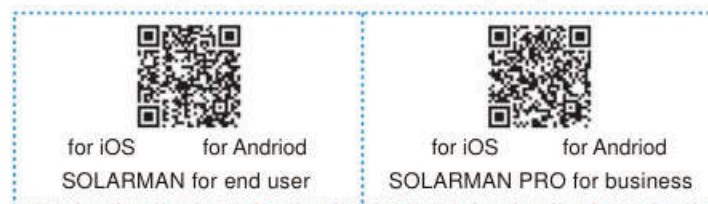

Efficiency

- Open station supports one-click installation and registration;
- Problem support one-click dispatch and navigation.



Safe

- Safe operation, traceable logs, etc;
- Support full lifecycle data storage to ensure data security and reliability.

