


605117
STOCK CODE

Deye

SOLAR WATER PUMP

PRODUCT SPECIFICATION SHEET

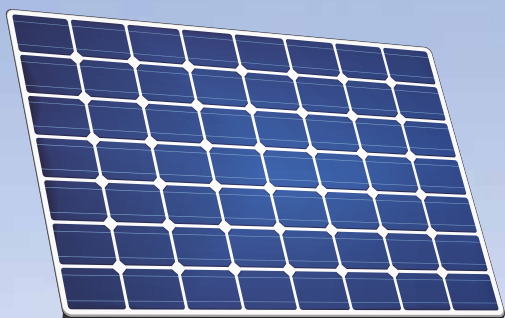


- 0.4-3.0Kw Submersible Solar Pump
- 1.1-2.2Kw Surface Solar Pump
- 1.1-2.2Kw Swimming Pool Solar Pump
- 5.5-13Kw High Speed Submersible Solar Pump



Controller Model	Pump Power (W)	DC Voltage Input Range (V)	Maximum DC Input Current (A)	AC Voltage Input Range (V)	Maximum AC Input Current (A)	Maximum Power Input (W)	Optimum Input Voltage (V)	Operation Mode	IP Rating	Operating Temperature Range (°C)	Net / Gross Weight (kg)
[Auto-switch] DY-D3600AC/DC	1100	80-430	20	136-264	24	1700	130-400	AC/DC Switching	IP65	-15 ~ 60	2.2 2.6
	1500					2050	160-400				
	2200					2850	220-400				
	3000					3000	280-400				

Auto-switch AC/DC Controller and Pump Wiring Diagram

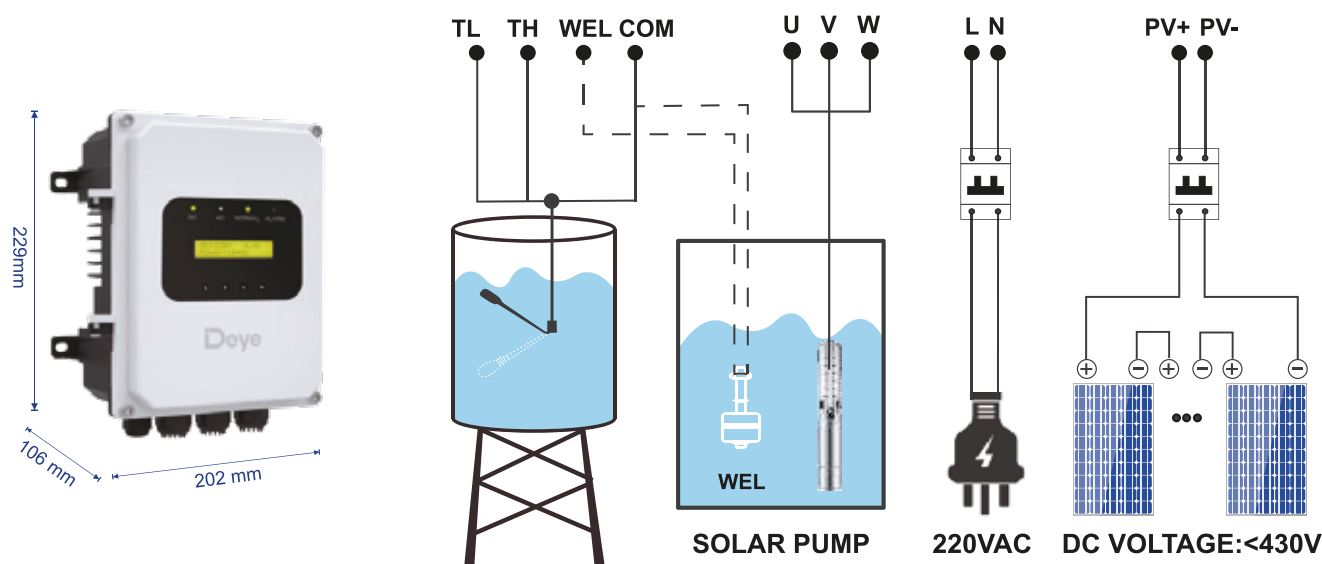

Technical Characteristics



Control Chip
Imported main control chip



Intelligent Protection on Motor Drive
Never-burn machine



Permanent Magnet Synchronous Motor
Position-free on field-oriented control



Wide Voltage Input
80~430V DC, 136~264V AC



Solar Power Input
Prioritize solar power



Solar MPPT
MPPT tracking technology



Real-Time Data Model
Real-time data monitoring, optimizing the system



Error Code Memory
Error reporting, storing fault code history, simplifying troubleshooting




Smart 7/24 Timer
Automation and energy saving



Liquid Crystal Display
Enhanced user convenience and experience

3 C1100 / PC 4.5 - 165

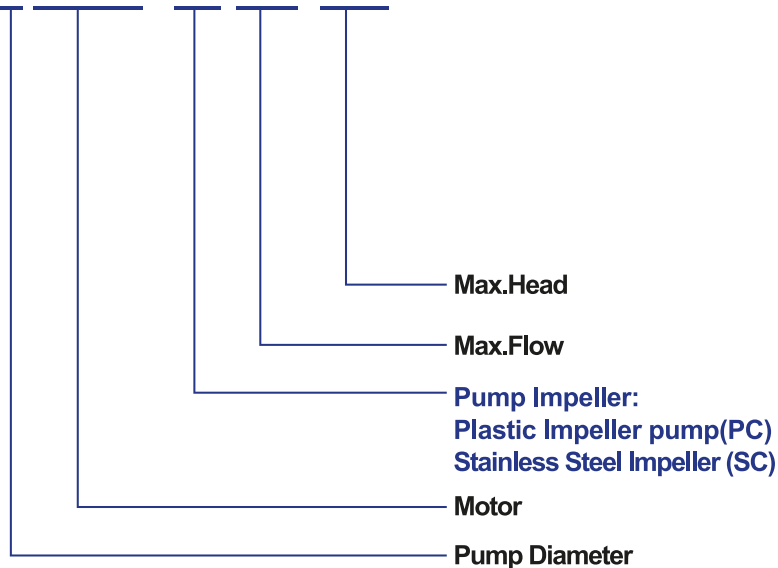

**Plastic
(PC)**



**Stainless steel
(SC)**

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

3" 4" Operating Conditions

Maximum fluid temperature up to +30°C
Maximum sand content : 0.25%
Minimum well diameter : 3" 4"

Motor and Pump

NEMA dimension standards

Plastic Impeller Pump (PC)

Components	Material
Pump external casing	AISI 304 SS
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	Plastic.PC
Impeller	Plastic.POM
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	① Cast-iron ② Cast-Cu ASTM C8850 ③ AISI 304 SS
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

4" 6" Operating Conditions



Maximum fluid temperature up to +50°C
Maximum sand content : 0.25%
Minimum well diameter : 4" 6"

Motor and Pump

NEMA dimension standards

Stainless Steel Impeller (SC)

Components	Material
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	AISI 304 SS
Impeller	AISI 304 SS
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	① Cast-iron ② Cast-Cu ASTM C8850 ③ AISI 304 SS
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic)
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

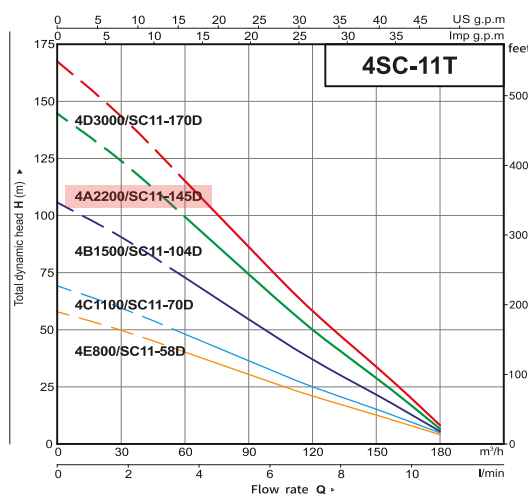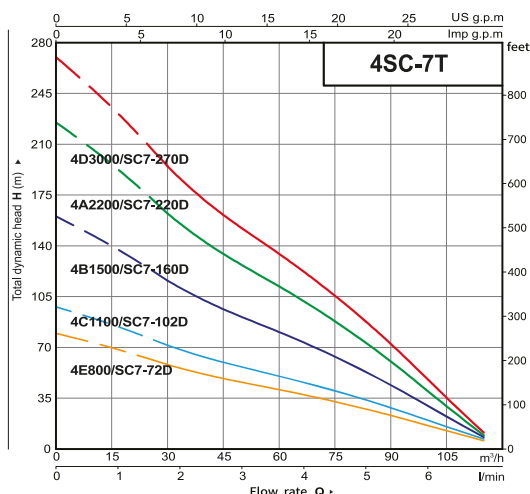

4SC-7T TECHNICAL DATE

Model	Power (W)	Voltage (V)	DELIVERY n_{max}≈4500r/min										
			Q	m³/h	0	0.9	1.8	2.4	3.6	4.5	5.4	6.3	6.9
				l/min	0	15	30	45	60	75	90	105	115
4E800/SC7-72D	800	90~160	H(m)		72	67	61	51	46	36	27	17	9
4C1100/SC7-102D	1100	130~200			102	97	96	86	68	55	43	23	12
4B1500/SC7-160D	1500	160~240			160	151	130	116	90	70	49	28	15
4A2200/SC7-220D	2200	220~400			220	215	190	168	128	100	73	40	20
4D3000/SC7-270D	3000	280~400			270	258	240	182	158	140	105	70	38

DIMENSIONS AND WEIGHTS

P= PUMP BODY M= MOTOR T= WATER PUMP

Model	Controller		Max.Outside Diameter	DN	Dimension (mm)			Weight (kg)		
					P	M	T	P	M	T
4E800/SC7-72D	DY-D2000DC		100mm	1.5"	260	269	529	2.3	5.5	7.8
4C1100/SC7-102D	DY-D2000DC	DY-D3600AC/DC			302	284	586	2.8	6.3	9.1
4B1500/SC7-160D	DY-D2000DC	DY-D3600AC/DC			386	309	695	3.6	7.3	10.9
4A2200/SC7-220D	DY-D3600AC/DC				470	329	799	4.5	8.0	12.5
4D3000/SC7-270D	DY-D3600AC/DC				533	329	862	5.2	8.0	13.2

4SC-11T TECHNICAL DATE

Model	Power (W)	Voltage (V)	DELIVERY n_{max}≈4500r/min										
			Q	m³/h	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6
				l/min	0	20	40	60	80	100	120	140	160
4E800/SC11-58D	800	90~160	H(m)		58	55	53	43	34	27	21	14	6
4C1100/SC11-70D	1100	130~200			70	67	65	59	50	41	34	26	17
4B1500/SC11-104D	1500	160~240			104	100	90	84	72	62	51	40	28
4A2200/SC11-145D	2200	220~400			145	137	131	115	98	81	65	49	30
4D3000/SC11-170D	3000	280~400			170	163	143	124	121	102	86	60	41

DIMENSIONS AND WEIGHTS

P= PUMP BODY M= MOTOR T= WATER PUMP

Model	Controller		Max.Outside Diameter	DN	Dimension (mm)			Weight (kg)		
					P	M	T	P	M	T
4E800/SC11-58D	DY-D2000DC		100mm	1.5"/2"	235	269	504	2.2	5.5	7.7
4C1100/SC11-70D	DY-D2000DC	DY-D3600AC/DC			256	284	540	2.4	6.3	8.7
4B1500/SC11-104D	DY-D2000DC	DY-D3600AC/DC			298	309	607	2.8	7.3	10.1
4A2200/SC11-145D	DY-D3600AC/DC				361	329	690	3.6	8.0	11.6
4D3000/SC11-170D	DY-D3600AC/DC				407	329	736	4.0	8.0	12.0