


# Three Phase String Inverter

## SUN-120/125/130/135/136K-G01P3-EU-AM8

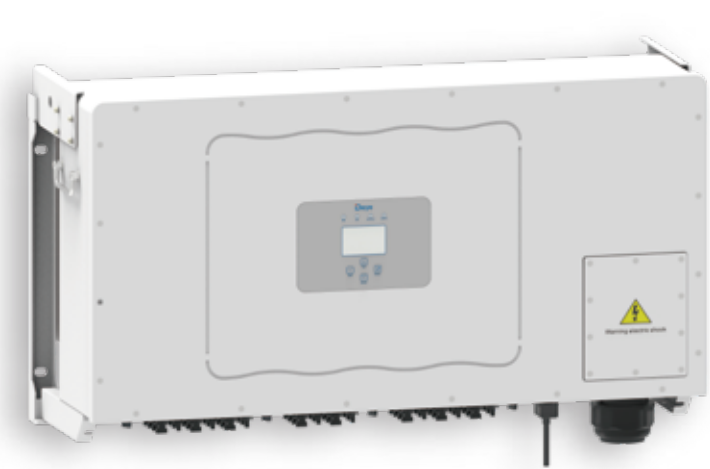

-  8 MPP trackers,  
Max. efficiency up to 98.8%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Type II DC/AC SPD

### Technical Data

| Model                                     | SUN-120K-G01P3<br>-EU-AM8                                                                                                              | SUN-125K-G01P3<br>-EU-AM8 | SUN-130K-G01P3<br>-EU-AM8 | SUN-135K-G01P3<br>-EU-AM8 | SUN-136K-G01P3<br>-EU-AM8 |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Input Side                                |                                                                                                                                        |                           |                           |                           |                           |
| Max. DC Input Power (kW)                  | 180                                                                                                                                    | 187.5                     | 195                       | 202.5                     | 204                       |
| Max. DC Input Voltage (V)                 | 1100                                                                                                                                   |                           |                           |                           |                           |
| Start-up DC Input Voltage (V)             | 250                                                                                                                                    |                           |                           |                           |                           |
| MPPT Operating Range (V)                  | 200-1000                                                                                                                               |                           |                           |                           |                           |
| Max. DC Input Current (A)                 | 40+40+40+40+40+40+40+40                                                                                                                |                           |                           |                           |                           |
| Max. Short Circuit Current (A)            | 60+60+60+60+60+60+60+60                                                                                                                |                           |                           |                           |                           |
| No.of MPP Trackers                        | 8                                                                                                                                      |                           |                           |                           |                           |
| No.of Strings per MPP Tracker             | 4+4+4+4+4+4+4+4                                                                                                                        |                           |                           |                           |                           |
| Output Side                               |                                                                                                                                        |                           |                           |                           |                           |
| Rated Output Power (kW)                   | 120                                                                                                                                    | 125                       | 130                       | 135                       | 136                       |
| Max. Active Power (kW)                    | 132                                                                                                                                    | 135                       | 135                       | 135                       | 136                       |
| Nominal Output Voltage / Range (V)        | 3L/N/PE 220/380V, 230/400V                                                                                                             |                           |                           |                           |                           |
| Rated Grid Frequency (Hz)                 | 50 / 60 (Optional)                                                                                                                     |                           |                           |                           |                           |
| Operating Phase                           | Three Phase                                                                                                                            |                           |                           |                           |                           |
| Rated AC Grid Output Current (A)          | 181.9/174                                                                                                                              | 189.4/181.2               | 197/188.5                 | 204.6/195.7               | 206.1/197.2               |
| Max. AC Output Current (A)                | 200/191.4                                                                                                                              | 204.6/195.7               | 204.6/195.7               | 204.6/195.7               | 206.1/197.2               |
| Output Power Factor                       | >0.99                                                                                                                                  |                           |                           |                           |                           |
| Total Harmonics Current Distortion (THDi) | <3%                                                                                                                                    |                           |                           |                           |                           |
| DC Injection Current (mA)                 | <0.5%                                                                                                                                  |                           |                           |                           |                           |
| Grid Frequency Range                      | 45~55 or 55~65 (Optional)                                                                                                              |                           |                           |                           |                           |
| Efficiency                                |                                                                                                                                        |                           |                           |                           |                           |
| Max. Efficiency                           | 98.8%                                                                                                                                  |                           |                           |                           |                           |
| Euro Efficiency                           | 98.3%                                                                                                                                  |                           |                           |                           |                           |
| MPPT Efficiency                           | >99%                                                                                                                                   |                           |                           |                           |                           |
| Protection                                |                                                                                                                                        |                           |                           |                           |                           |
| DC Reverse-Polarity Protection            | Yes                                                                                                                                    |                           |                           |                           |                           |
| AC Short Circuit Protection               | Yes                                                                                                                                    |                           |                           |                           |                           |
| AC Output Overcurrent Protection          | Yes                                                                                                                                    |                           |                           |                           |                           |
| Output Overvoltage Protection             | Yes                                                                                                                                    |                           |                           |                           |                           |
| Insulation Resistance Protection          | Yes                                                                                                                                    |                           |                           |                           |                           |
| Ground Fault Monitoring                   | Yes                                                                                                                                    |                           |                           |                           |                           |
| Anti-islanding Protection                 | Yes                                                                                                                                    |                           |                           |                           |                           |
| Temperature Protection                    | Yes                                                                                                                                    |                           |                           |                           |                           |
| Integrated DC Switch                      | Yes                                                                                                                                    |                           |                           |                           |                           |
| Remote Software Upload                    | Yes                                                                                                                                    |                           |                           |                           |                           |
| Remote Change of Operating Parameters     | Yes                                                                                                                                    |                           |                           |                           |                           |
| Surge Protection                          | DC Type II / AC Type II                                                                                                                |                           |                           |                           |                           |
| General Data                              |                                                                                                                                        |                           |                           |                           |                           |
| Cabinet Size (WxHxD mm)                   | 1006×516×325.5 (Excluding Connectors and Brackets)                                                                                     |                           |                           |                           |                           |
| Weight (kg)                               | 103                                                                                                                                    |                           |                           |                           |                           |
| Topology                                  | Transformerless                                                                                                                        |                           |                           |                           |                           |
| Internal Consumption                      | <1W (Night)                                                                                                                            |                           |                           |                           |                           |
| Running Temperature                       | -25-60°C, >45°C Derating                                                                                                               |                           |                           |                           |                           |
| Ingress Protection                        | IP65                                                                                                                                   |                           |                           |                           |                           |
| Noise Emission (Typical)                  | ≤65 dB                                                                                                                                 |                           |                           |                           |                           |
| Cooling Concept                           | Smart Cooling                                                                                                                          |                           |                           |                           |                           |
| Permissible Altitude (m)                  | 4000                                                                                                                                   |                           |                           |                           |                           |
| Designed Lifetime                         | >20 Years                                                                                                                              |                           |                           |                           |                           |
| Grid Connection Standard                  | IEC 61727, IEC 62116, CEI 0-21, CEI 0-16, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105, VDE-AR-N 4110 |                           |                           |                           |                           |
| Operating Surroundings Humidity           | 0-100%                                                                                                                                 |                           |                           |                           |                           |
| Safety EMC / Standard                     | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2                                                                                 |                           |                           |                           |                           |
| Features                                  |                                                                                                                                        |                           |                           |                           |                           |
| Display                                   | LCD 240 × 160                                                                                                                          |                           |                           |                           |                           |
| Interface                                 | RS485/RS232/Wifi/LAN                                                                                                                   |                           |                           |                           |                           |